VP-23W1/VP-25W1 User Manual

Version 1.0.9, October 2012

Service and usage information for

VP-23W1

VP-25W1

Written by Mac Cho

Edited by Anna Huang

Warranty

All products manufactured by ICP DAS are under warranty regarding defective materials for a period of one year, beginning from the date of delivery to the original purchaser.

Warning

ICP DAS assumes no liability for any damage resulting from the use of this product. ICP DAS reserves the right to change this manual at any time without notice. The information furnished by ICP DAS is believed to be accurate and reliable. However, no responsibility is assumed by ICP DAS for its use, not for any infringements of patents or other rights of third parties resulting from its use.

Copyright

Copyright @ 2012 by ICP DAS Co., Ltd. All rights are reserved.

Trademark

The names used for identification only may be registered trademarks of their respective companies.

Contact US

If you have any problem, please feel free to contact us.

You can count on us for quick response.

Email: service@icpdas.com

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Table of Contents

Table of Contents 3

1. Introduction 7

1.1. Features 8
1.2. Specifications 10
1.3. Overview 12
1.4. Dimensions 17
1.5. Companion CD 19

2. Getting Started 20

2.1. Mounting the Hardware 21
2.1.1. Removing the Slot Cover 21
2.1.2. Installing Expansion I/O Sockets 22
2.1.3. Inserting the I/O Modules 23
2.1.4. Mounting the Waterproof 25
2.1.5. Mounting the ViewPAC 27
2.1.6. Deploying a Basic ViewPAC Application 29
2.2. Installing the Tools and Utilities 30
2.3. Configuring the Boot Mode 31
2.4. Changing the User Interface Language 35
2.5. Testing the ViewPAC 37
2.6. Using ViewPAC Utility to manage the ViewPAC 39
2.7. Using DCON Utility to Configure the I/O Modules 40
2.8. Using Backup Utility to Backup the settings and files 43
2.9. A caution about using System_Disk 45

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3. Tools and Tasks 46

3.1. DCON Utility 49
3.2. NAPOPC_CE5 50
3.3. SendToCOM 51
3.4. VCEP 52
3.5. ViewPAC Utility 53
3.5.1. Menu Bar 54
3.5.2. Property Tabs 59

4. Your First ViewPAC Program 71

4.1. Preparing the Development Tools 71
4.2. Installing ViewPAC SDKs 72
4.3. Understanding the ViewPAC APIs 73
4.3.1. ViewPAC SDK Overview 74
4.3.2. ViewPAC SDK Reference 78
4.4. Your First Program in C# 80
4.4.1. Create a new project 81
4.4.2. Add project reference for an application 83
4.4.3. Design and Build an application program 84
4.4.4. Execute the application on the ViewPAC 88
4.5. Your First Program in VB.net 90
4.5.1. Create a new project 91
4.5.2. Add project reference for an application 93
4.5.3. Design and Build an application program 94
4.5.4. Execute the application on the ViewPAC 97
4.6. Your First Program in eMbedded Visual C++ 99
4.6.1. Create a new Forms-Based project 100
4.6.2. Configure compiler options 105
4.6.3. Specify the path for project reference 106

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.4. Design and Build an application program 110
4.6.5. Execute the application program on ViewPAC 115

5. APIs and Demo References 80

5.1. Demo programs with C# 117
5.1.1. C# Demo program for WinPAC Standard API 117
5.1.2. C# Demo program for PAC IO API 119
5.1.3. C# Demo program for ViewPAC Particular API 122
5.2. Demo Programs with eMbedded Visual C++ 124
5.2.1. eVC Demo program for WinPAC Standard API 125
5.2.2. eVC Demo program for PAC IO API 127
5.2.3. eVC Demo program for ViewPAC Particular API 131

6. ViewPAC Updates 133

6.1. OS updates 134
6.1.1. Updating the Boot Loader and the ViewPAC OS image from files . 137
6.1.2. Updating the ViewPAC OS image from eshell 142
6.2. SDKs Updates 147
6.2.1. WinPAC SDK updates for C# or VB.net 149
6.2.2. WinPAC SDK updates for eMbedded Visual C++ 150

7. ViewPAC Download Center 151

Appendix A. I-8K and I-87K Modules 153

Appendix B. Application of RS-485 Network 154

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.1. Basic RS-485 Network 155
B.2. Daisy Chain RS-485 Network 156
B.3. Star Type RS-485 Network 157
B.4. Random RS-485 Network 159
B.5. Master/Slaves Settings 160
B.5.1. ViewPAC as a Master (default) 160
B.5.2. ViewPAC as a Slave: 162

Appendix C. Tips – How to 164

C.1. How to add a user account to remote login the ViewPAC from PC 165
C.2.1. How to add a user account 165
C.2.2. How to Use telnet to remote login the ViewPAC from PC 167
C.2.3. How to remove the user from the login list 169
C.2. How to online debug ViewPAC 171
C.2.1. Debug ViewPAC programs in EVC++ 171
C.2.2. Debug ViewPAC programs in Visual Studio 2005/2008 181
C.3. How to recompile WinCon programs 190
C.3.1. Compiler old programs which ran on Wincon 8x3x and 8x4x 191
C.3.2. Modify .vcp file to upgrade the old WinCon project 195
C.4. How to use the printer 196
C.4.1. How to use network printer 197
C.4.2. How to use printer via USB 199
C.5. How to use services tool 200

Appendix D. Revision History 203

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1. Introduction

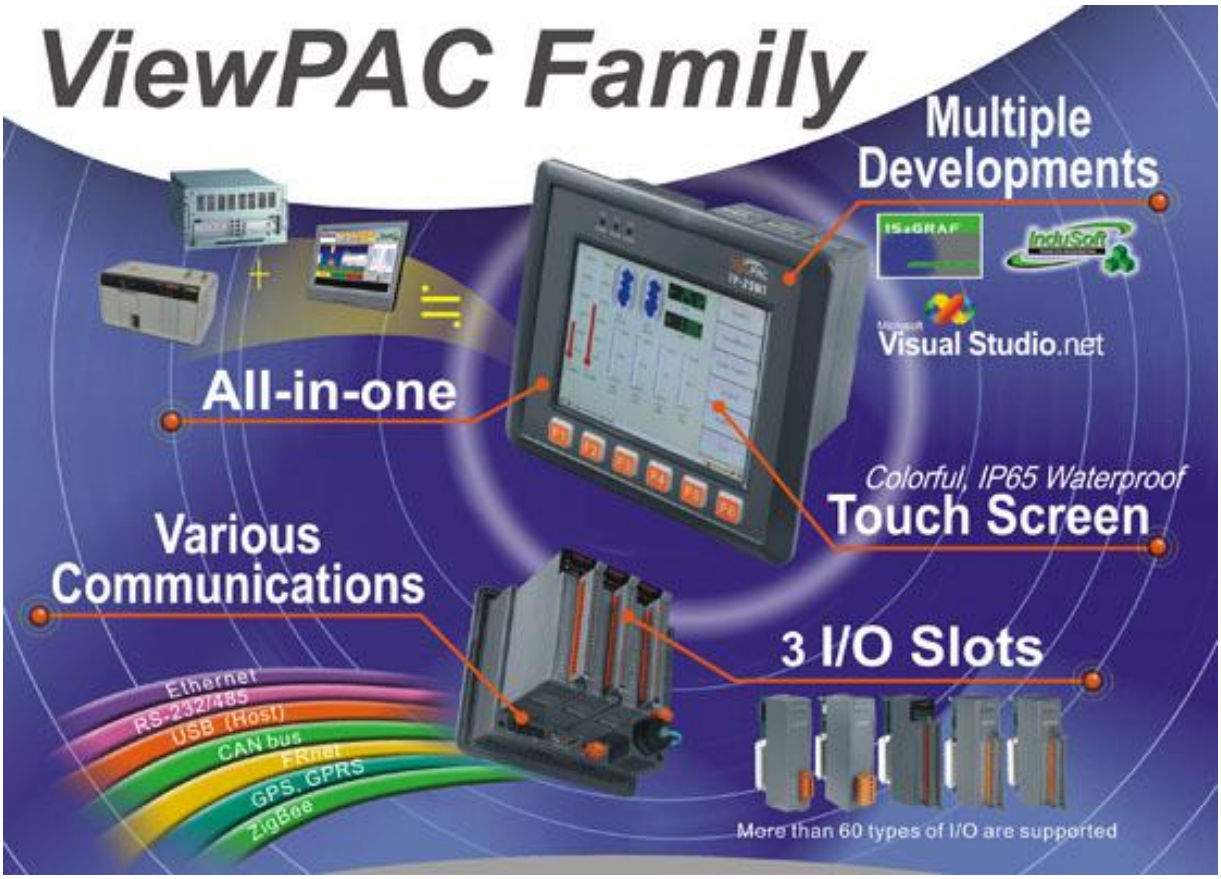

ViewPAC combines WinPAC, graphic display and keypad in one unit. It equips a PXA270 CPU (520 MHz) running Windows CE.NET 5.0 operating system, various connectivity (USB, Ethernet, RS-232/485), 3 slots to expand I/O modules, 3.5”/5.7” TFT LCD and a rubber keypad.

Its operating system, Windows CE.NET 5.0, has many advantages, includes hard real-time capability, small core size, fast boot speed, interrupt handling at a deeper level, achievable deterministic control and low cost. Running Windows CE.NET 5.0 in the ViewPAC gives it the ability to run PC-based control software such as Visual Basic.NET, Visual C#, Embedded Visual C++, SCADA software, Soft PLC …etc.

Compared with traditional IPC + PLC solutions, ViewPAC reduces overall system cost, space and gives you all the best features of IPC and PLC

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1.1. Features

The ViewPAC offers the most comprehensive configuration and remote system upgrade solutions to meet specific application requirements. The following list shows the hardware and software features designed to simplify installation, configuration and application.

Software Features

- Windows CE .Net 5.0 Inside
- Easy Remote Maintenance via Ethernet
  1. FTP Server
  2. VCEP Software
- Built-In OPC Server: NAPOPC_CE5
  1. An OPC Server for SCADA Software
  2. Integrates Local/Remote I/O Modules via RS-232/485 or Ethernet
  3. Provides Library for eVC, C#, or VB.NET
  4. Supports Modbus and DCON Protocols
- Development Software

  Visual Studio.NET 2005/2008, and eVC
- SDK/Demo Programs for C#, VB.NET & eVC

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Hardware Features

- PXA 270 CPU (32-bit & 520 MHz)
- IP65 Compliant Front Panel
- 3.5”/5.7” TFT LCD (5.7” LCD is with Touch Panel)
- Rubber Keypad with 24/6 Keys
- Audio with MIC-In and Line-Out
- 64-bit Hardware Serial Number for Software Protection
- 3 Slots for High Profile I/O Modules
- Rich I/O Expansion Ability

  1. Ethernet
  2. RS-232/422/485
  3. FRnet
  4. CAN bus

- Dual Battery Backup SRAM (512 KB)
- One Ethernet Port
- 2 Serial Ports (RS-232, RS-485)
- Operating Temperature: -20 ~ +70 °C

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1.2. Specifications

The table below summarizes the specifications of the ViewPAC.

System Software	VP-23W1	VP-25W1
OS	Windows CE .NET 5.0	
.Net Compact Framework	2.0	
Embedded Service	FTP server, Web server (supports VB script, JAVA script), Embedded SQL server	
SDK Provided	Dll for eVC, Dll for Visual Studio.Net 2005/2008	

CPU Module	VP-23W1	VP-25W1
CPU	PXA270 or compatible (32-bit and 520 MHz)	
SDRAM	128 MB	
Dual Battery Backup SRAM	512 KB (for 5 years data retention)	
Flash	96 MB (64 MB for OS image, 31 MB for built-in Flash disk, 1 MB for registry)	
EEPROM	16 KB (data retention: 40 years; 1,000,000 erase/write cycles)	
Expansion Flash Memory	microSD socket with a microSD card (support up to 16 GB microSDHC card)	
RTC (Real Time Clock)	Provide seconds, minutes, hours, date of week /month; month and year, valid from 1980 to 2079	
64-bit Hardware Serial Number	Yes	
Dual Watchdog Timer	Yes (0.8 second)	
Rotary Switch	Yes (0 ~ 9)	

I/O Expansion Slots	VP-23W1	VP-25W1
Slot Number	3 (for high profile I-8K and I-87K modules only)	
Hot Swap *Will be available	Yes (for high profile I-87K modules only)	

Communication Interface	VP-23W1	VP-25W1
Ethernet Port	RJ45 * 1, 10/100 Base-TX	

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Communication Interface	VP-23W1	VP-25W1
	(Auto-negotiating, Auto MDI/MDIX, LED indicators)	
USB 1.1 (host)	1	
COM0	Internal communication with the high profile I-87K series modules in slots	
COM2	RS-485 (D2+, D2-; self-tuner ASIC inside); 2500 V_{DC} isolated	
COM3	RS-232 (RxD, TxD, CTS, RTS, DSR, DTR, CD, RI and GND); Non-isolated	

Main Machine Interface	VP-23W1	VP-25W1
LCD	3.5” TFT (Resolution 320 x 240)	5.7” TFT (Resolution 640 x 480)
Touch Panel	-	Yes
Rubber Keypad	24 Keys	6 Keys
Audio	Microphone-In and Earphone-Out	
LED Indicators	3 Dual-Color LEDs (PWR, RUN, LAN1, L1, L2, L3; L1 ~ L3 for user programmable)	

Environmental	VP-23W1	VP-25W1
Operating Temperature	-20 ~ +70 °C	
Storage Temperature	-30 ~ +80 °C	
Ambient Relative Humidity	5 ~ 90% RH, non-condensing	

Power	VP-23W1	VP-25W1
Input Range	+10 V ~ +30 V_{DC}	
Isolation	1 kV	
Capacity	2.5 A, 5 V supply to I/O expansion slots	
Consumption	7.2 W (0.3 A @ 24 V_{DC})	

Mechanical	VP-23W1	VP-25W1
Dimension (W x D x H)	182 mm x 158 mm x 125 mm	
Ingress Protection	Front panel: IP65	
Installation	Panel mounting	

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1.3. Overview

The ViewPAC contains several interfaces and peripherals that can be integrated with external systems. Here is an overview of the components and its descriptions. The details of these items are as follows:

1 LED Indicators
2 3.2” 320 x 240 LCM
3 3 Shift/Escape/Enter Keys
4 Arrow Keys
6 Programmable function Keys
11 Alphanumberic/Symbol Keys
1 LED Indicators
2 5.7” 640 x 480 LCM
3 6 Programmable function Keys
4 Micro SD Socket
5 Rotary Switch
6 I/O Expansion Slots
7 Power In and Frame Ground
8 Waterproof Ethernet Port
9 COM2 (RS-485)
10 COM3 (RS-232)
11 USB Port
12 Microphone and Earphone Jacks

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1. LED Indicators

The ViewPAC contains three LED indicators that are located on the top of the unit.

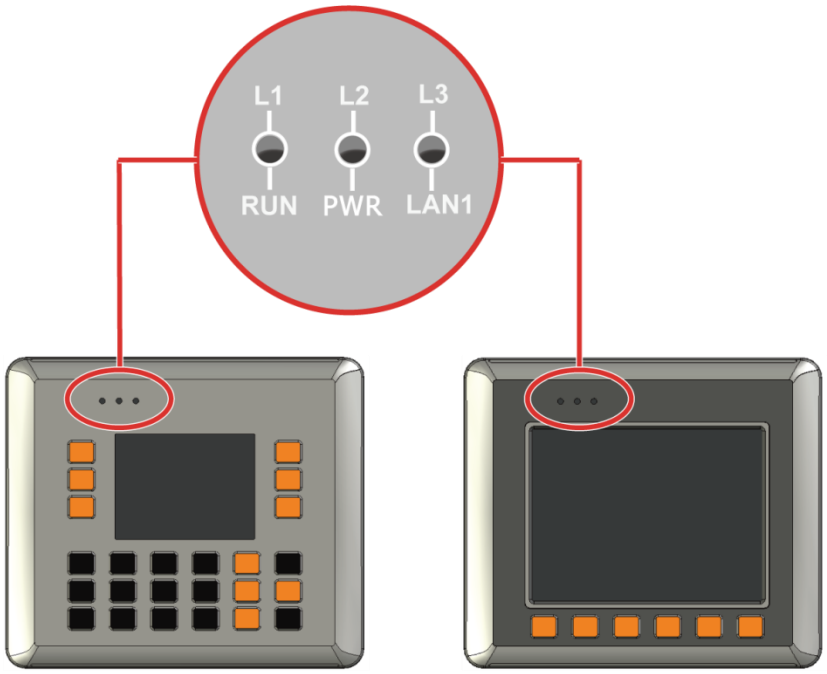

VP-23W1 VP-25W1

The LED indicators can be used to indicate the power status, OS status and Link/Activity, and are described as follows:

LED Indicator	State (Color)	Meaning
L1/L2/L3	ON (Red)	Controlled via a program
	OFF	Controlled via a program
RUN	ON (Green)	The OS is on
	Blink	The System_disk is being formatted or defragmented
PWR	ON (Green)	The Power is ON
	OFF	The Power is OFF
LAN1	ON (Green)	The Link is active
	OFF	The Link is inactive
	Blink (Green)	Network activity

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2. LCM

The LCM size of the VP-23W1 is 3.5” 320 x 240.

The LCM size of the VP-25W1 is 5.7” 640 x 480.

3. Keypad

The keypad on the VP-2000 is used to provide support for keyboard input.

The F1 ~ F6 function keys can also be programmed by the user.

4. Micro SD Socket

The ViewPAC also contains a Micro SD socket that can be used to increase memory capacity to 16 GB.

5. Rotary Switch

The Rotary Switch is an operating mode selector switch which provides seven functions related to the selection of the operating mode and authorization control for the VP-2000.

For more information about the operating mode, please refer to “section 2.2. Configuring the Boot Mode”

6. I/O Expansion Slots

The VP-2000 contains three I/O expansion slots that are used to serve in the local and remote expansion.

7. Power Input and Frame Ground

The VP-2000 contains a power terminal that is used to provide power for its operation.

The terminal block contains 3 pins and the pin assignments are as follows:

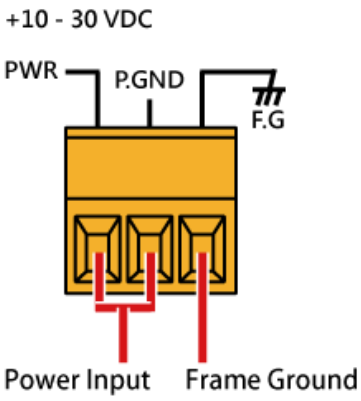

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

8. Waterproof Ethernet Port

The VP-2000 contains an Ethernet port that is waterproof to protect the device from external contaminants.

9. COM2 (RS-485)



The COM2 port provides a connection to external RS-485 devices. The COM2 has 2 pins, as follows:

Baud Rate: 115200, 57600, 38400, 19200, 9600, 4800, bps

Data Bits: 7, 8

Parity: None, Even, Odd, Mark (Always 1), Space (Always 0)

Stop Bits: 1, 2

FIFO: 16 bytes

10. COM3 (RS-232)



The ViewPAC offers one standard RS-232 serial communication interface port, COM3 (9-pin Sub-D plug connector), and it is located on the back of ViewPAC. Refer to figure below for RS-232 port pin assignment.

Port Type: Male

Baud Rate: 115200, 57600, 38400, 19200, 9600, 4800, 2400, 1200 bps

Data Bits: 5, 6, 7, 8

Parity: None, Even, Odd, Mark (Always 1), Space (Always 0)

Stop Bits: 1, 2

FIFO: 16 bytes

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Tips & Warnings

The table below shows the data bit of each COM port and their corresponding stop bit.

Word Length	Number of Stop Bits
5, 6, 7, 8	1
5	1.5
6, 7, 8	2

11. USB Port

The VP-2000 contains a USB port that allows support for USB devices such as mouse, keyboard or an external USB hard drive.

12. Microphone and Earphone Jacks

The VP-2000 contains a microphone and an earphone jack to allow the input and output of audio system.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1.4. Dimensions

The diagrams below provide the dimensions of the standard VP-2000 family to use in defining your enclosure specifications. Remember to leave room for potential expansion if you are using other components in your system.

All dimensions in millimeter.

VP-23W1

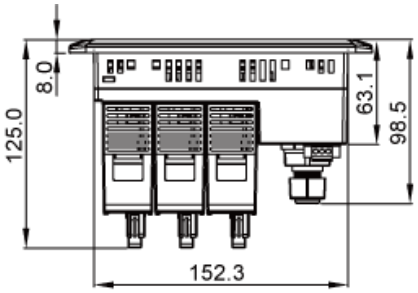

Top View



Recommended
Panel Cut-Out

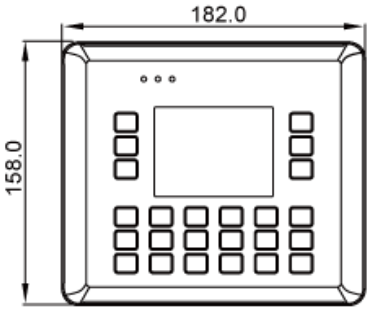

Front View



Right Side View

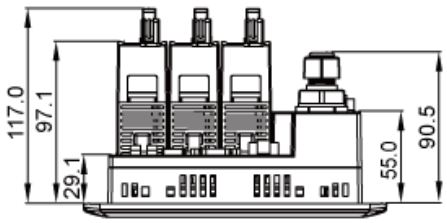

Bottom View

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

VP-25W1

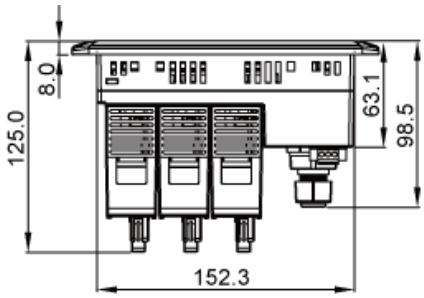

Top View



Recommended
Panel Cut-Out

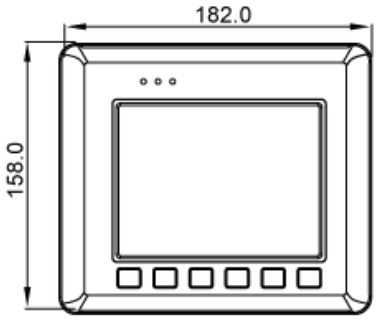

Front View



Right Side View

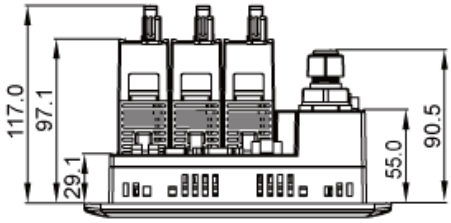

Bottom View

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

1.5. Companion CD

This section describes the content of the companion CD, which provides the resource, tool kit, software and documentation related to the ViewPAC.

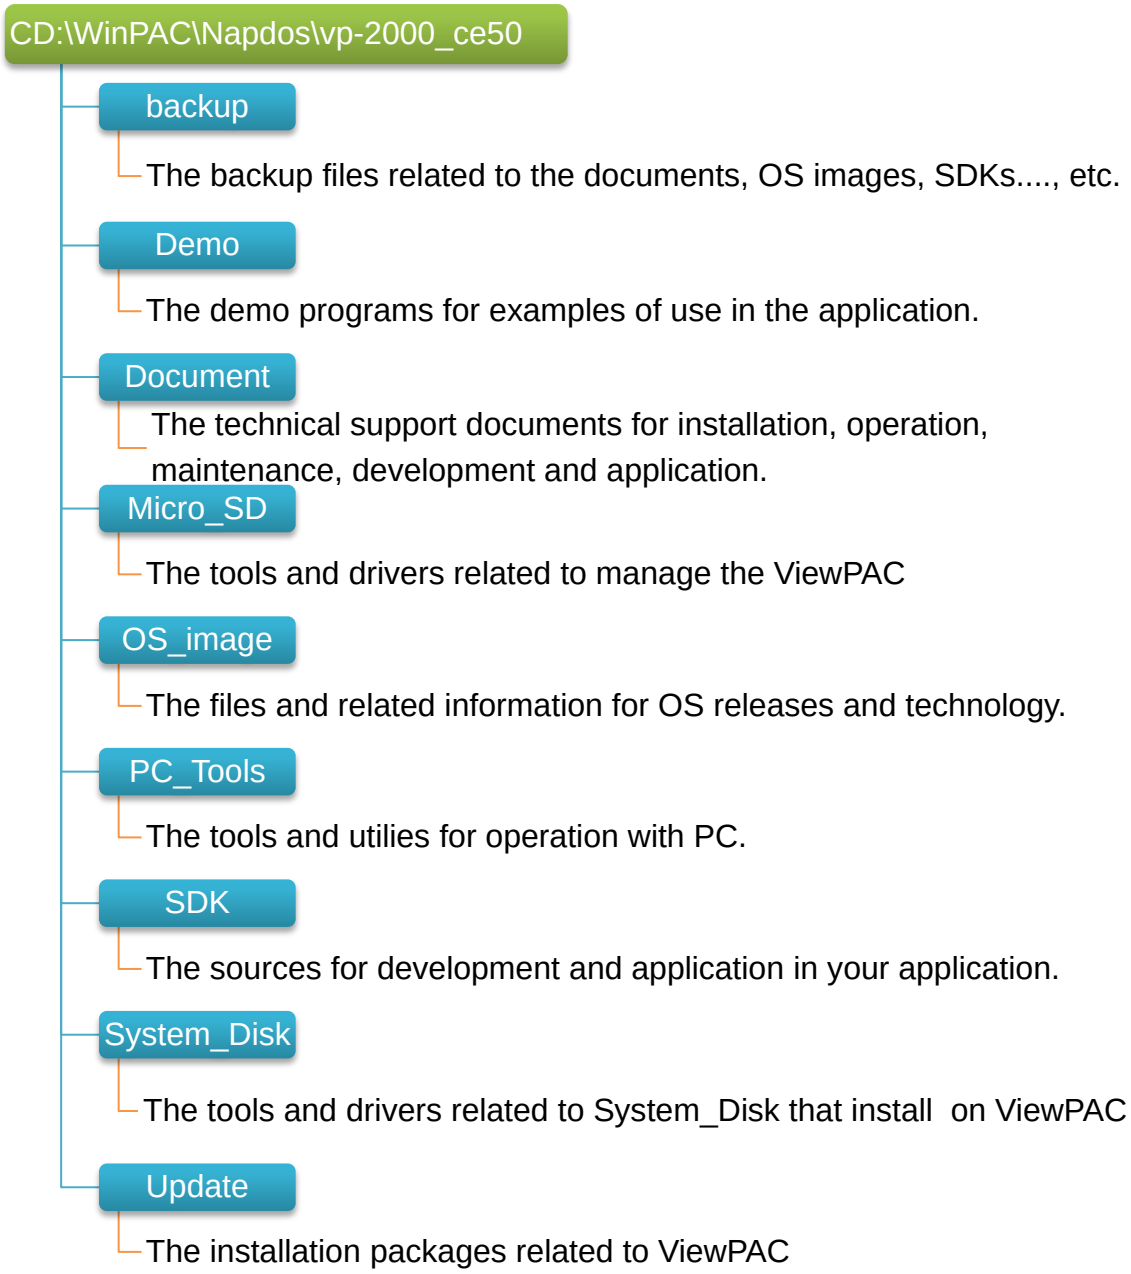
CD:\WinPAC\Napdos\vp-2000_ce50
backup
The backup files related to the documents, OS images, SDKs...., etc.
Demo
The demo programs for examples of use in the application.
Document
The technical support documents for installation, operation, maintenance, development and application.
Micro_SD
The tools and drivers related to manage the ViewPAC
OS_image
The files and related information for OS releases and technology.
PC_Tools
The tools and utilies for operation with PC.
SDK
The sources for development and application in your application.
System_Disk
The tools and drivers related to System_Disk that install on ViewPAC
Update
The installation packages related to ViewPAC

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2. Getting Started

This chapter provides a guided tour that describes the steps needed to download, install, configure, and run the basic procedures for user working with the ViewPAC for the first time.

Before starting any task, please check the package contents. If any of the following package contents are missing or damaged, contact your dealer, or distributor.

In addition to this guide, the package includes the following items:

VP-23W1/VP-25W1 & Touch Pen

Expansion I/O Socket * 3

Software Utility CD

A microSD Card and
A microSD to SD Adapter

Screw Driver

RJ-45 Waterproofing Kit

Panel Clip * 4

M4x35 L Screw *4

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1. Mounting the Hardware

Before you work with the ViewPAC, you should have a basic understanding of hardware specification, such as the dimensions, the usable input-voltage range of the power supply, and the type of communication interfaces.

For more information about the hardware details, see section 1.2., “Specifications.”

For more information about the hardware dimensions, see section 1.4., “Dimension.”

2.1.1. Removing the Slot Cover

The ViewPAC has a slot cover to protect the internal components from damage during shipping. Before starting any installation, please first remove the slot cover.

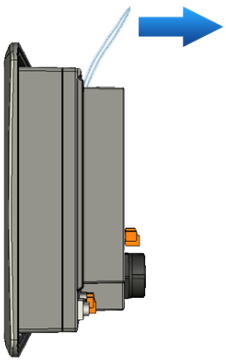

Step 1: Hold the top of ViewPAC

Step 2: Pull the plastic wrap

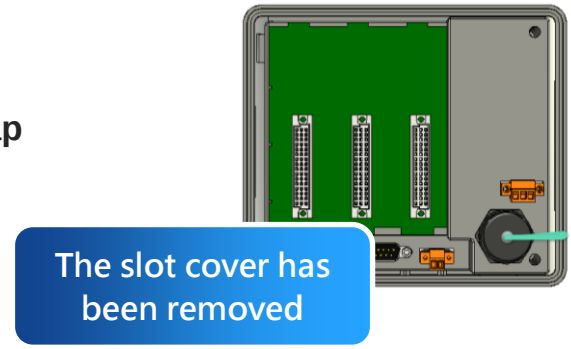

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1.2. Installing Expansion I/O Sockets

The case (a socket and a top case) is included in the package. Before inserting the I/O modules talling the I/O modules in

If you do not expand the I/O module full, please keep the top case of the unused slot to protect the backplane from dirt, dust and damage from foreign objects.

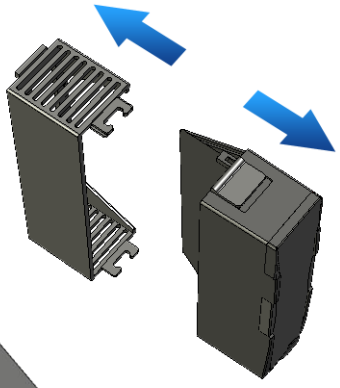

Step 1: Take the socket out from the case

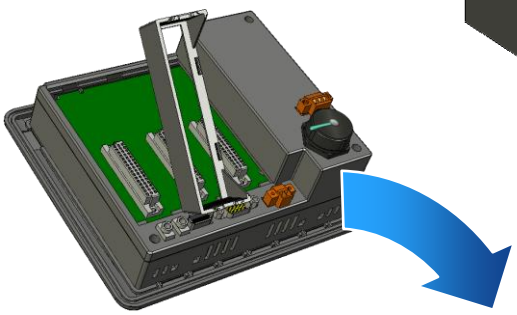

Step 2: Padlock the bottom of the socket into the ViewPAC

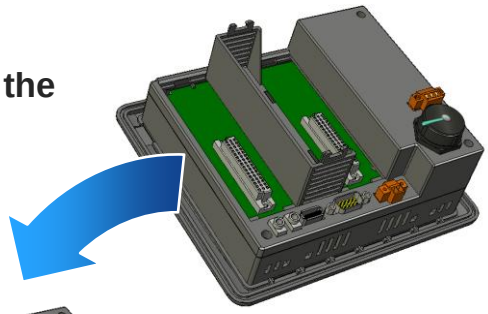

Step 3: Slide the socket into the ViewPAC until it clicks

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1.3. Inserting the I/O Modules

ViewPAC supports a complete range of I/O modules for interfacing many different field devices.

For more information about I/O expansion modules, please refer to:

http://www.icpdas.com/products/PAC/winpac/io_support_list.htm

Step 1: Hold the I/O module vertically and align the socket

Step 2: Carefully press the I/O module onto the socket

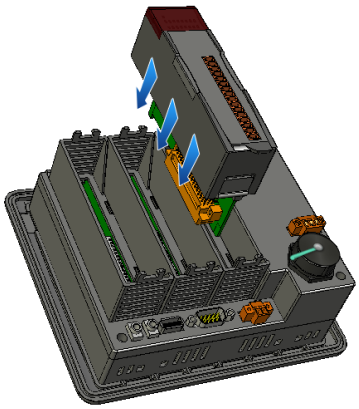

Tips & Warnings

If you do not expand the I/O module full, please keep the top case of the unused slot to protect the backplane from dirt, dust and damage from foreign objects.

Step 3: Read the relevant documentation

Manual

For high profile I-8K series:

CD:\WinPAC\napdos\io_module\
http://www.icpdas.com/products/PAC/winpac/io_support_list.htm

For high profile I-87K series:

CD:\WinPAC\napdos\io_module\
http://www.icpdas.com/products/PAC/winpac/io_support_list.htm

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4 Wire the I/O channels

All documents include the I/O module specifications, pin assignments and wiring connections.

For example, Pin Assignments and Wiring connections for the I-87054W module are as follows:

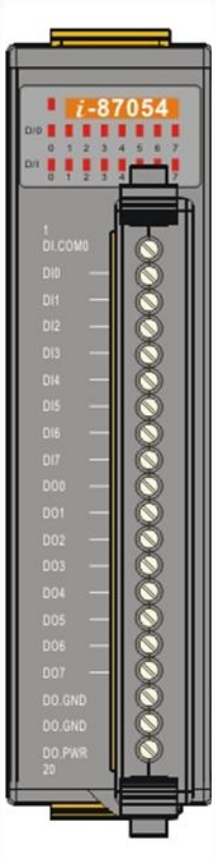

Terminal No.	Pin Assignment Name
01	DI.COM0
02	DI0
03	DI1
04	DI2
05	DI3
06	DI4
07	DI5
08	DI6
09	DI7
10	DO0
11	DO1
12	DO2
13	DO3
14	DO4
15	DO5
16	DO6
17	DO7
18	DO.GND
19	DO.GND
20	DO.PWR

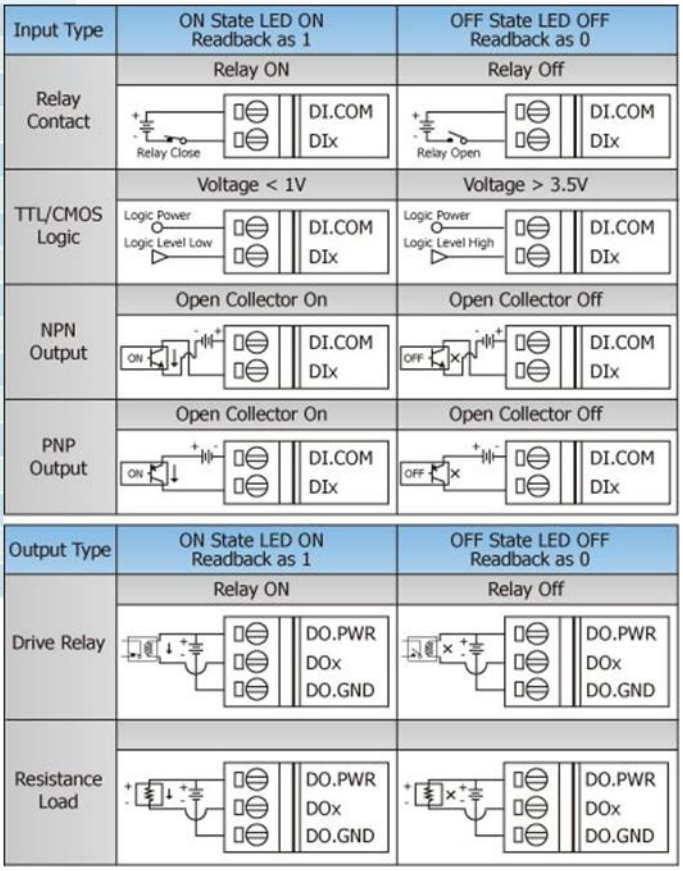

Tips & Warnings

It is recommended that the power to the ViewPAC is switched off when wring the I/O module which are plugging in the ViewPAC slots.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1.4. Mounting the Waterproof

The ViewPAC is equipped with an IP67 waterproof connector to withstand contaminant in dusty environment and immersion in water and corrosive elements.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1.5. Mounting the ViewPAC

The ViewPAC can be mounted on a panel of maximum thickness 12 mm. Adequate access space can be available at the rear of the instrument panel for wiring and servicing purposes.

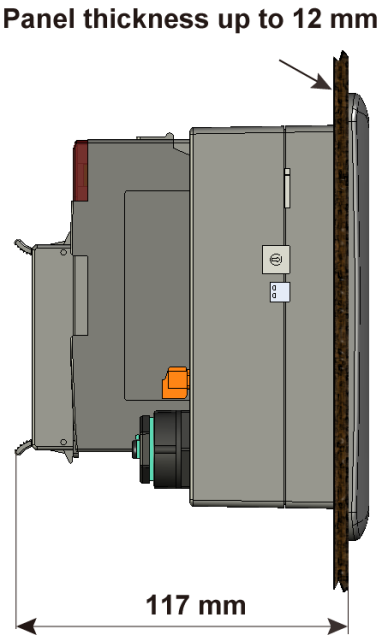

Tips & Warnings

To ensure proper ventilation for your ViewPAC, leave a minimum of 50mm space between the top and bottom edges of the ViewPAC and the enclosure panels.

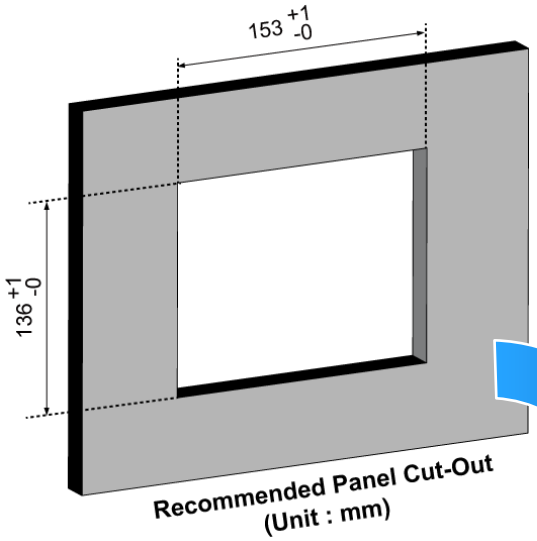

Step 1: Prepare the panel and cut the hole to the specified size

Step 2: Attach the ViewPAC to the cut-out hole

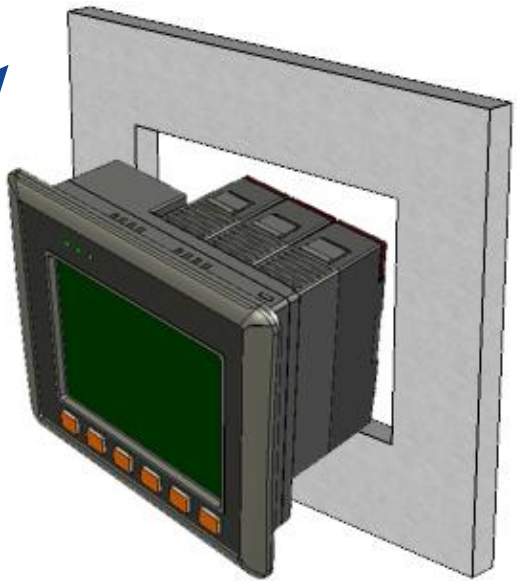

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: Insert the panel mounting clips into the upper and lower ventilation holes

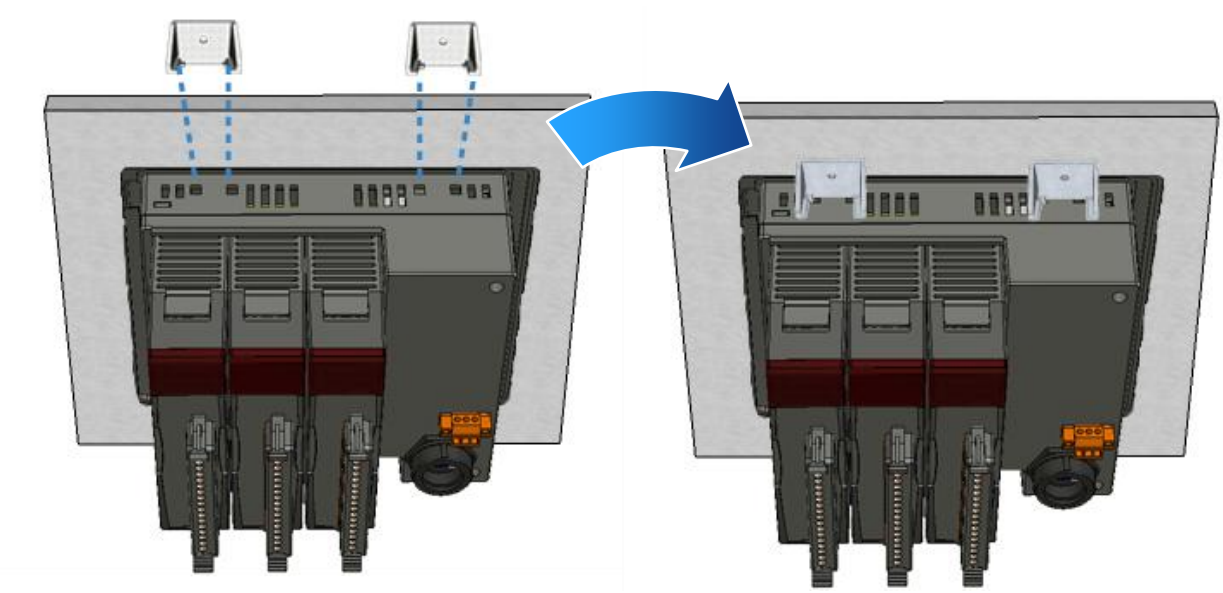

Step 4: Screw the panel mounting clips to the panel

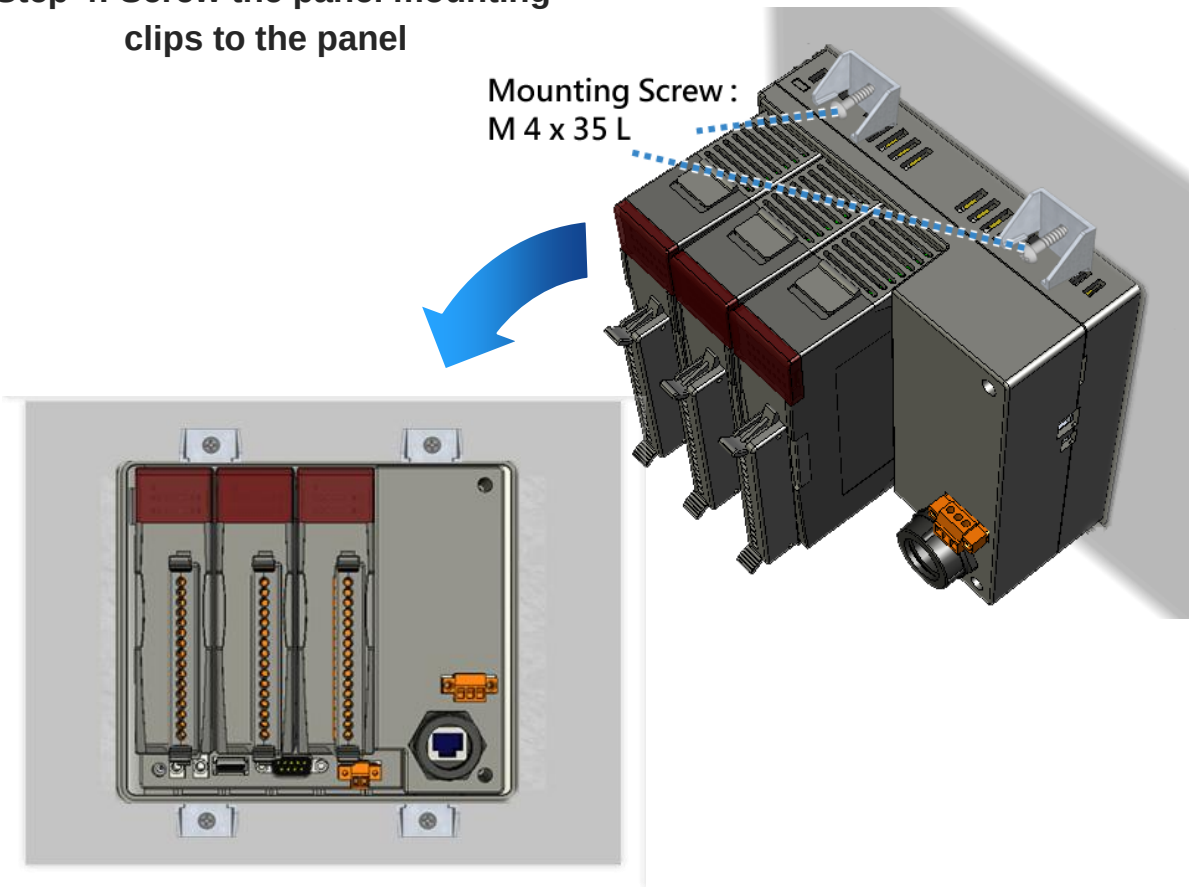

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.1.6. Deploying a Basic ViewPAC Application

The ViewPAC provides a variety of communication interface to suit a range of applications. Here is a simple application for using the ViewPAC that is shown below.

Step 1: Connect the positive terminal (+) of the power supply to the terminal PWR and the negative terminal (-) of the power supply to the P.GND

Tips & Warnings

The input range of power supply is +10 ~ +30 V_{DC}

Step 2: Connect PC to the Ethernet port

Step 3: Connect the USB keyboard to the USB port

Step 4: Connect the audio to the microphone and earphone jack

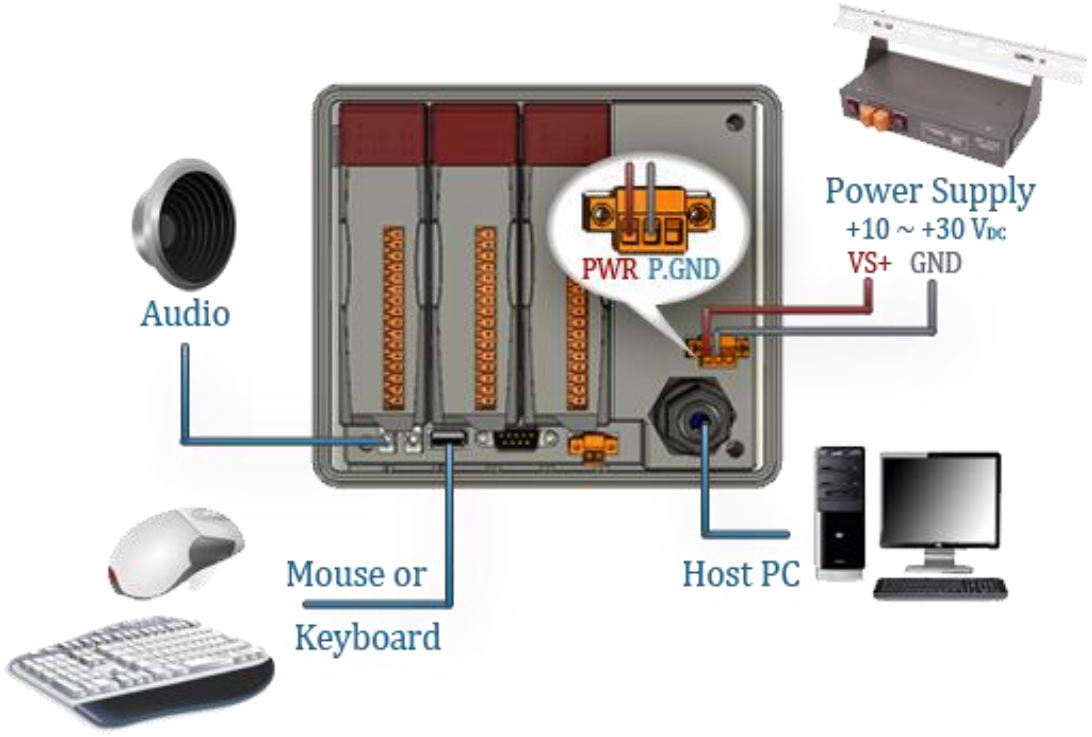

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

2.2. Installing the Tools and Utilities

The ViewPAC has several tools and utility that allows and supports you quickly and easily to manage the XP-8000-Atom-CE6. Here we will introduce two practical of them and guide you through the installation.

Remote Display is one of the Windows CE operating system toolkits. If your ViewPAC is connected to PC through the network, you can use this utility to display the device screen on the host PC and control the ViewPAC remotely through this interface.

For more information on how to use Remote Display to control the ViewPAC remotely, please refer to section 2.6. Using Remote Display to Control the ViewPAC Remotely

DCON Utility is a toolkit that is designed to configure, manage and monitor the I/O modules from PC via COM port or Ethernet.

For more information on how to use DCON Utility to configure the I/O module, please refer to section 2.7. Using DCON Utility to Configure the I/O Module.

Step 1: Get the DCON Utility and Remote Display

The DCON Utility and Remote Display can be installed from the CD that was provided with the package or by downloading the latest version from ICP DAS web site.

CD:\WinPAC\napdos\vp-2000_ce50\PC_Tools\
ftp://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/pc_tools/

Step 2: Follow the prompts until the installation is complete

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.3. Configuring the Boot Mode

The ViewPAC has seven boot modes that can be determined through a rotary switch.

The table below lists the operation mode selection.

Position	Modes of operation
0	Normal mode (Default)
1	Safe mode
2	Debug mode
3	OS update mode
4	Development mode
5	DCON_CE
6	VCEP
7 ~ 9	(For user)

Normal Mode (Default)

Normal mode is the default mode of operation and the one you will use most of the time. Use this mode for more tasks and configurations. Programs also are executed in this mode.

Safe Mode

Safe mode is a troubleshooting option that starts your computer with only basic services and functionality. If an existing problem does not reappear when you start ViewPAC in safe mode, you can eliminate the default settings and basic device drivers as possible causes.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

In normal mode, if the new settings are not saved when you change and save the settings using the ViewPAC Utility, to solve this problem, perform the following steps:

Step 1: Restart the ViewPAC in safe mode

Turn the rotary switch to “1”, and then restart the ViewPAC.

Step 2: Start the ViewPAC Utility to restore the default settings

Start the ViewPAC Utility, and then click the “Restore Default Settings” command and “Save” command from the “File” menu

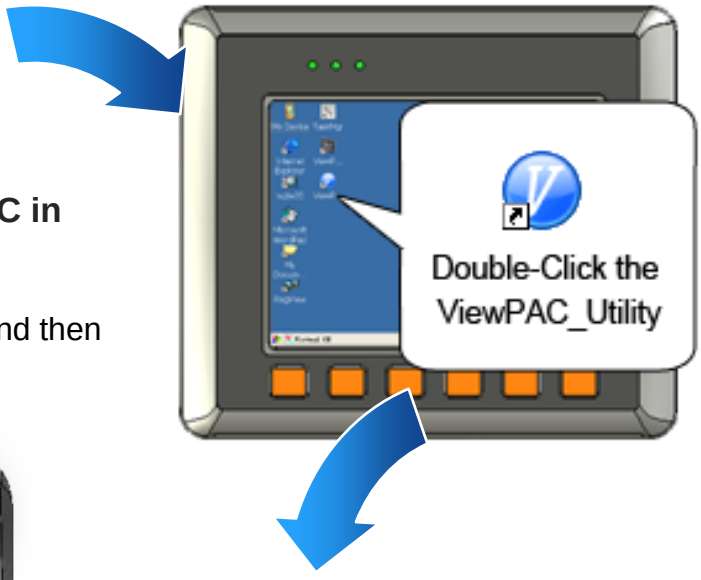

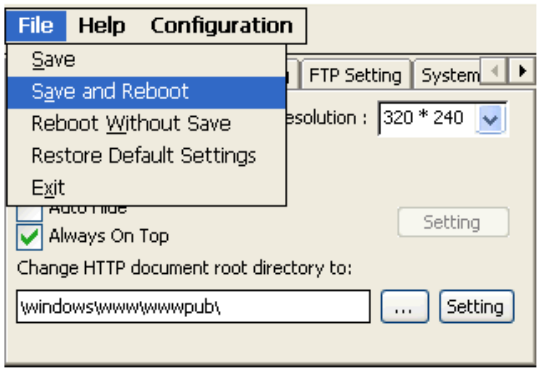

Step 3: Restart the ViewPAC in normal mode

Turn the rotary switch to “0”, and then restart the ViewPAC.

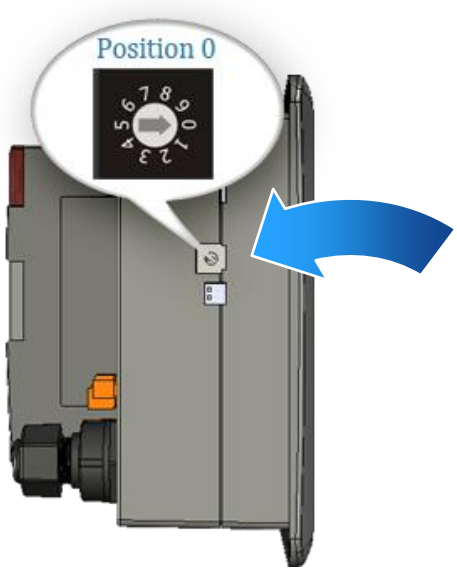

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Debug Mode

The debug mode is a function hidden in a program that provides options used for testing and debugging that are not available to users.

Debug mode is unsupported.

OS Update Mode

OS update mode is a way that is used to update OS. To update the ViewPAC OS image, please refer to “6.1. OS updates”

DCON_CE Mode

This mode is the same as Normal mode. Besides, DCON_CE.exe will be run automatically after booting

Tips & Warnings

DCON_CE.exe must be placed on the \System_Disk\Tools\DCON_CE, or else DCON_CE.exe cannot be run automatically after booting.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

VCEP Mode

This mode is the same as Normal mode. Besides, VCEP.exe will be run automatically after booting.

Tips & Warnings

VCEP.exe must be placed on the \System_Disk\Tools\VCEP or else VCEP.exe cannot be run automatically after booting.

User Mode

Rotary switch position 7, 8, 9 are reserved for user's applications.

When ViewPAC is boot with one of these rotary switch positions, it is boot at normal mode. User's application can check the rotary switch position to run at different mode.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

2.4. Changing the User Interface Language

The "Regional Settings" is a Windows CE functionality that allows users to easily change the ViewPAC user interface to your native language.

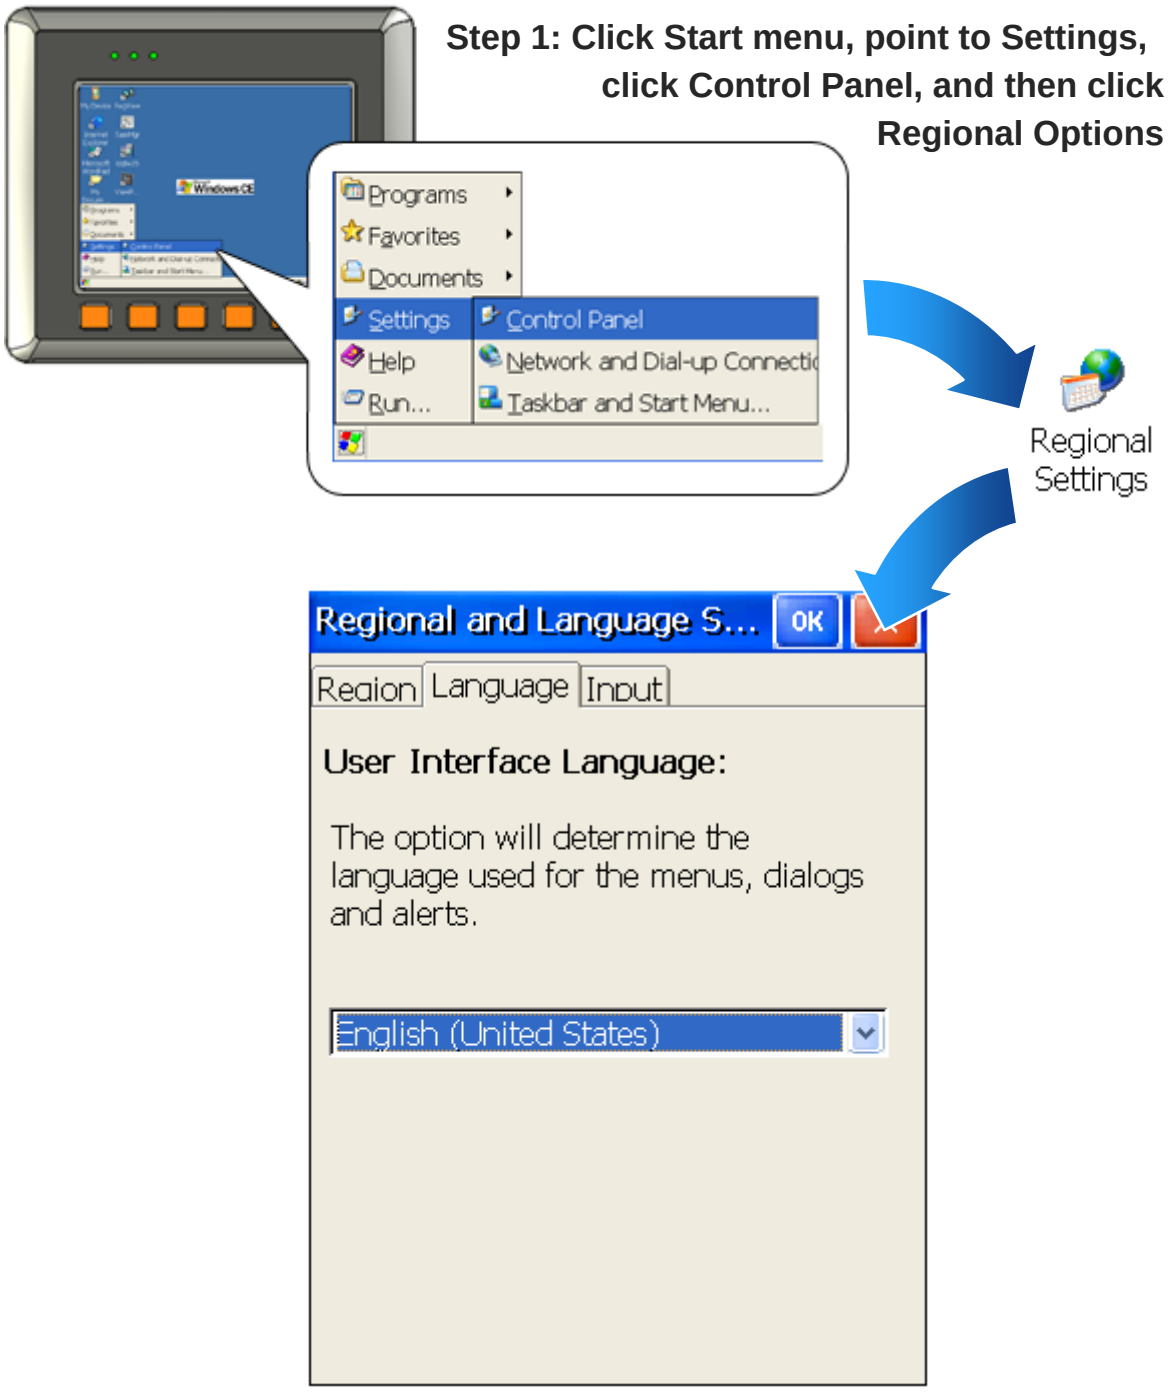

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: Click User Interface Language tab, choose to your local language, and then click OK

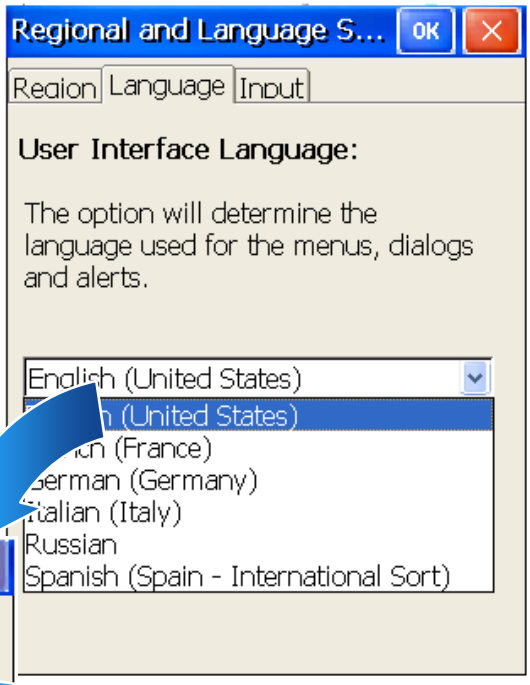

Step 3: Click OK, and then run the ViewPAC Utility

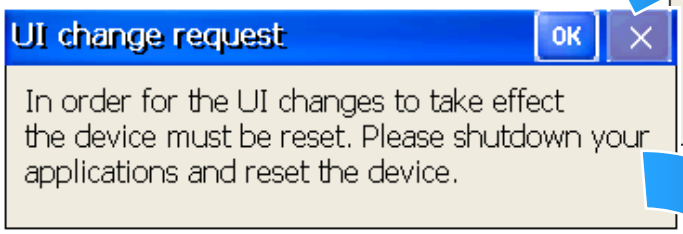
UI change request
OK
In order for the UI changes to take effect the device must be reset. Please shutdown your applications and reset the device.

Step 4: Save and reboot the ViewPAC

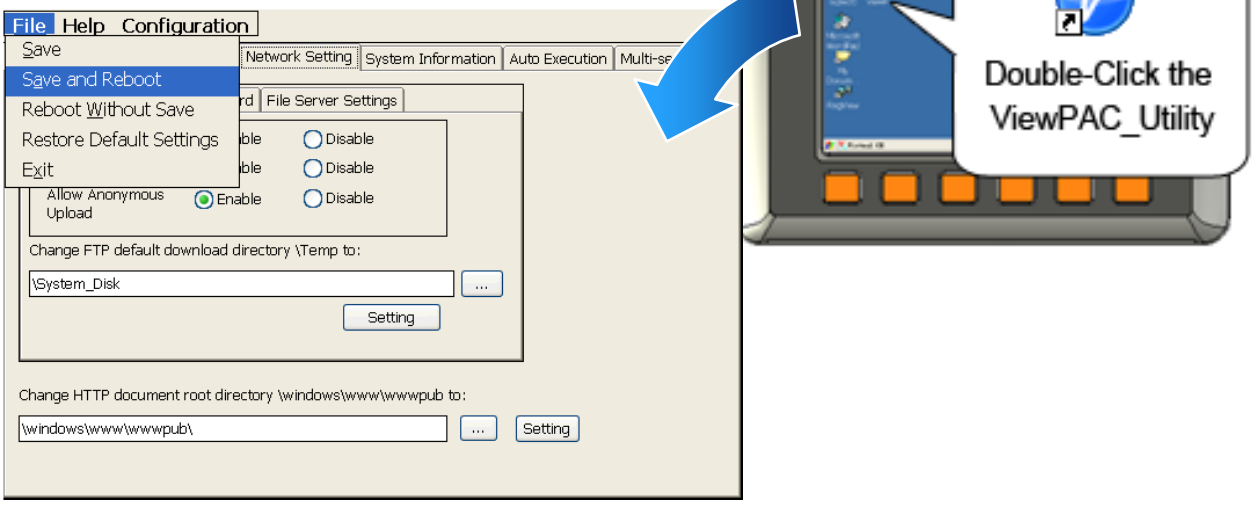

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.5. Testing the ViewPAC

ViewPAC combines WinPAC, graphic display and keypad dial in one unit. The ViewPAC Quick Test is a toolkit used to check out the ViewPAC particular function compared with WinPAC.

VP-23W1:

Audio Options:

Play Audio

Play Audio button is used to check the audio output.

Buzzer Options:

Play Buzzer

Play Buzzer button is used to check the buzzer.

LED Options:

These buttons are used to check LEDs sign.

KeyPAD Option:

Checkboxes are used to check the KeyPAD.

Text field is used to check the input format.

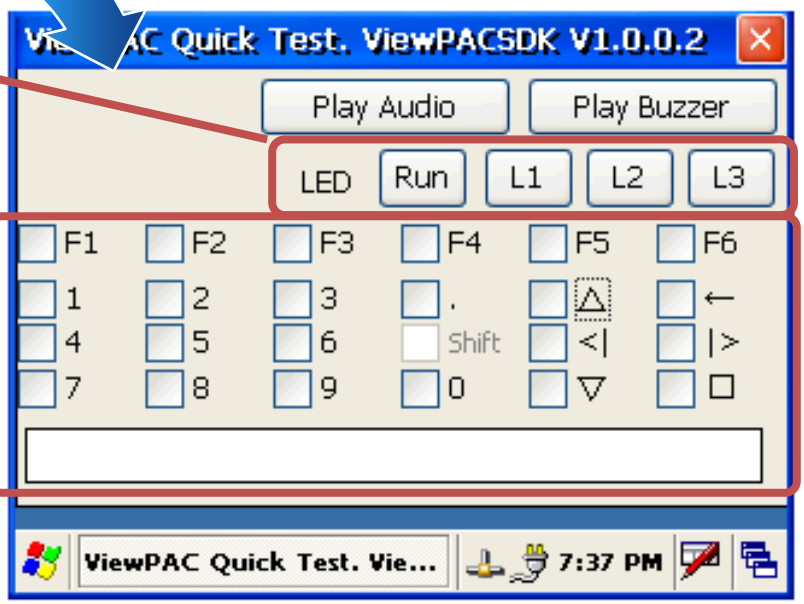

Tips & Warnings

The shift key is a modifier key used to enter alternate upper letters or characters.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

VP-25W1:

Audio Options:

Play Audio

Play Audio button is used to check the audio output.

Buzzer Options:

Play Buzzer

Play Buzzer button is used to check the buzzer.

LED Options:

These buttons are used to check LEDs sign.

KeyPAD Option:

Checkboxes are used to check the KeyPAD.

LCD Backlight Options:

The slider is used to check the LCD Backlight.

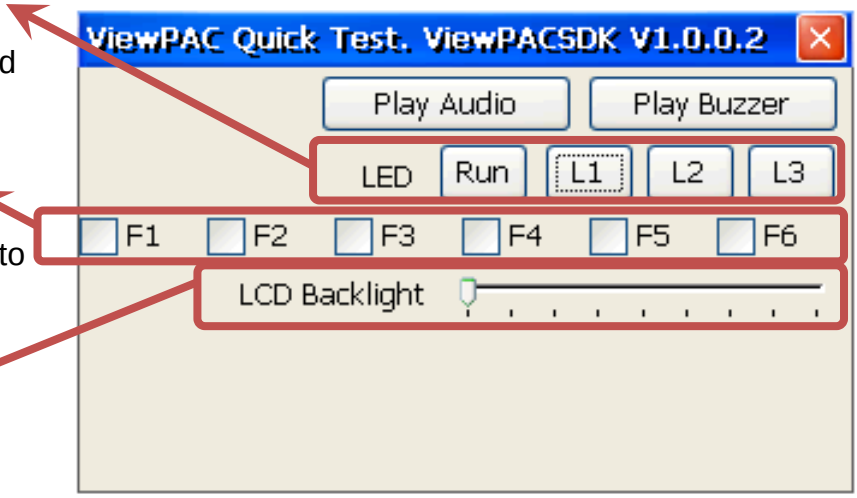

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.6. Using ViewPAC Utility to manage the ViewPAC

The ViewPAC Utility is a collection of the ViewPAC system tool that allows user quickly and easily manage and configure the ViewPAC.

For more detailed information on ViewPAC Utility applications, please refer to “3.5. ViewPAC Utility”

Step 1: Run the ViewPAC Utility located on desktop

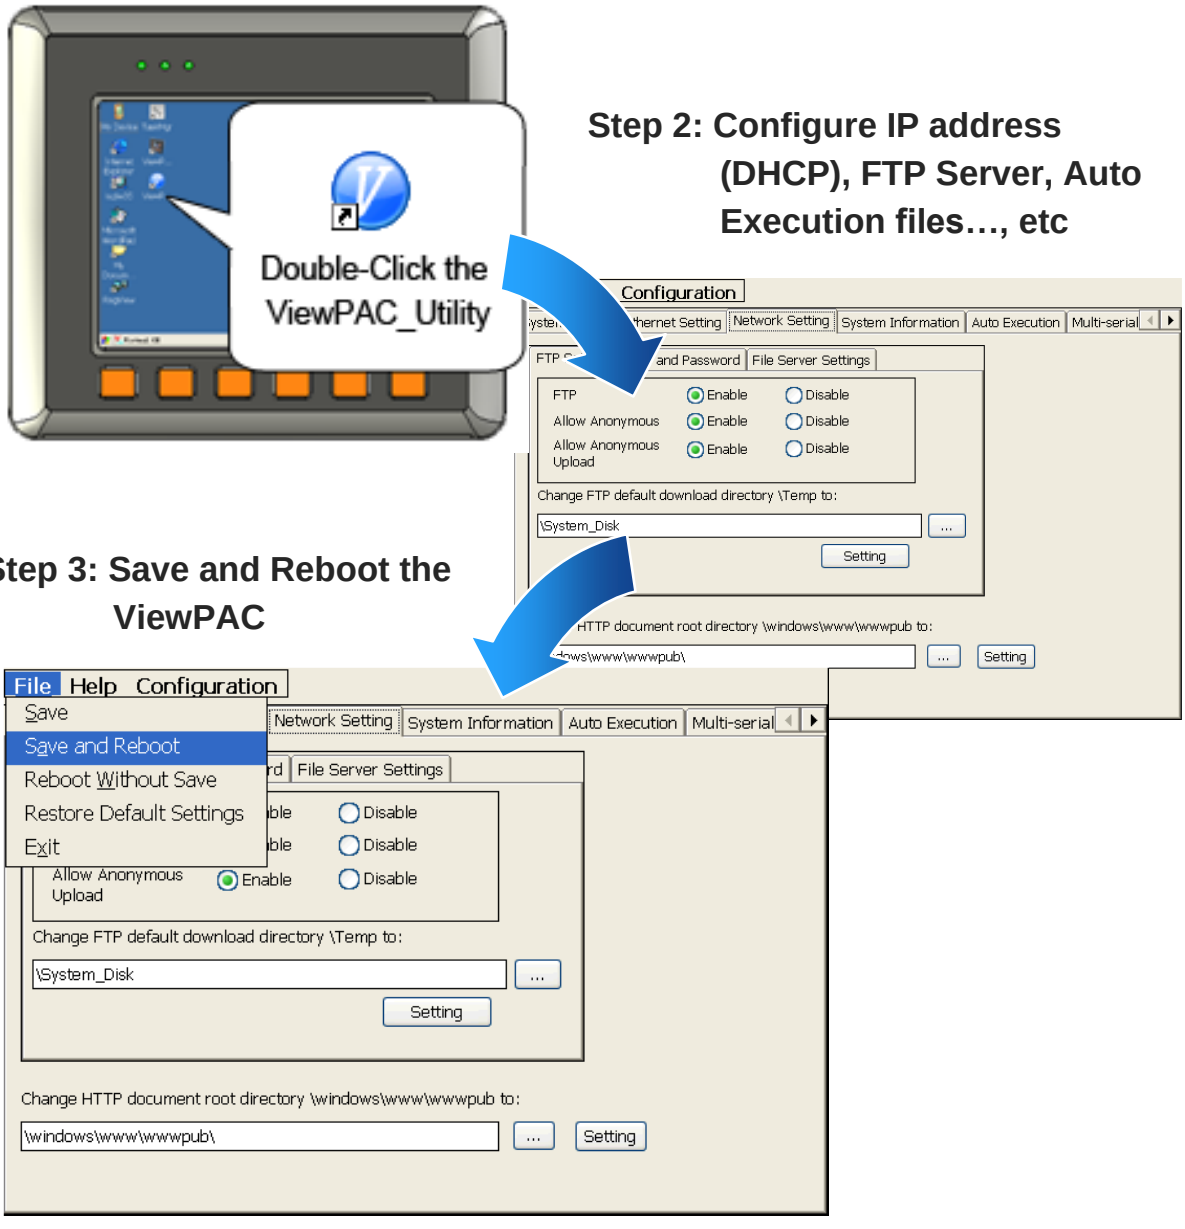

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.7. Using DCON Utility to Configure the I/O Modules

The DCON Utility is a client utility that runs on PC, and communicates with ViewPAC via DCON protocol. The DCON Utility allows users to remotely connect to I-7K and I-87K series I/O modules for management through the COM port and Ethernet port.

This tool is composed of two parts, a client and a server. The server is a program named DCON_CE_WP.exe running on ViewPAC. The client is a PC-based program named DCON_Utility.exe running on PC.

Step 1: Run the DCON firmware on the ViewPAC controller

The DCON firmware is located at:
\System_Disk\Tools\DCON_CE\

Step 2: Run the DCON Utility on the host PC

The DCON Utility can be obtained from:

CD:\WinPAC\napdos\vp-2000_ce50\PC_Tools\DCON_Utility\
http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/pc_tools/dcon_utility/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: Click the WIN CE button

DCON_UTILITY [VER521] select COM Port option then search modules...
File COM Port Search Run Terminal Language Help
Start 0 End 255 (Max Address range: 0~255)
module Address Baudrate: format Status Description
WIN CE
Click the WIN CE button
Searching Status:
COM Port: COM 1 Address 00 [dec] 0 [hex] Baudrate: 9600 Parity: None Data Bit: 8 Stop Bit: 1

Step 4: On the WINCE device connection, enter the IP address of the ViewPAC to search the I-87K series expansion I/O modules

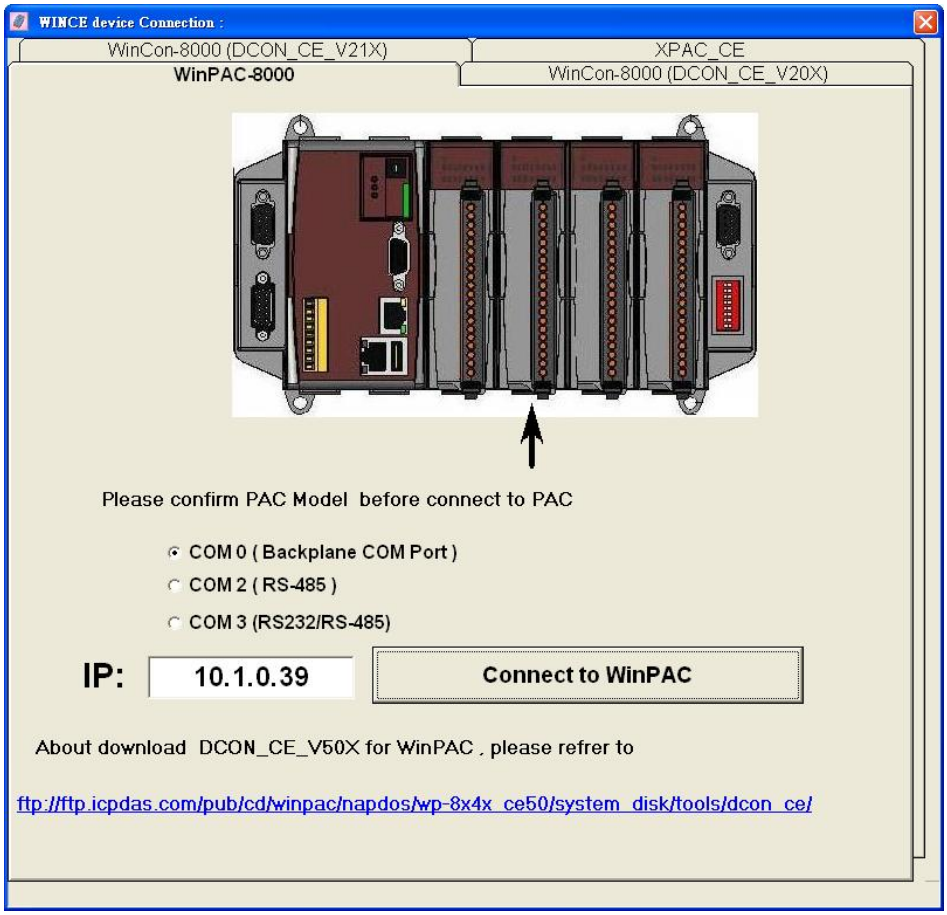

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 5: It will display a list of I-87K series expansion I/O modules, then select the module name that you want to configure

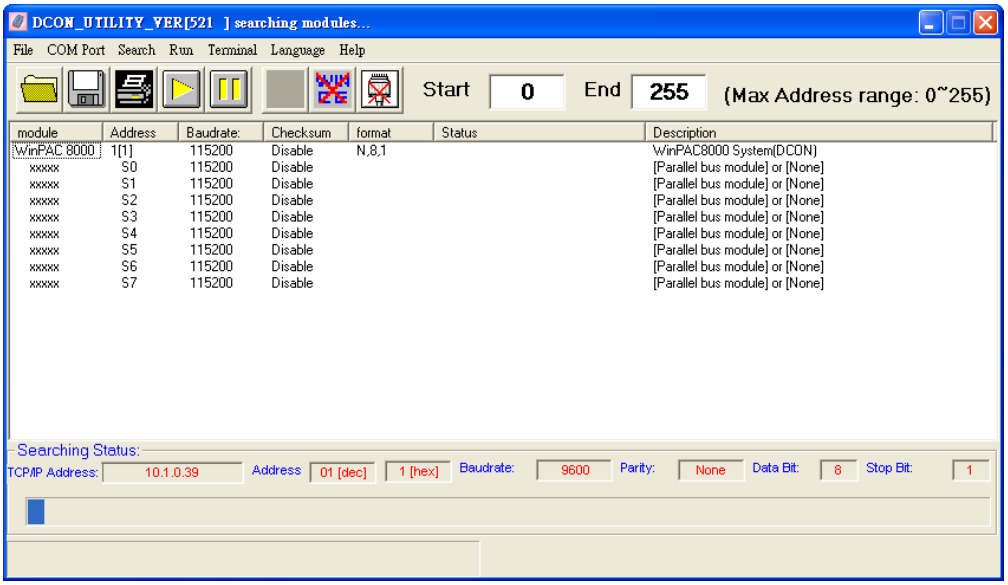
DCON_UTILITY_VER[521] searching modules...
File COM Port Search Run Terminal Language Help
Start 0 End 255 (Max Address range: 0~255)
module Address Baudrate: Checksum format Status Description
WinPAC 8000 1[1] 115200 Disable N,8,1 WinPAC8000 System(DCON)
xxxxx S0 115200 Disable [Parallel bus module] or [None]
xxxxx S1 115200 Disable [Parallel bus module] or [None]
xxxxx S2 115200 Disable [Parallel bus module] or [None]
xxxxx S3 115200 Disable [Parallel bus module] or [None]
xxxxx S4 115200 Disable [Parallel bus module] or [None]
xxxxx S5 115200 Disable [Parallel bus module] or [None]
xxxxx S6 115200 Disable [Parallel bus module] or [None]
xxxxx S7 115200 Disable [Parallel bus module] or [None]
Searching Status:
TCP/IP Address: 10.1.0.39 Address 01 [dec] 1 [hex] Baudrate: 9600 Parity: None Data Bit: 8 Stop Bit: 1

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.8. Using Backup Utility to Backup the settings and files

After saving the configuration settings for a ViewPAC device following the first use, it is recommended to use the Backup utility to back up all the settings and files.

Step 1: Run the Backup Utility on the ViewPAC

The DCON firmware is located at:
\System_Disk\Tools\Backup_utility\

Step 2: Click the Backup menu

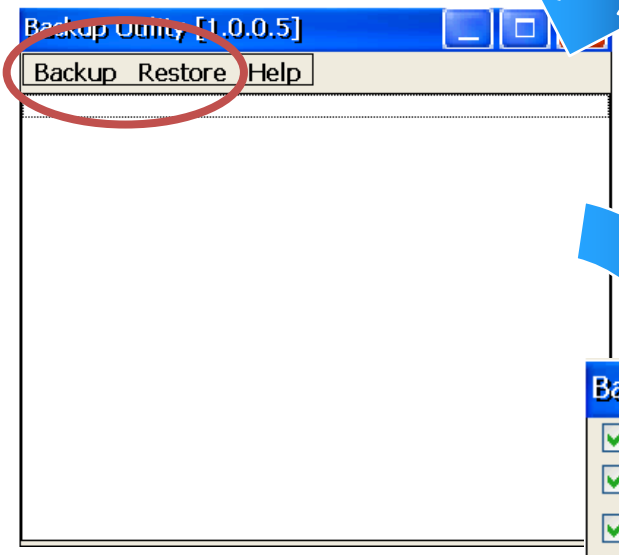

Step 3: Select the options that you want to backup, enter text annotations and then click the Start backup button

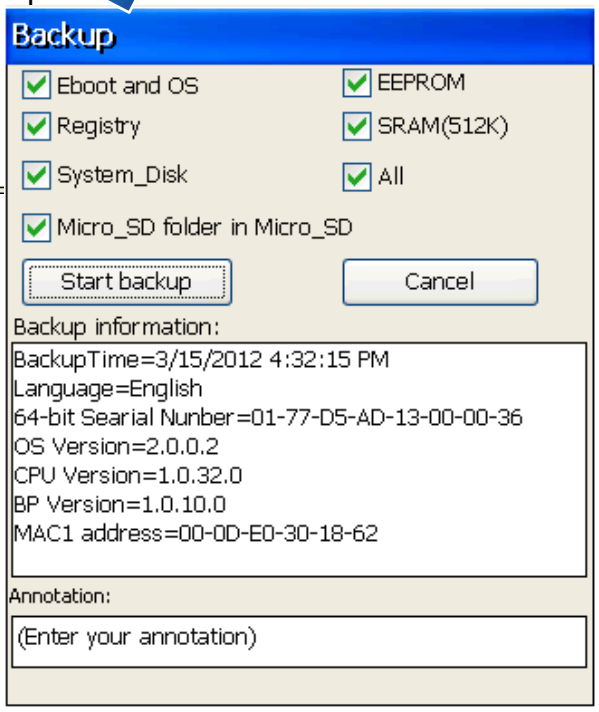

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: Confirm the backup options and then click Yes button

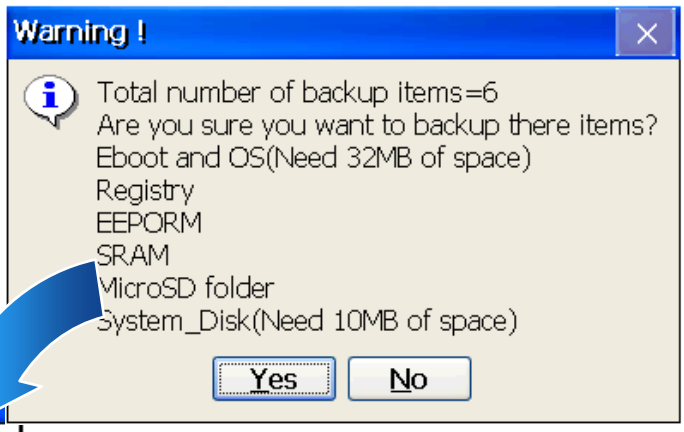

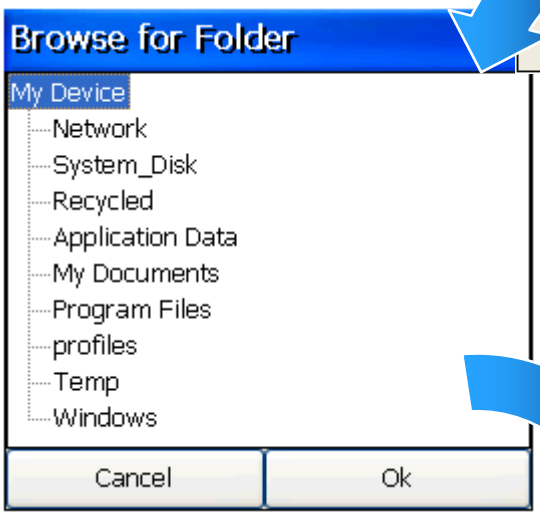

Step 5: Choose the folder that you want to save backup file and click the Ok button

Step 6: Wait for process to finish

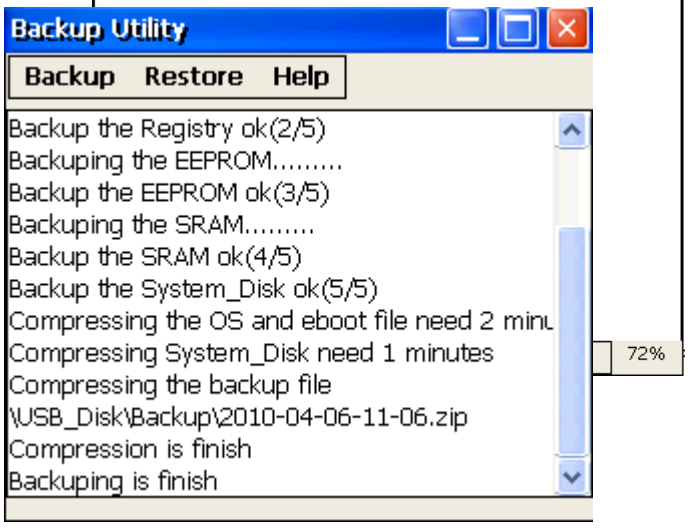

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

2.9. A caution about using System_Disk

The System_disk is an authoritative storage device, but is not suitable for frequent copying and deleting of files and is only suitable for storing important files that are not changed frequently.

If files are copied and deleted frequently, the system will automatically perform a System_Disk defragment action, which will consume the total resources of the CPU and cause the OS not to function correctly.

When the OS System_Disk defragment action is being performed, the run LED will blink and the defragment action icon will show in the system tray in the bottom right-hand of the pc screen.

Tips & Warnings

Don not power off the ViewPAC while the defragment is being performed.

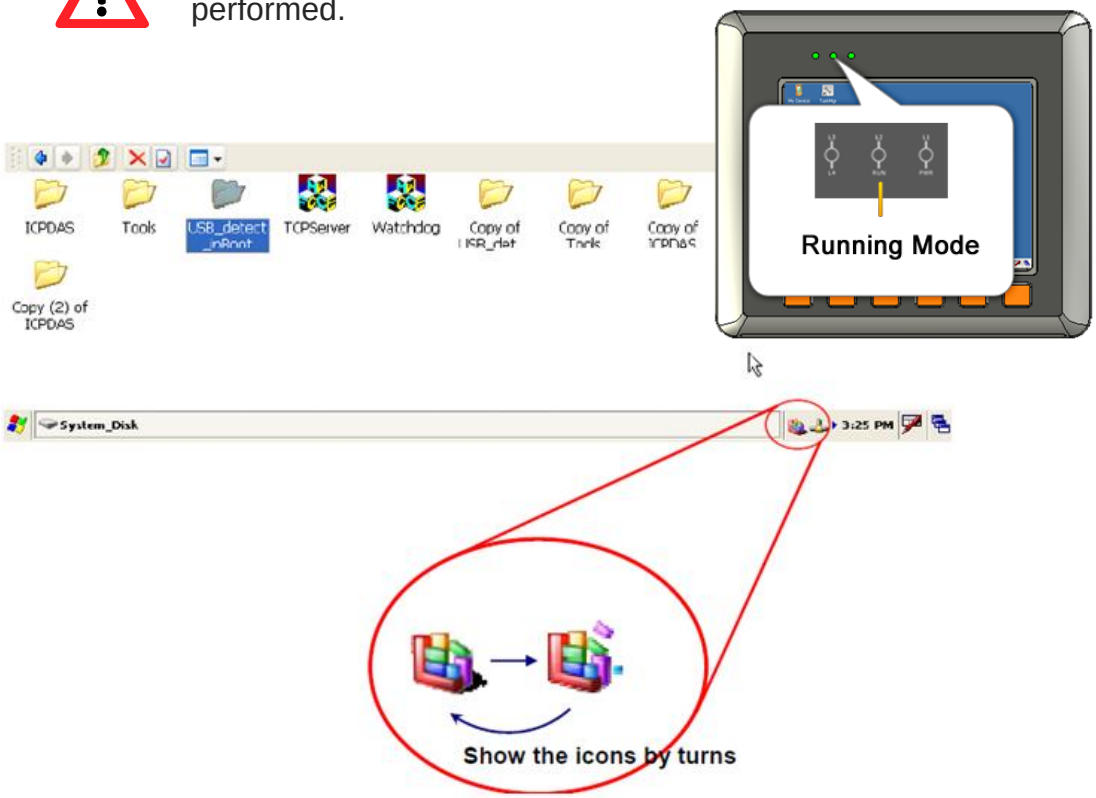

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3. Tools and Tasks

This chapter briefly describes the functions of the ViewPAC tools and utilities.

There are several tools and utilities built-in and designed for use with ViewPAC. Some of these tools and utilities are installed on the ViewPAC controller, some are available on PC.

Both the tools and utilities of the ViewPAC side and PC side tools can be found separately on the CD that was provided with the package or by downloading the latest version from ICP DAS web site.

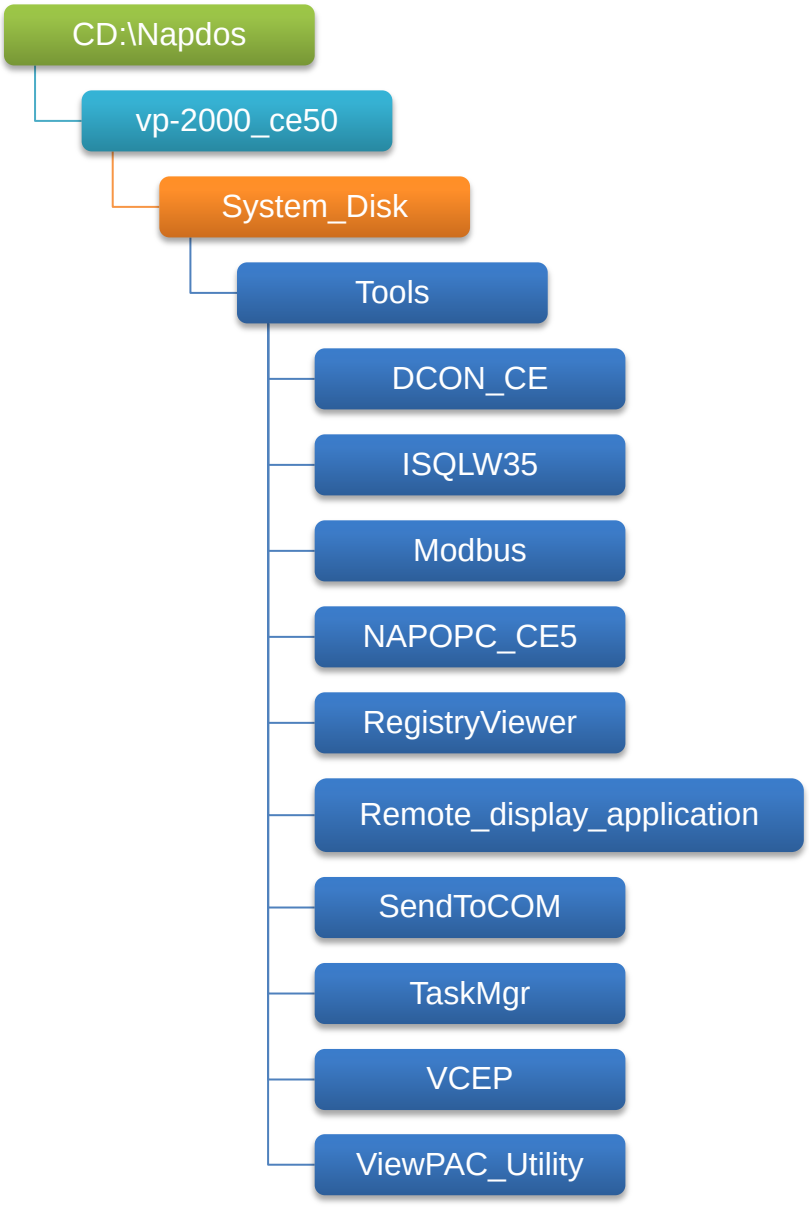

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

• DCON_CE

With Host PC running the DCON Utility, on the ViewPAC, the DCON_CE program allows user to view and monitor the status of the DCON Utility.

• ISQLW35

The ISQLW35 implements SQL server compact 3.5 Query Analyzer.

• Modbus

The Modbus provides various applications of Modbus protocol for configuring the ViewPAC.

• NAPOPC_CE5

NAPOPC_CE5 is an integrated omnibus software package, it allows user to quickly establish a DCS control system.

For more information about the NAPOPC_CE5, please refer to “3.2. NAPOPC_CE5”.

• RegistryViewer

The Registry Viewer allows user to view the registry value of Windows CE Operating System.

• Remote display application

The remote display application allows user to view the display remotely of the ViewPAC on a Host PC.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

• SendToCOM

The SendToCOM allows user to send/receive data to/from the expansion module via serial port.

• TaskMgr

The TaskMgr provides details about programs and processes running on the ViewPAC.

• VCEP

The VCEP allows user to manage the ViewPAC remotely on a Host PC.

For more information about the VCEP, please refer to “3.4. VCEP (Virtual CE Pro)”.

• ViewPAC Utility

The ViewPAC Utility provides various useful functions such as configuring Ethernet settings, monitoring system settings and FTP services .etc for easy and quick management.

For more information about the ViewPAC Utility, please refer to “3.5. ViewPAC Utility”.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.1. DCON Utility

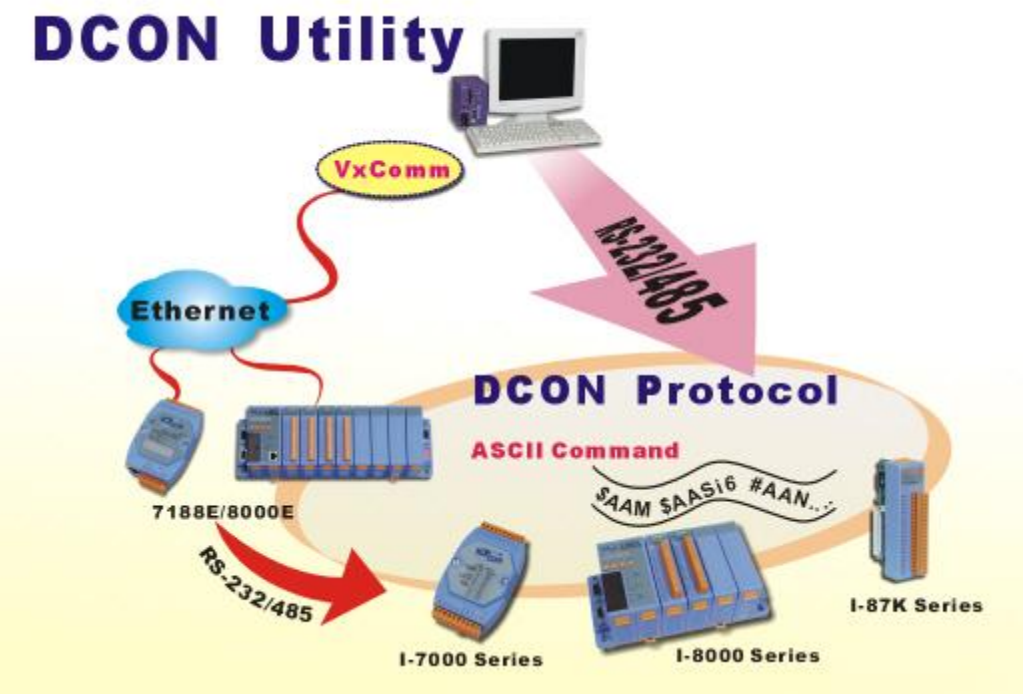

The DCON Utility is a tool kit that help user search the network, easily to Configure the I/O modules and test the I/O status via the serial port (RS-232/485) or Ethernet port (using virtual com port). It supports not only the DCON Protocol I/O modules but also the M Series I/O Modules (Modbus RTU M-7K, M-87K and will support Modbus ASCII M-87K) now.

For more detailed information on ViewPAC Utility applications, please refer to

“2.9. Using DCON Utility to configure the I/O modules”

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.2. NAPOPC_CE5

NAPOPC_CE5 DA Server is a free OPC DA Server (The "OPC" stands for "OLE for Process Control" and the "DA" stands for " Data Access") working on WinPAC, ViewPAC & WinCon controllers provided by ICP DAS Ltd. The first standard (originally called simply the OPC Specification and now called the Data Access Specification) resulted from the collaboration of a number of leading worldwide automation suppliers working in cooperation with Microsoft. Originally based on Microsoft's OLE COM (component object model) and DCOM (distributed component object model) technologies, the specification defined a standard set of objects, interfaces and methods for use in process control and manufacturing automation applications to facilitate interoperability. NAPOPC_CE5 DA Server integrates OPC, Modbus TCP Slave and Modbus RTU Slave three kind Slave services, as well as integrates Modbus TCP Master, Modbus RTU Master and DCON three kind Master communication protocols. It also provides one advanced function “Rule Script” for use in the I/O integration and transformation, and some conditional Logic operation.

Any version before 2.1.0 of the NAPOPC_CE5 was named “Quicker”

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.3. SendToCOM

The SendToCOM uses the serial port to communicate with expansion module. To use the SendToCOM, you can send data to expansion module through the serial port, and receive data from other device through the serial port.

For more information about these commands for communicating with expansion module, please refer to:

CD:\Napdos\io_module\87k_high_profile_modules.htm

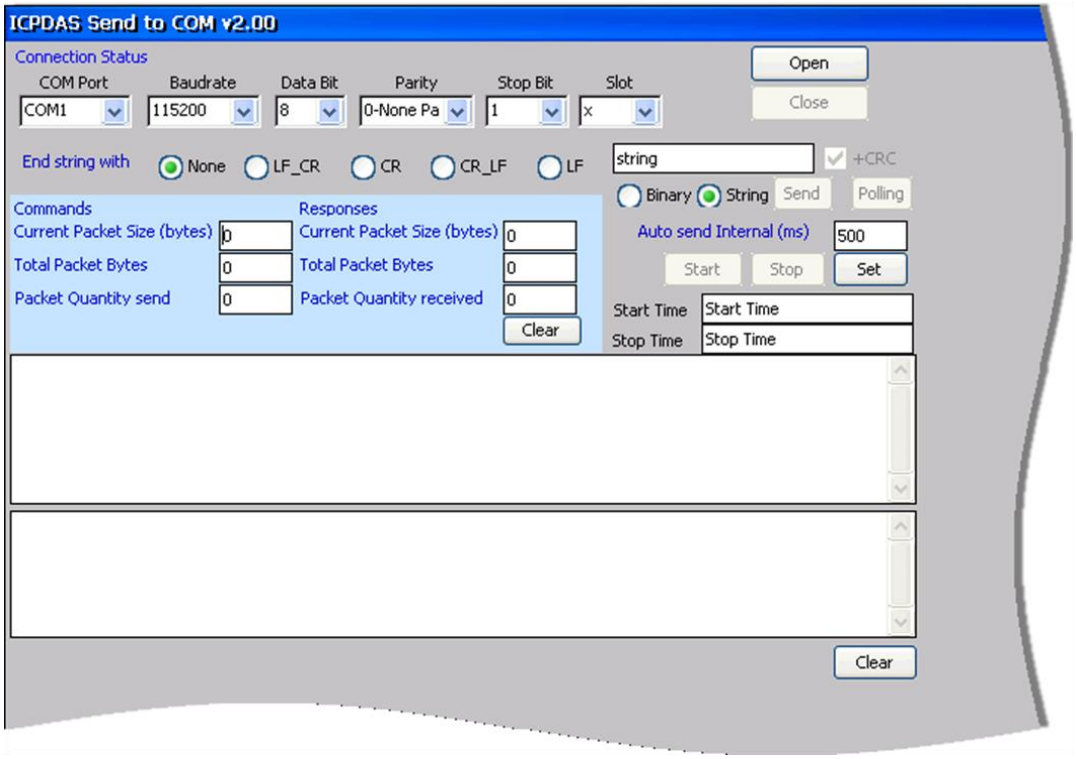

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.4. VCEP

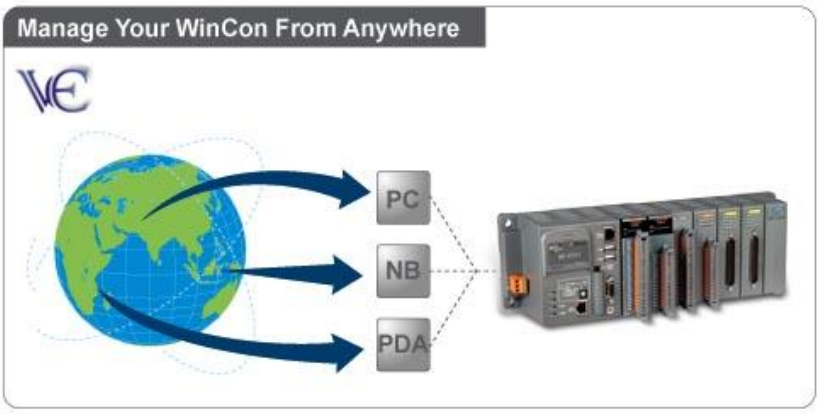

ICPDAS VCEP is designed for managing your ViewPAC anywhere. No matter where you are, ICPDAS VCEP provides a convenient environment on the Desktop PC and allows you control your ViewPAC remotely.

ICPDAS VCEP is composed of two main components:

The “Server” which runs on ViewPAC.
The “Client" which runs on a Desktop PC.

Once a connection is established between the client and server (initiated by the client), the client will periodically send requests for screen updates and send mouse/key click information to the server to simulate. Each video frame is inter-compressed against the previous frame and then intra-compressed with a modified LZW scheme to minimize the amount of data transmitted from server to client.

For more detailed information on VCEP application, please refer to
http://www.icpdas.com/products/PAC/wincon-8000/wincon_VirtualCE.htm

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.5. ViewPAC Utility

The ViewPAC Utility is a tool which is designed to quickly control and management the ViewPAC.

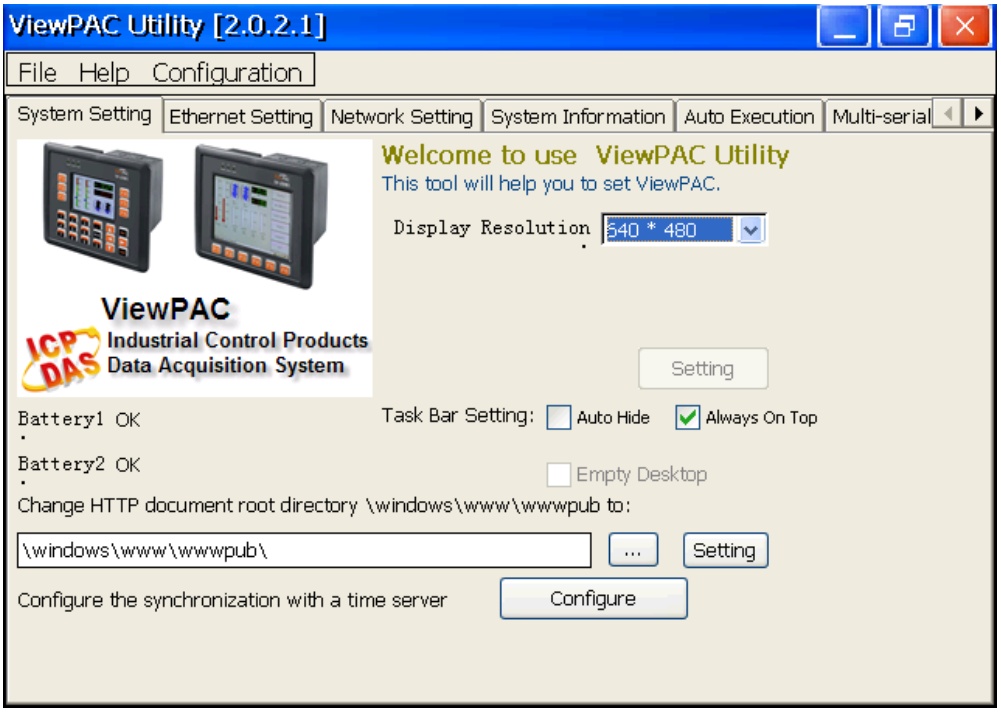

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.5.1. Menu Bar

The ViewPAC Utility includes the following function menu. All function menus will be explained later.

✓ File Menu

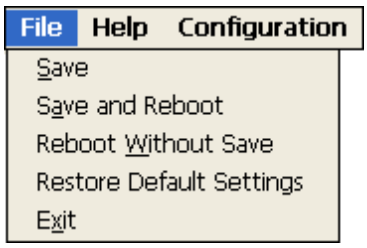

✓ Help Menu

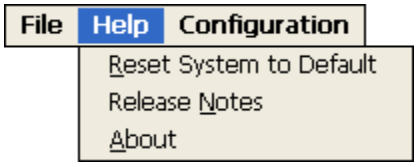

✓ Configuration Menu

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

File Menu

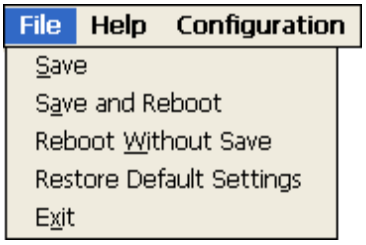

The menu commands	Use to
Save	Saves the settings into Flash. The new settings don't take effect until the ViewPAC restart.
Save and Reboot	Saves the settings into Flash and restart the ViewPAC. The new settings will take effect after the ViewPAC restart.
Reboot Without Save	Restarts the ViewPAC without save the settings into Flash.
Restore Default Settings	Restarts the settings of ViewPAC to its factory default values. The settings include configuration setting, network setting, auto execution, etc.
Exit	Exits the ViewPAC Utility.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Help Menu

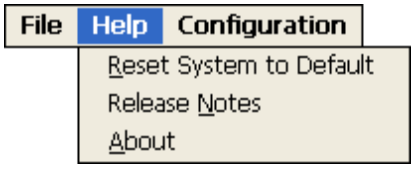

The menu commands	Use to
Reset System to Default	Resets the system interrupt status to default. The operation used in the situation when the interrupt crash. You can select this operation to reset the interrupt status without rebooting the device.
Release Notes	Checks out what's new and the know issues.
About	Displays a dialog box with information about ViewPAC Utility, including the current version and copyright information.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

Configuration Menu

The menu commands	Use to
Import Registry Key	Backs up a sub-key of registry by using a registration entry (.reg) file. How to use: Step 1: Select the “Import Registry Key”, then the “Open” dialog box will appear Step 2: On the “Open” dialog box, select a specific .reg file to import Warning: 1. The .reg file which should be saved by “Export Registry Key”. 2. It will not save automatically after import a .reg file.
Export Registry Key	Makes a back up of a registry sub-key How to use: Step 1: Select the “Export Registry Key”, then the “Export Registry” box will appear Step 2: Select a specific root key Step 3: Input a specific path of sub-key Step 4: Push the “OK” button, then the “Save As” dialog box will appear prompting you to select a location where you want to save this exported file Warning: The export operation will export all the sub-keys of the specific key which you input.
Store All Registry	Stores all registry setting to flash from .das file which

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The menu commands	Use to
Setting	is saved by “Dump All Registry Setting”. How to use: Step 1: Select the “Store All Registry Setting” , then the “Open” dialog box will appear Step 2: On the “Open” dialog box, select a specific .das file to store Warning: 1. The .das file which should be saved by “Dump All Registry Setting”. 2. It will save automatically after store .das file.
Dump All Registry Settings	Dump all registries setting to .das file. How to use: Select the “Dump All Registry Setting”, then the “Save As” dialog box will appear prompting you to select a location where you want to save this exported file.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

3.5.2. Property Tabs

The ViewPAC Utility includes the following property tabs, all property tabs will be explained later.

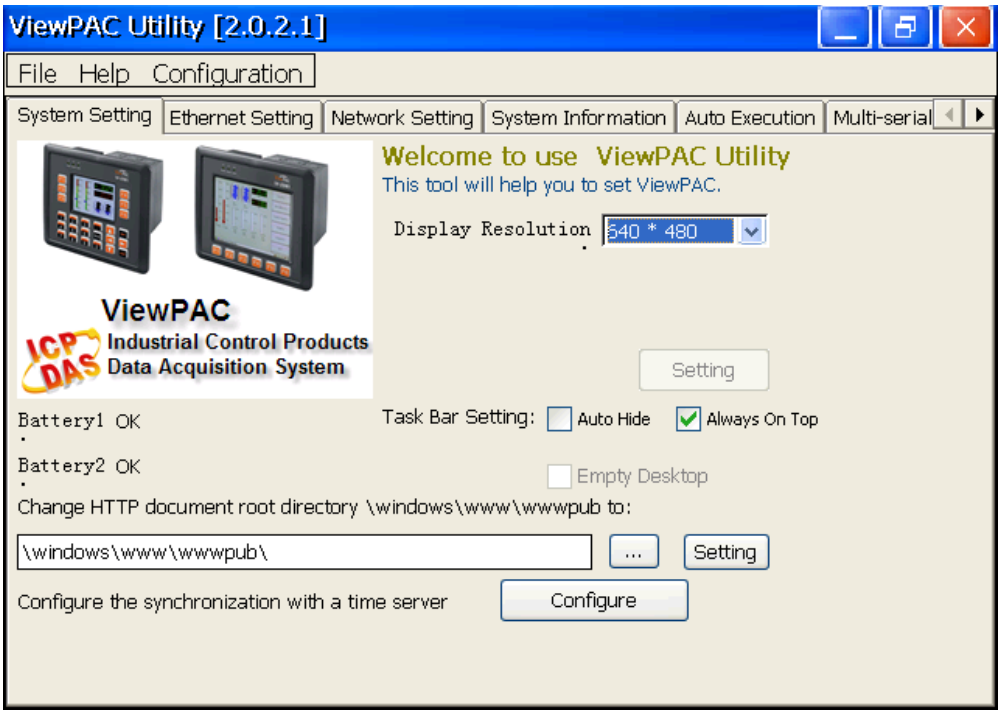

- ✓ **System Setting**
- ✓ **Ethernet Setting**
- ✓ **Network Setting**
- ✓ **System Information**
- ✓ **Auto Execution**
- ✓ **Multi-serial port wizard**
- ✓ **System Memory Setting**
- ✓ **Backplane Compatibility**

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

System Setting Tab

The System tab provides functions to configure the task bar HTTP directory path.

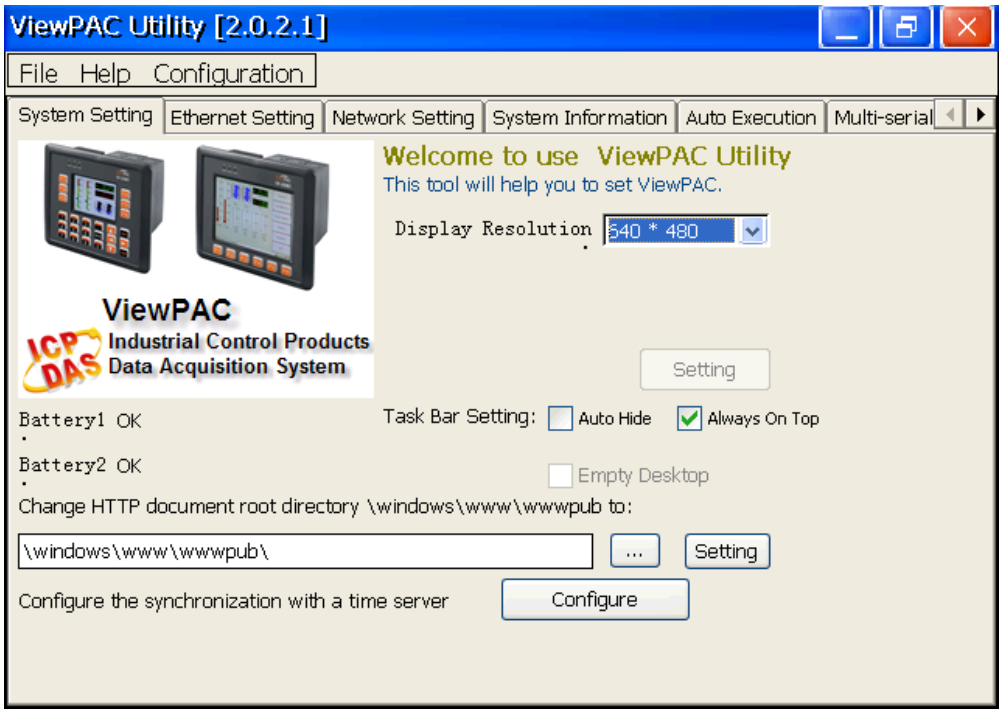

The tab use to	How to use
Adjust the size of the desktop	Select a display resolution from the Resolution list.
Lock or Auto-Hide the taskbar	Auto-Hide: Select the **Auto Hide** check box Lock: Select the **Always On Top** check box.
Check the status of the battery	See the **Battery1** and **Battery2** field that displays the battery status.
Change the HTTP directory path	Enter a new path in the C**hange HTTP document root directory \windows\www\wwwsub to** field, and then press the **Setting** button.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Ethernet Setting Tab

The Ethernet Setting tab provides functions to configure either DHCP (Roaming) or manually configured (Static) network settings and to monitor the MAC address. Generally, DHCP is the default settings, but if you don't have a DHCP server, you must configure the network settings by using manual configuration.

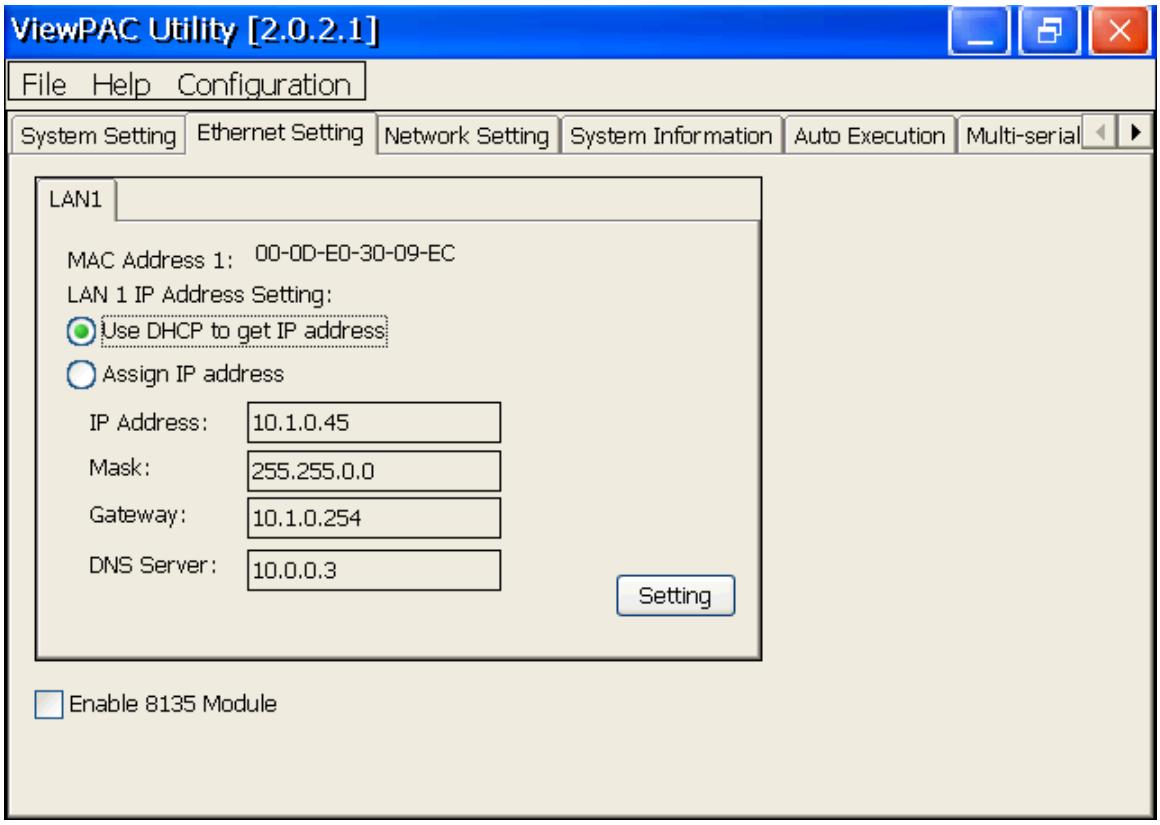

The tab use to	How to use
Configure the network settings	Obtaining an IP address automatically from DHCP: Select the **Use DHCP to get IP address** option, and then press the **Setting** button. Manually assign an IP address: Select the **Assign IP address** option, and then press the **Setting** button.
Monitor the MAC address	See the **MAC Address 1** fields that display the physical address of LAN1.
Set up the i-8135 Ethernet module driver	See the next page.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

8135 tab

This tab provides functions to set up the i-8135 Ethernet module driver.

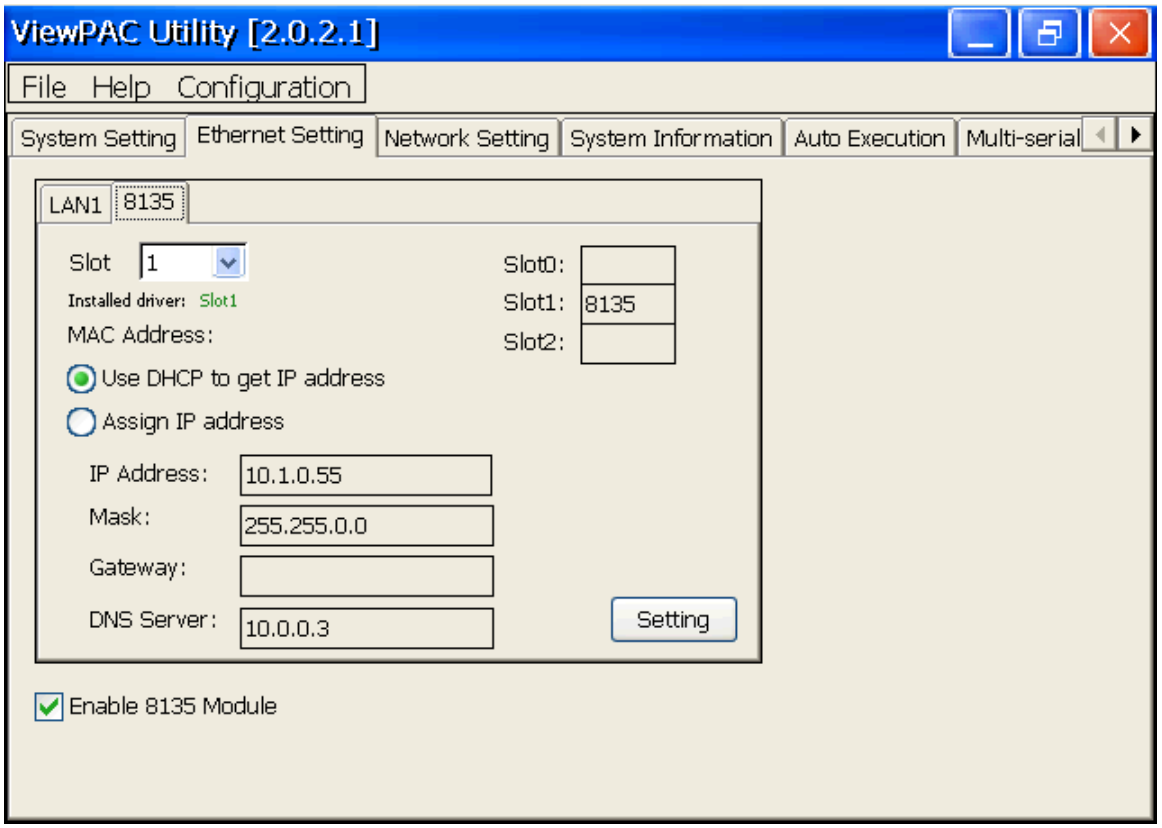

The tab use to	How to use
Set up the i-8135 network settings	Obtaining an IP address automatically from DHCP: Select the **Use DHCP to get IP address** option, and then press the **Setting** button. Manually assign an IP address: Select the **Assign IP address** option, and then press the **Setting** button.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Network Setting Tab

The Network tab consists of two tabs, Access and Login, which provides functions to enable/disable the FTP access, enable/disable anonymous FTP access, configure the FTP directory path, change HTTP document root directory and maintain the FTP accounts.

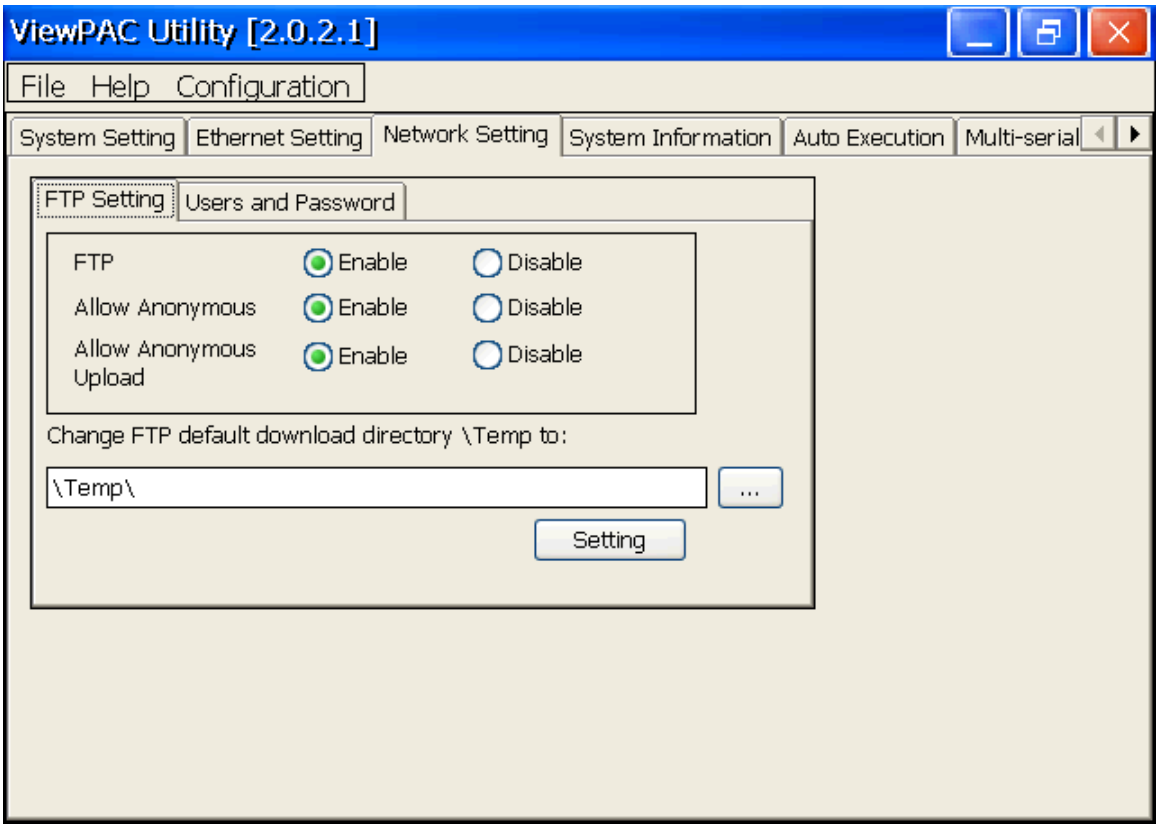

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

FTP Settings tab

This tab provides functions to enable/disable the FTP access, enable/disable anonymous FTP access, and configure the FTP directory path.

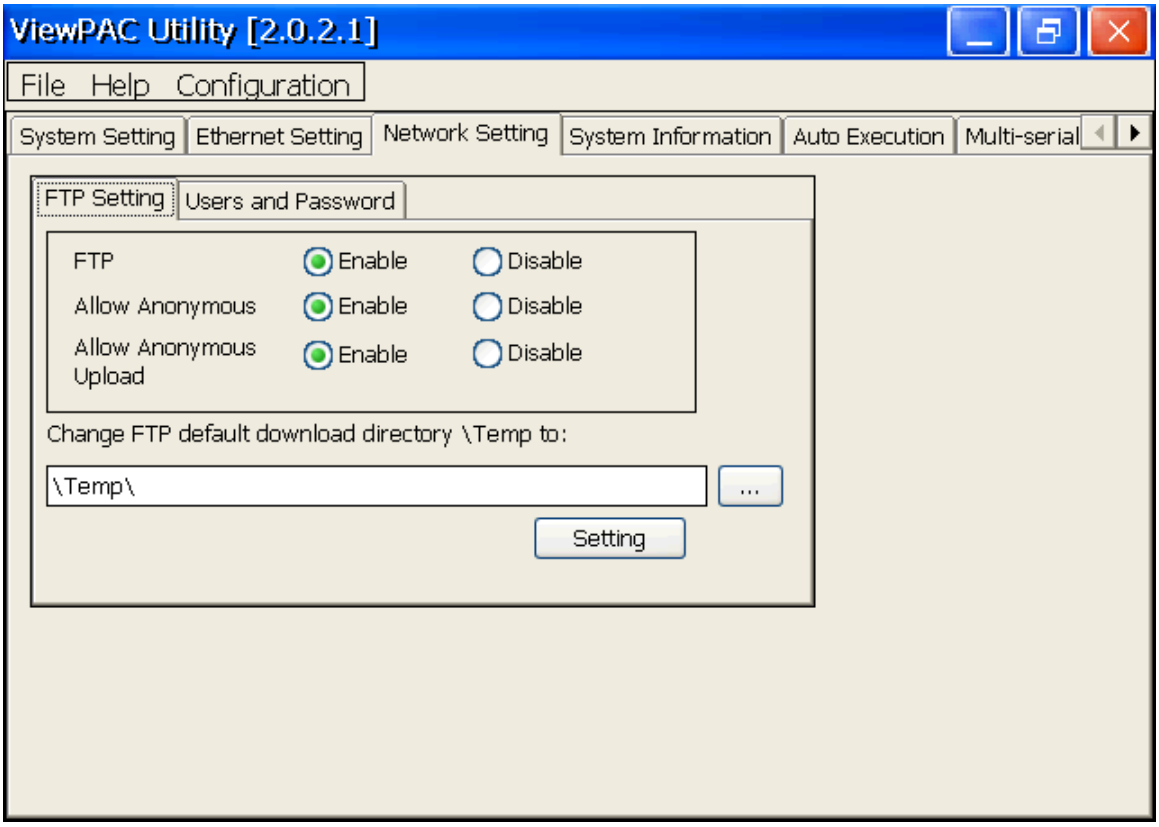

The tab use to	How to use
Enable or disable the FTP access	Enable: Select the Enable check box in the FTP field. Disable: Select the Disable check box in the FTP field.
Enable or disable anonymous FTP access	Enable: Select the Enable check box in the Allow Anonymous field. Disable: Select the Disable check box in the Allow Anonymous field.
Enable or disable anonymous FTP upload	Enable: Select the Enable check box in the Allow Anonymous Upload field. Disable: Select the Disable check box in the Allow Anonymous Upload field.
Change the FTP directory path	Enter a new path in the Change FTP default download directory field, and then press the Setting button.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Users and Password tab

This tab provides functions to maintain the FTP accounts.

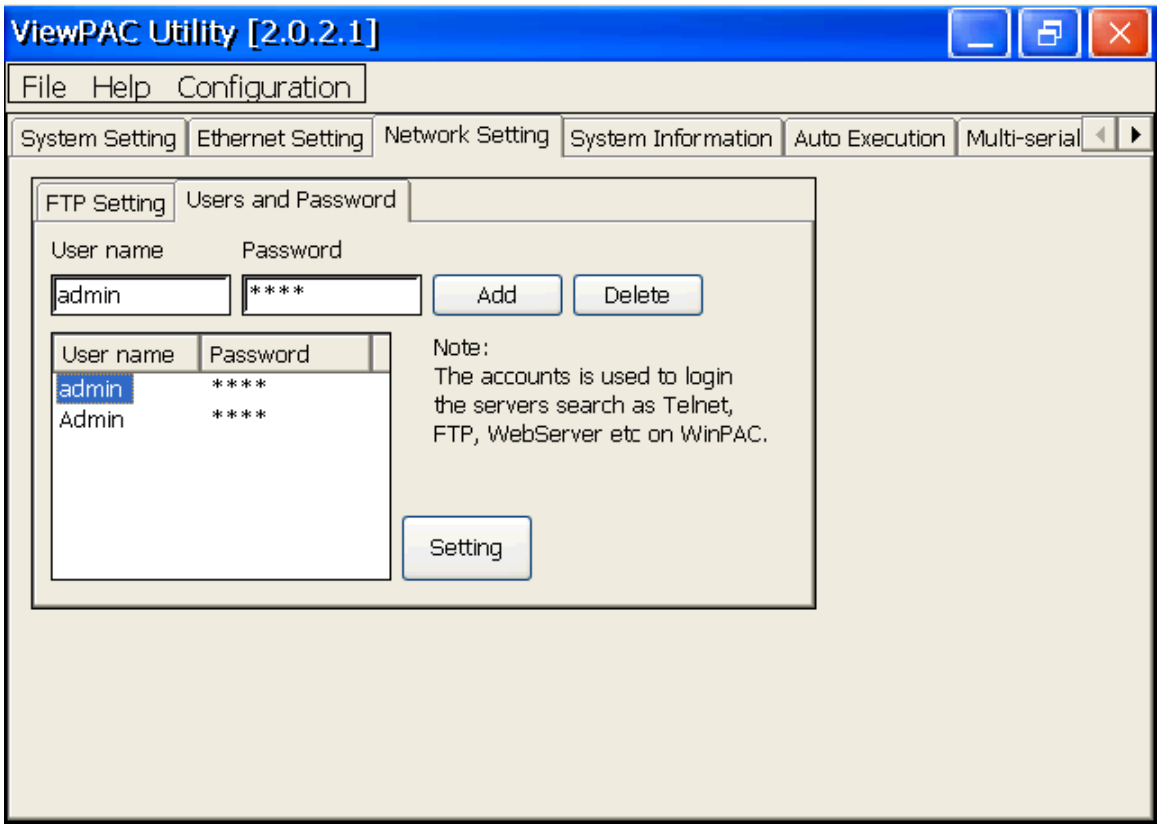

The tab use to	How to use
Maintain the FTP accounts	Refer to the Appendix C.1 How to add a user account to remote login the ViewPAC from PC.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

System Information Tab

The System Information tab provides functions to monitor necessary system information of the ViewPAC-8000. The system information is the most important note of version control for upgrading system.

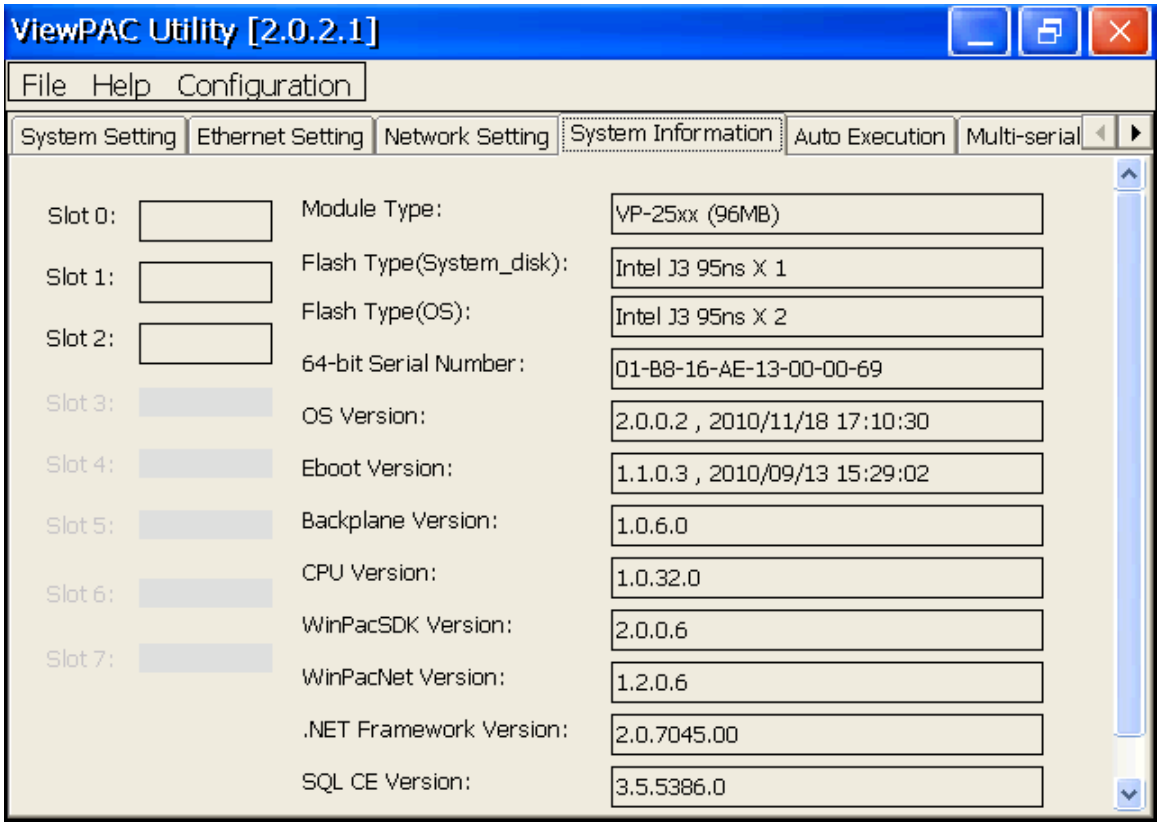

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Auto Execution Tab

The Auto Execute tab provides functions to configure programs running at ViewPAC-8000 startup, it allows users to configure ten execute files at most.

Tips & Warnings

The allowed file types are .exe and .bat, and they are executed in order of program 1, program 2, etc.

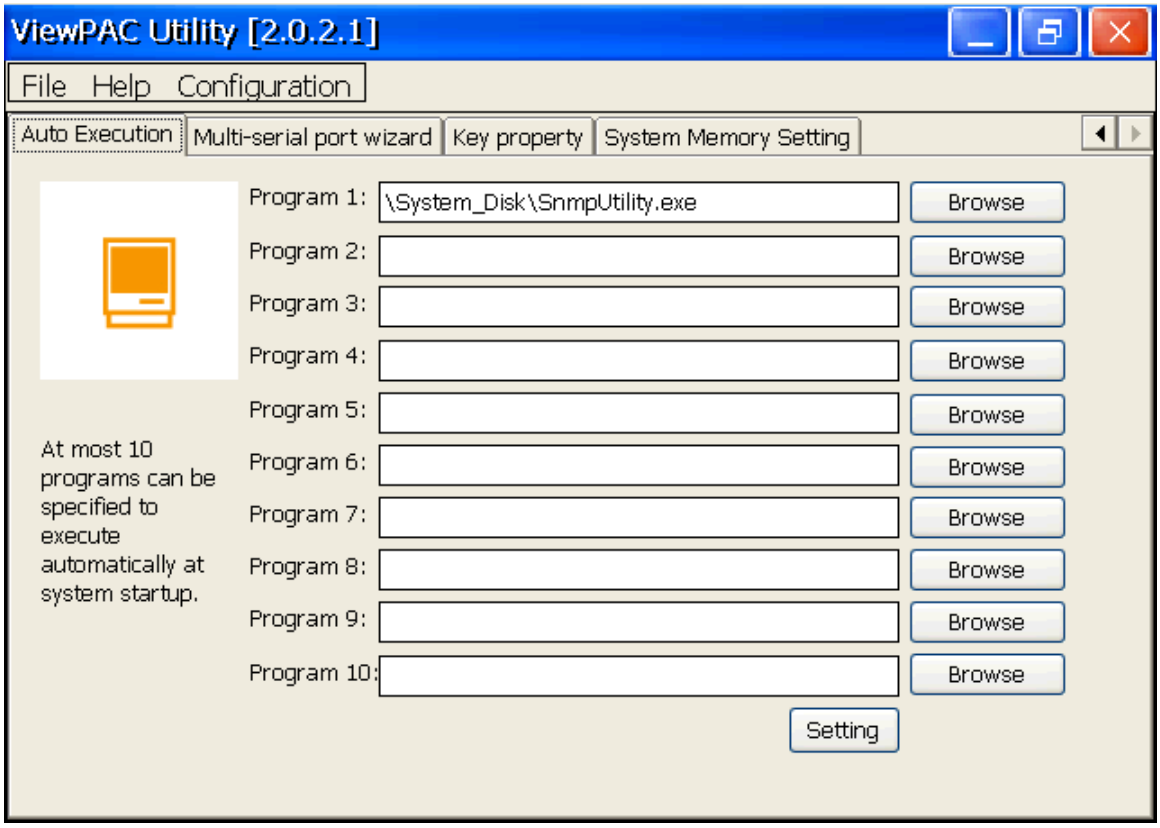

The tab use to	How to use
Configure programs running at startup	Press the **Browse** button to select the execute file which you want, and then press the **Setting** button.

Multi-Serial Port Wizard Tab

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The Multi-serial port provides functions for installation of the RS-232/RS-422/RS-485 communication module driver.

The table below shows the expansion RS-232/RS-422/RS-485 communication modules that are compatible with the ViewPAC.

Item	RS-232	RS-422/RS-485	Isolation	Connector
I-8112iW	2	-	2500 Vrms	DB-9 x 2
I-8114W	4	-	-	DB-37 x 1
I-8114iW	4	-	2500 Vrms	DB-37 x 1
I-8142iW	-	2	2500 Vrms	Terminator block x 1
I-8144iW	-	4	2500 Vrms	Terminator block x 1

The ViewPAC can be expanded to support up to 16 I/O modules.

For more detailed information about these support modules, please refer to

http://www.icpdas.com/products/Remote_IO/i-8ke/selection_rs232_i8k.htm

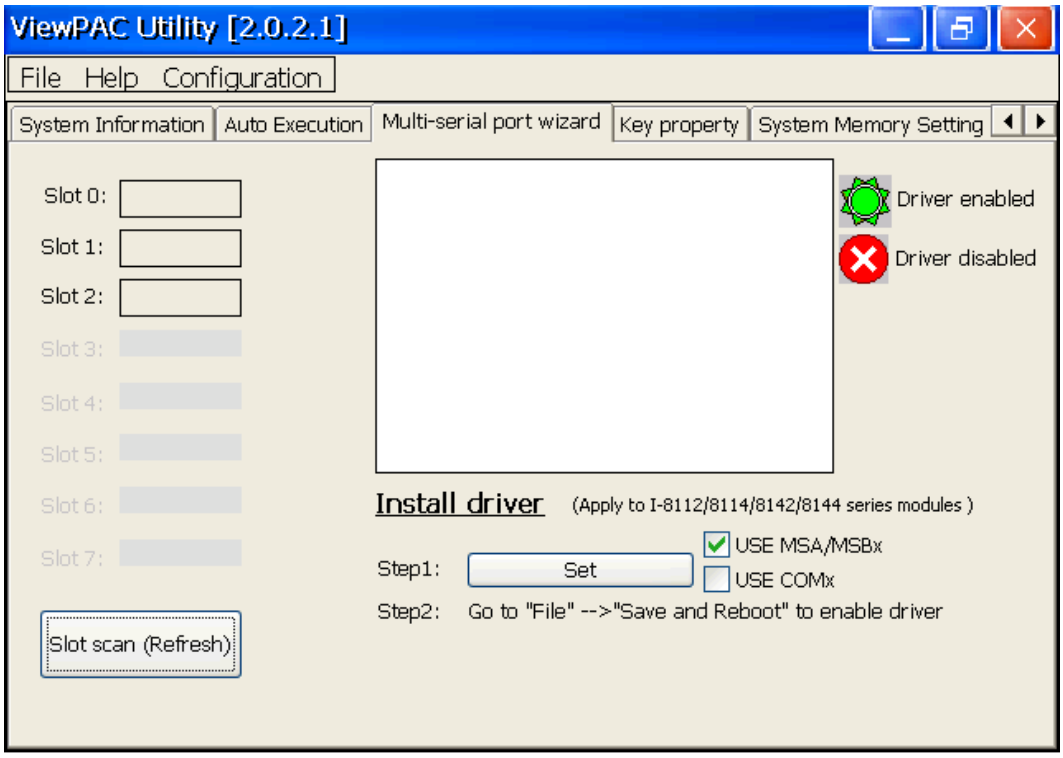

Key Property Tab

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The Key Property tab provides functions to specify the programmable key to launch any program that you wish.

Tips & Warnings

The allowed file types are .exe and .bat.

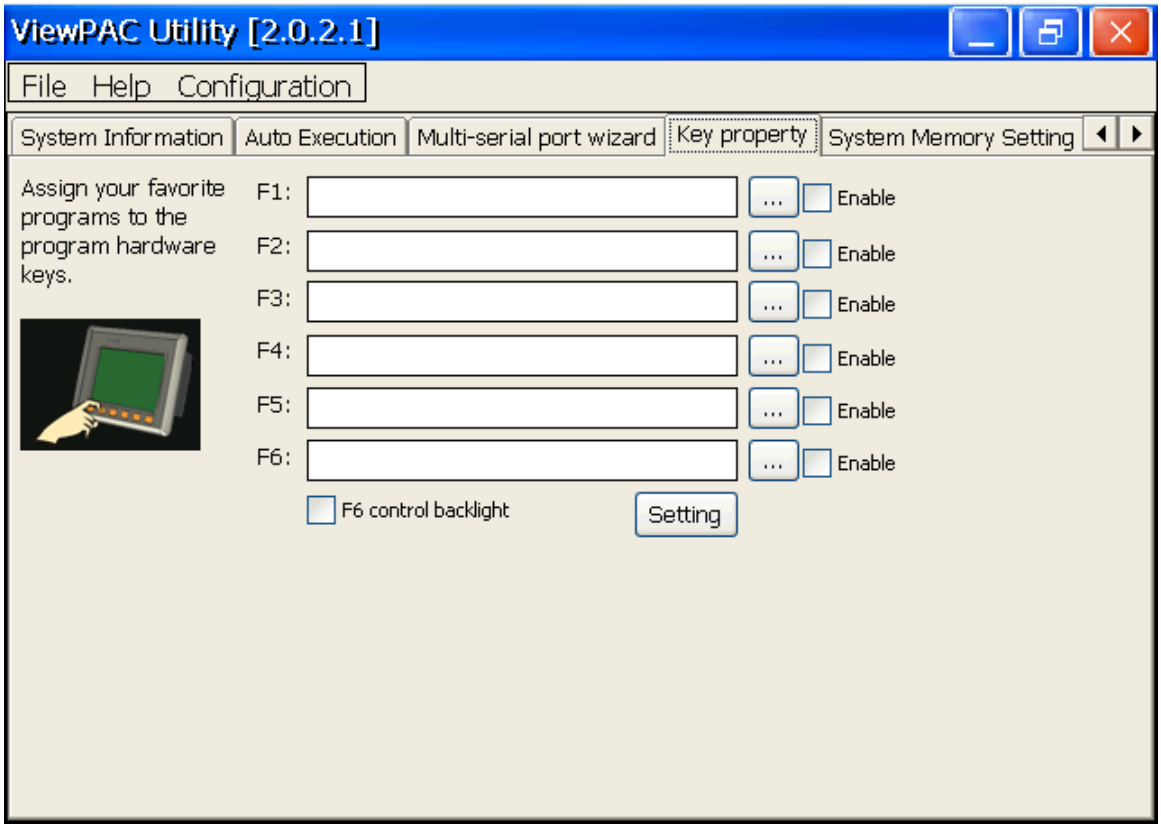

The tab use to	How to use
Specify the programmable key to launch the program	Press the **…** button to select the execute file which you want, select the **Enable** check box, and then press the **Setting** button.
Specify the programmable key to control backlight	Select the **F6 control backlight** check box, and then press the **Setting** button.

System Memory Tab

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The SRAM Setting tab provides functions to adjust and monitor the unused RAM.

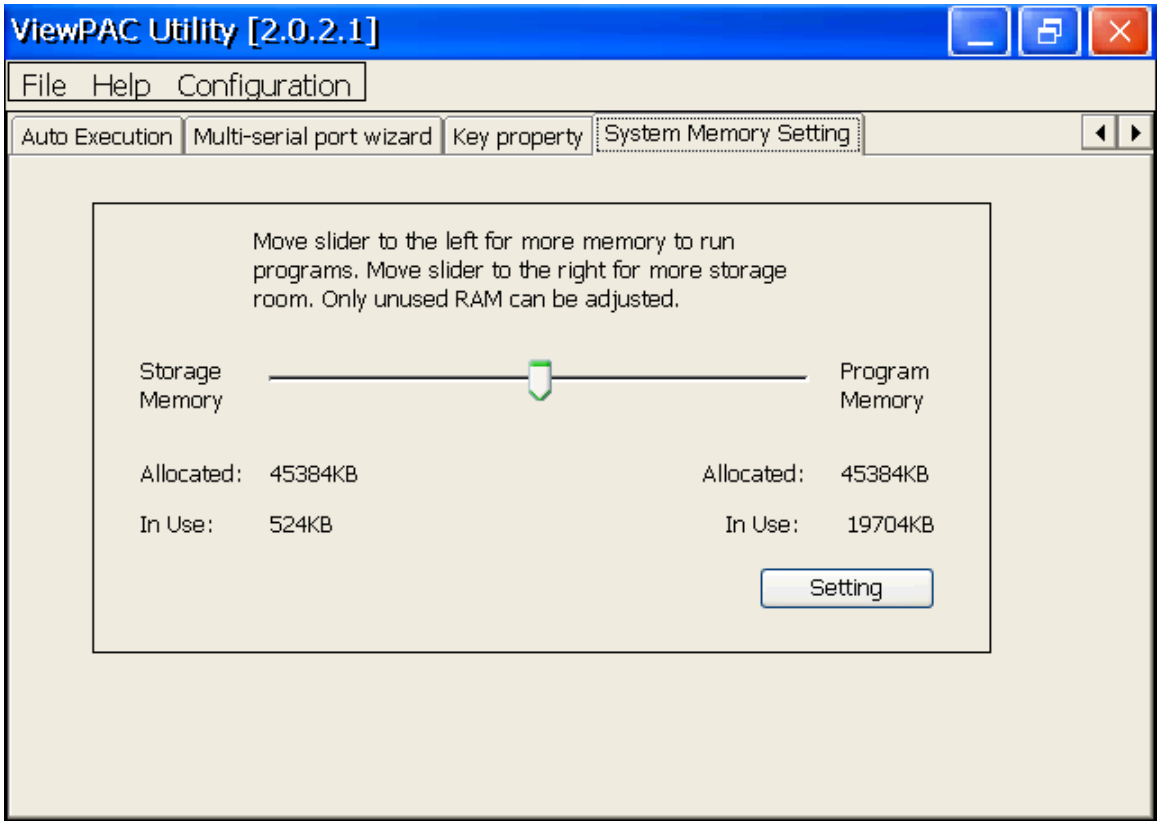
ViewPAC Utility [2.0.2.1]
File Help Configuration
Auto Execution
Multi-serial port wizard
Key property
System Memory Setting
Move slider to the left for more memory to run programs. Move slider to the right for more storage room. Only unused RAM can be adjusted.
Storage Memory
Program Memory
Allocated: 45384KB
In Use: 524KB
Allocated: 45384KB
In Use: 19704KB
Setting

The tab use to	How to use
Adjust display	Move the slider left to release more memory running programs or move the slider right to release more storage room, and then press the Setting button

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4. Your First ViewPAC Program

This chapter describes the components of the ViewPAC SDK, and provides step by step tutorial for developer that will teach you how to create your first ViewPAC program.

Before writing your first program, ensure that you have the necessary development tools and the corresponding ViewPAC SDKs are installed on your system.

4.1. Preparing the Development Tools

There are several programming tools available for application developers targeting Windows CE-based ViewPAC. One of the following tools must be installed on the Host PC.

- ✓ Microsoft eMbedded Visual C++
- ✓ Visual Basic.net
- ✓ Visual C#

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.2. Installing ViewPAC SDKs

The ViewPAC SDK is a Software Development Kit (SDK) that contains C header files, C libraries and documents.

Below is a step by step procedure for installing the ViewPAC SDKs.

Step 1: Insert the CD into your CD-ROM drive

Step 2: Execute the "PAC270_SDK_YYYYMMDD.msi" which is located in

CD:\Napdos\wp-8x4x_ce50\SDK\

The installation program for the latest version of the WinPAC Platform SDKs can be obtained from:

http://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/sdk/

File name: pac270_sdk_yyyymmdd.msi

yyyymmdd: platform sdk released date

Tips & Warnings

The released date of the installation program SDK installation package that provides the PACSDK library must be later than or equal to 2012/10/15, such as PAC270_SDK_20121015.msi

Step 3: Follow the prompts until the installation is complete

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

4.3. Understanding the ViewPAC APIs

The ViewPAC SDKs includes several application programming interfaces (APIs) that allows you perform various supporting tasks when developing ViewPAC.

- **Requirements**

The ViewPAC SDK only supports NET Framework 2.0 or above.

- **Installation Path**

After installing the ViewPAC SDKs, a number of functions can be installed on the Host PC, and this installation puts the header files, libraries into the following public places so they are easily changed by update the ViewPAC SDKs.

Header files:

C:\Program Files\Windows CE Tools\wce500\PAC270\Icpdas\Include\ARMV4I\

Libraries:

C:\Program Files\Windows CE Tools\wce500\PAC270\Icpdas\Lib\ARMV4I\

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.3.1. ViewPAC SDK Overview

4.3.1.1. WinPAC Standard API

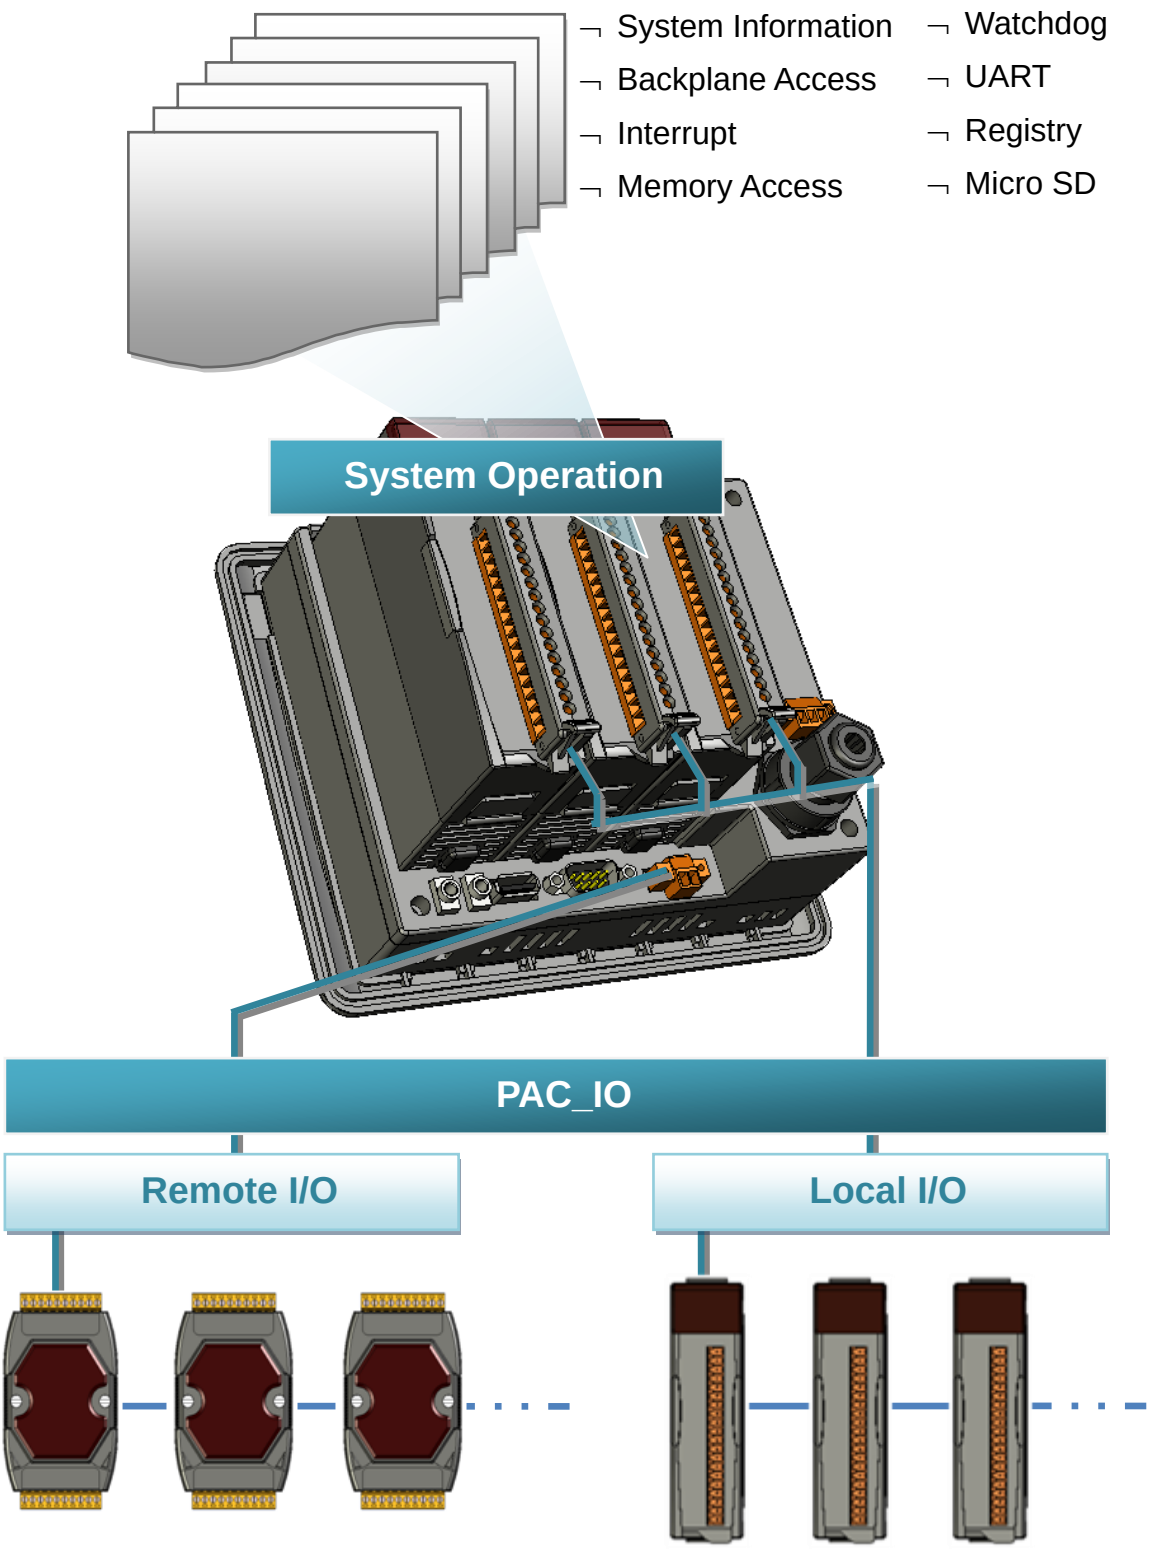

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

- **SystemInformation Functions**

Provides reference information for the system status.

- **Backplane Access API**

Provides reference information for the backplane access APIs, including Hot Plug and backplane information.

- **Interrupt API**

Provides reference information for the Interrupt APIs

- **Memory Access API**

Provides reference information for the memory R/W APIs, including EEPROM and SRAM.

- **Watchdog Functions**

Provides reference information for the watchdog APIs, including hardware watchdog and OS watchdog.

- **UART API**

Provides reference information for the UART APIs.

- **Registry API**

Provides reference information for the registry.

- **microSD Management API**

Provides reference information for the microSD Manager.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

- **PAC_IO API**

Provides reference information for IO APIs, including local and remote.

In additions, no matter 8K or 87K modules use the same API.

- **Error Handling API**

Provides reference information for error handling.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.3.1.2. ViewPAC Particular API

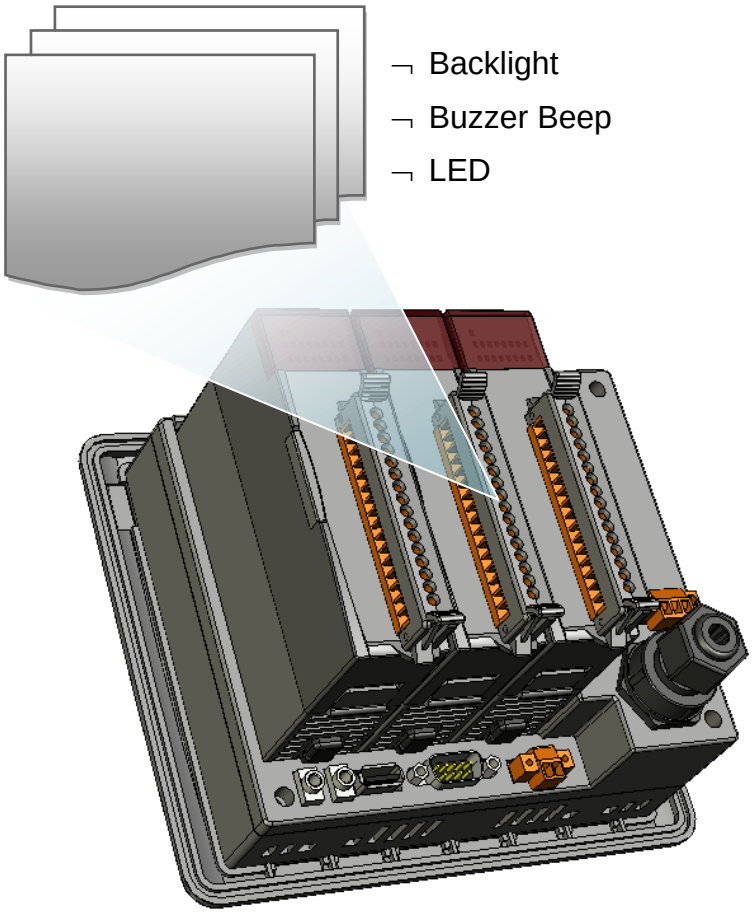

- **Backlight Functions**

Provides reference information for the backlight.

- **Buzzer Beep Functions**

Provides reference information for the buzzer.

- **LED Functions**

Provides reference information for the LED

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.3.2. ViewPAC SDK Reference

For full usage information regarding the description, prototype and the arguments of the functions, please refer to the “WinPAC Standard API Manual” and “ViewPAC Particular API Manual” located at:

CD:\Napdos\vp-2000_ce50\Document\SDK_Document\
ftp://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/document/sdk_document/

✓ WinPAC Standard API Manual

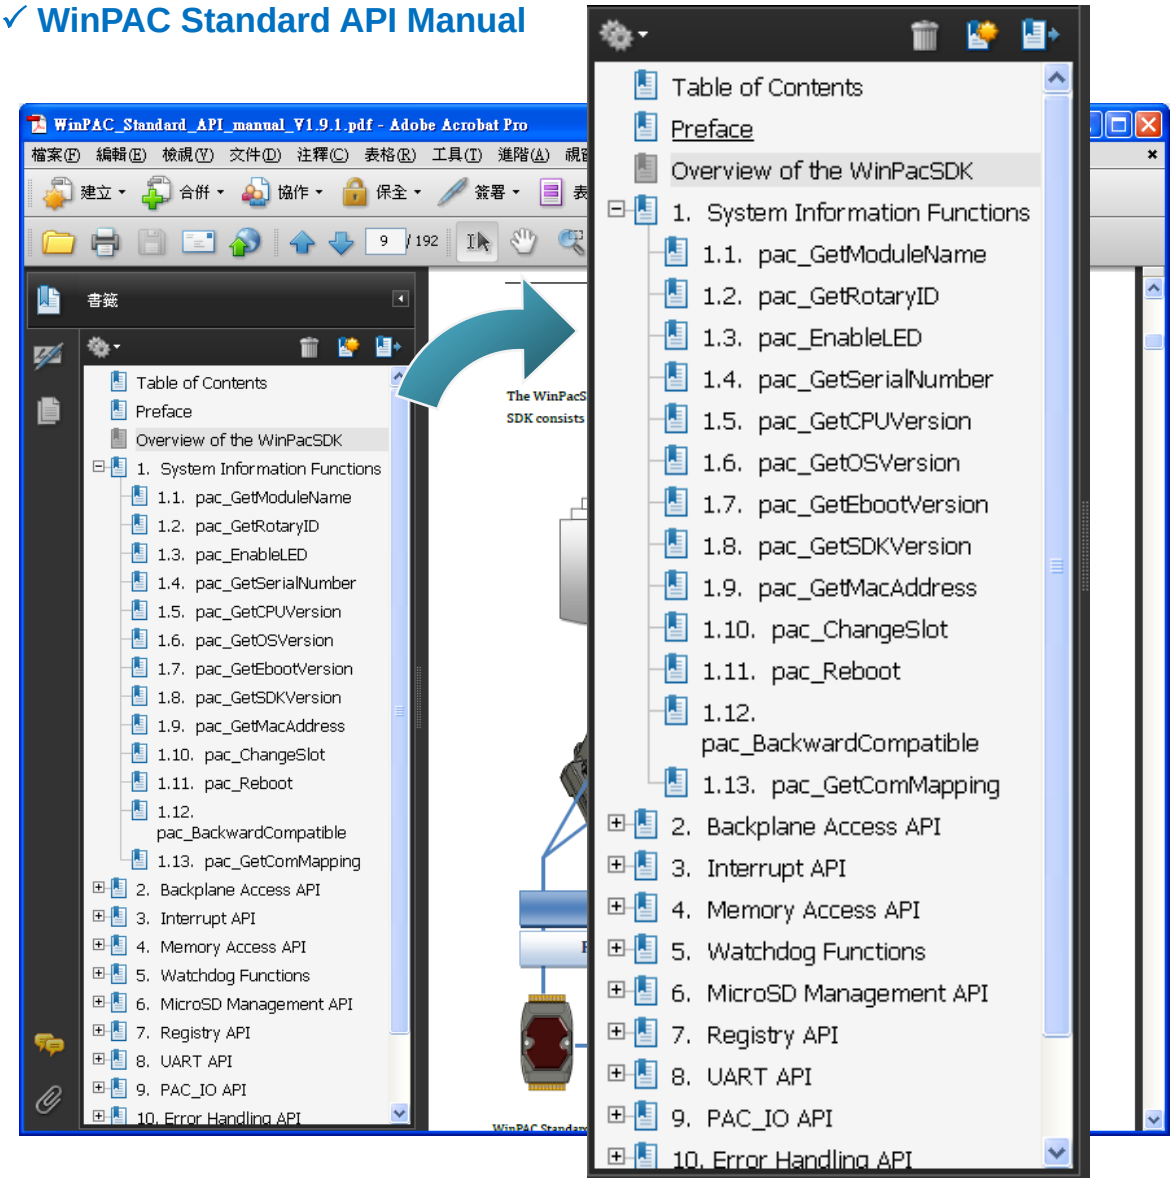

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

✓ ViewPAC Particular API Manual

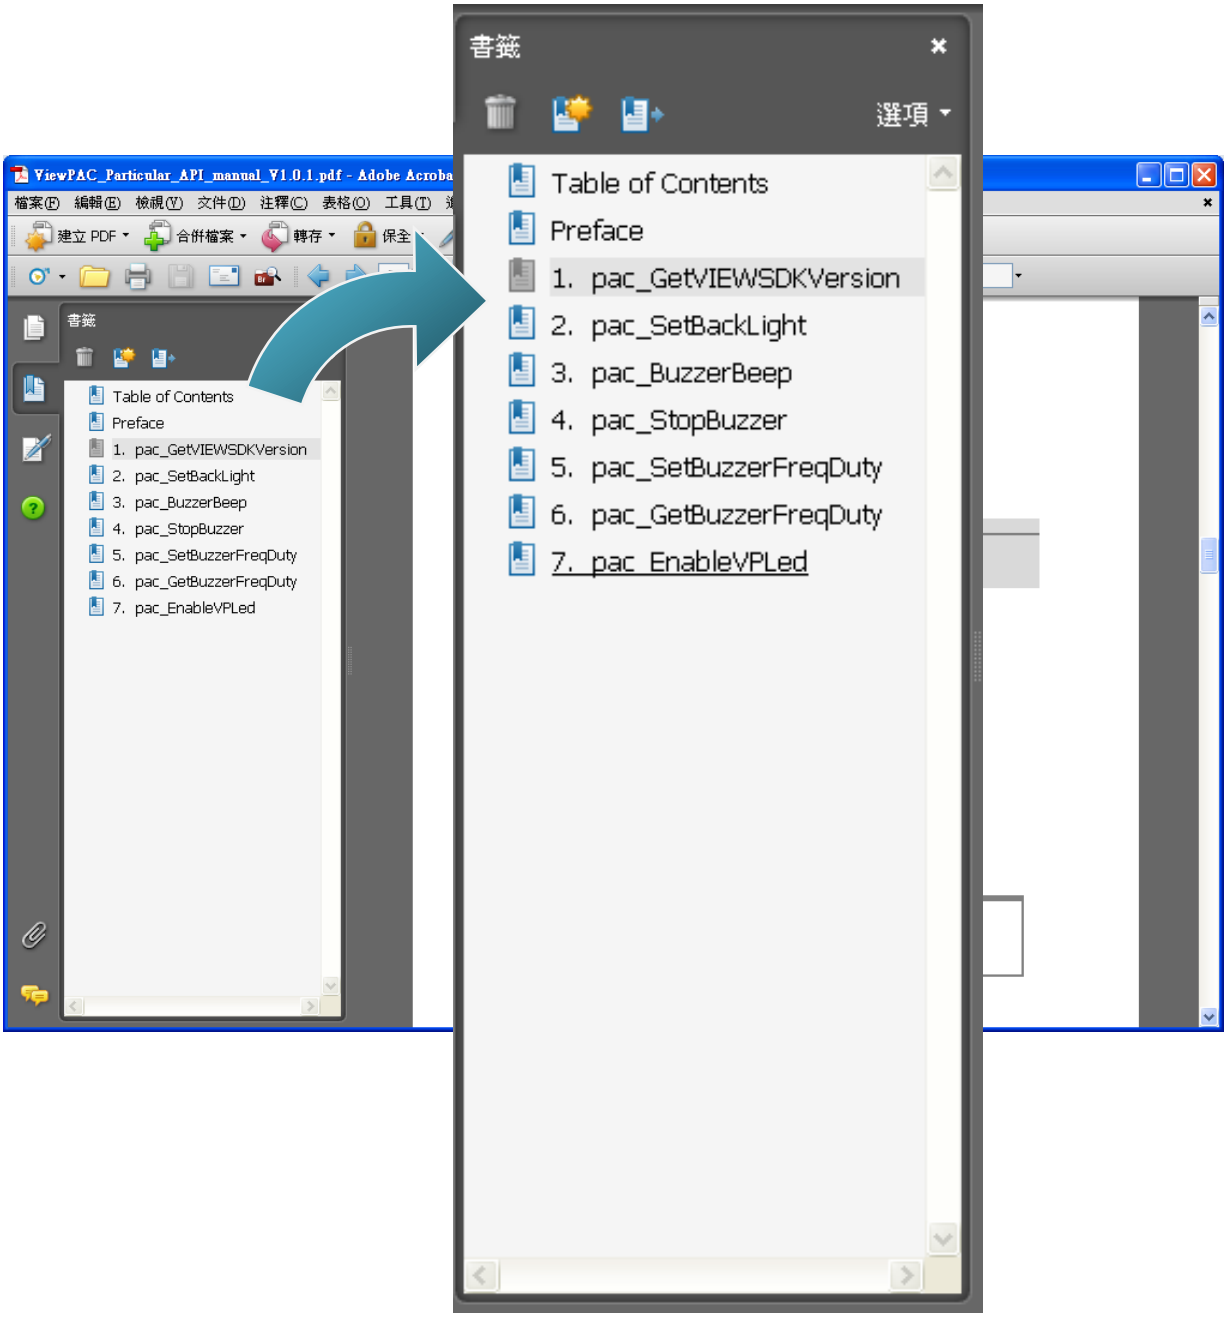

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.4. Your First Program in C#

To create a demo program with C# development tool includes the following main steps:

1. Create a new project
2. Add project reference for an application
3. Design and Build an application program
4. Execute the application on the ViewPAC

All main steps will be described in the following subsection.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.4.1. Create a new project

Step 1: Start the Visual Studio 2005

Step 2: On the “File” menu, select the “New” command, and then click the “Project” command

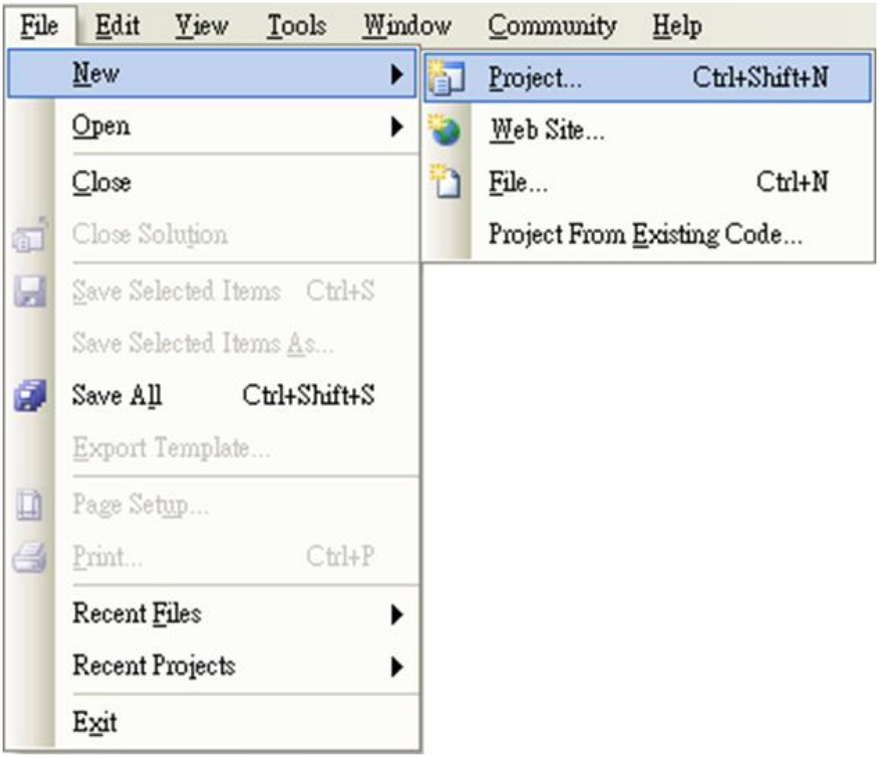

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: In the “New Project” dialog box do the following in this order

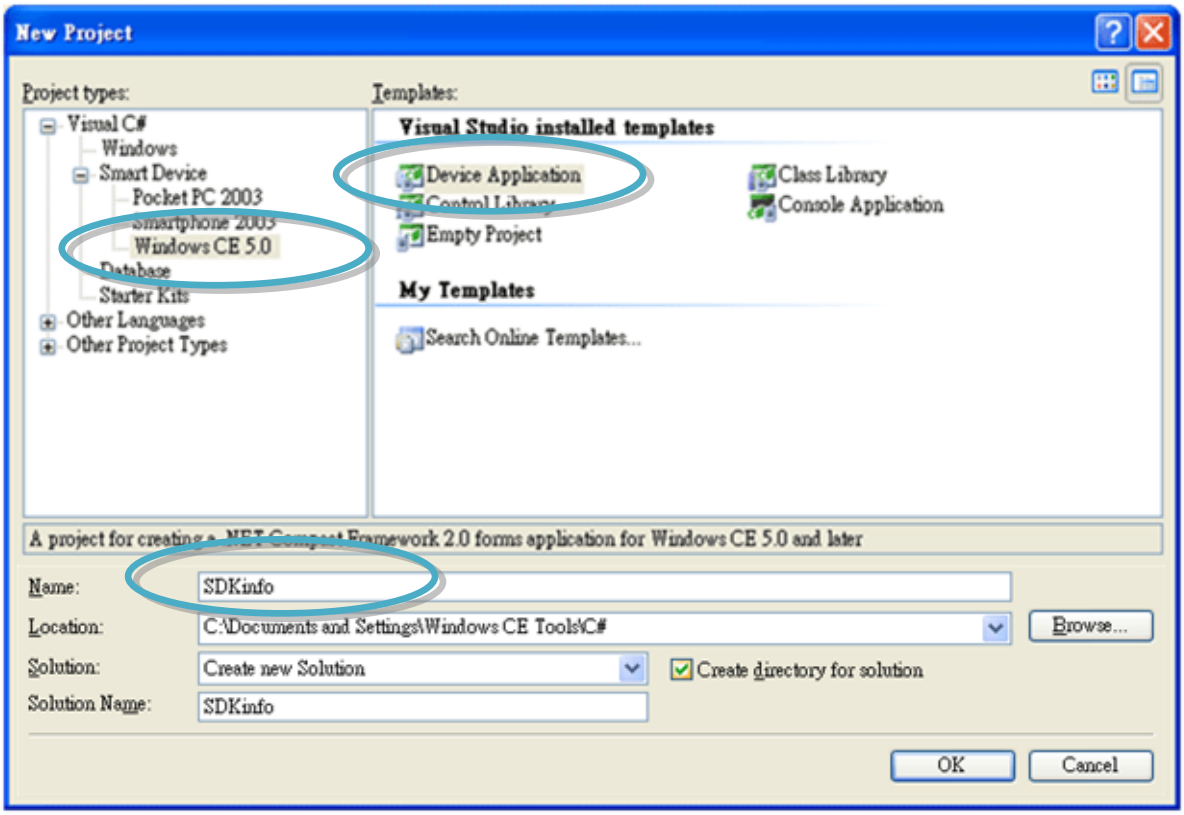

Step 4: Click OK to start creating a “SDKinfo” project

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.4.2. Add project reference for an application

Step 1: On the “Solution Explorer” window, right-click the “Reference” and then click the “Add Reference…” command

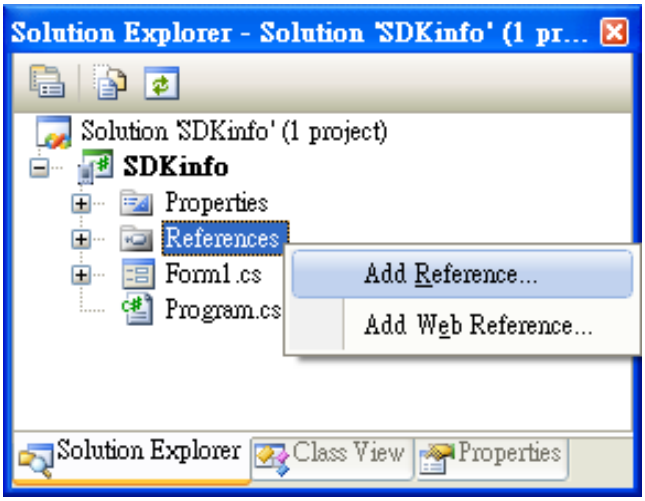

Step 2: In the “Add Reference” dialog box, select the “Browse” tab, and then specify the directory of the “ViewPacNet.dll” file in the “File name” field

The “ViewPACnet.dll” file can be obtained from:

CD:\Napdos\vp-2000_ce50\SDK\ViewPACNet\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/sdk/ViewPACnet/

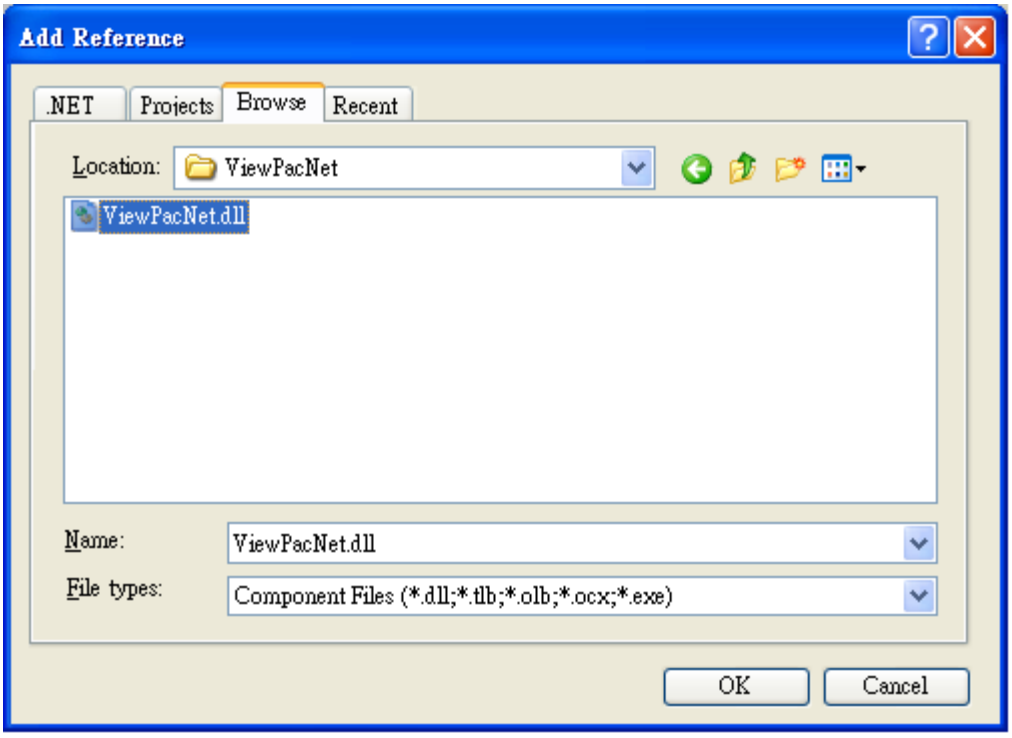

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.4.3. Design and Build an application program

Step 1: Add a **“button” object in the “From1” dialog box**

Step 2: Right-click the “button” object and click the “Properties” command

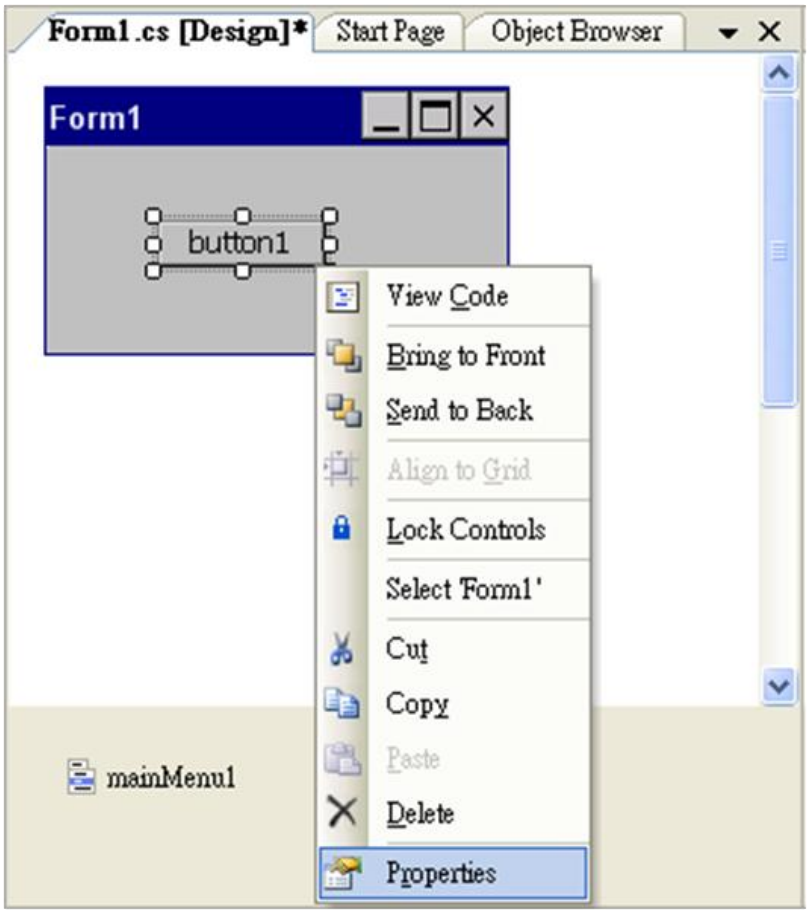

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: On the “Properties” window, type “Check the SDK version” in the “Text” edit box

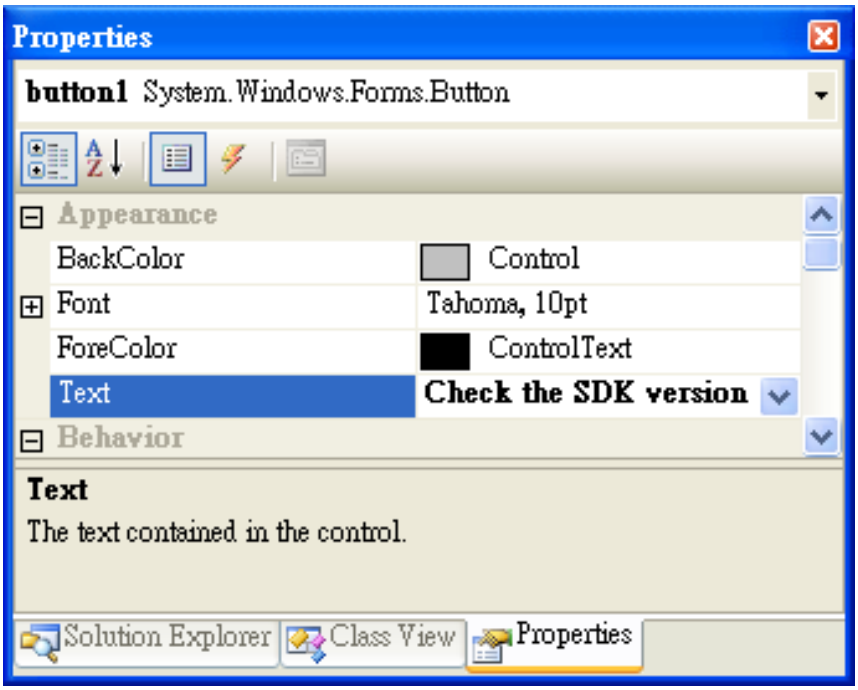

Step 4: Right-click the “Form1” dialog box and click the “View Code” command to open the editor window

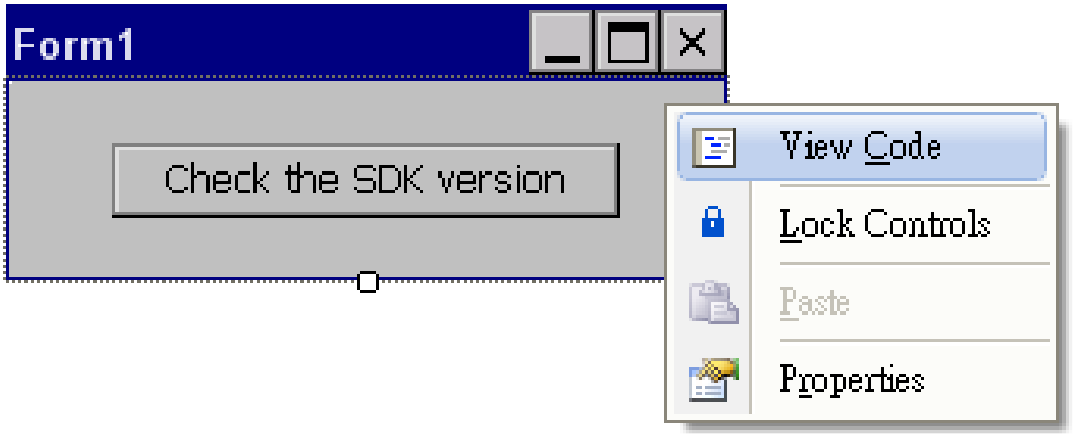

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 5: Insert the “using ViewPACNet;” into the header area after “using System.Windows.Forms;”

```
using System;
using System.Linq;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Text;
using System.Windows.Forms;
using ViewPACNet;

namespace SDKinfo
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();
        }
    }
}
```

Step 6: In the “Form1” dialog box, double-click the “button” object to open the editor window

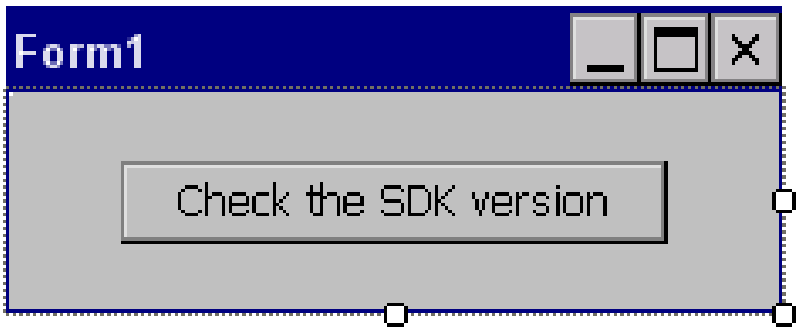

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 7: Insert the following code in the Editor Window

MessageBox.Show(pac_GetVIEWSDKVersion());

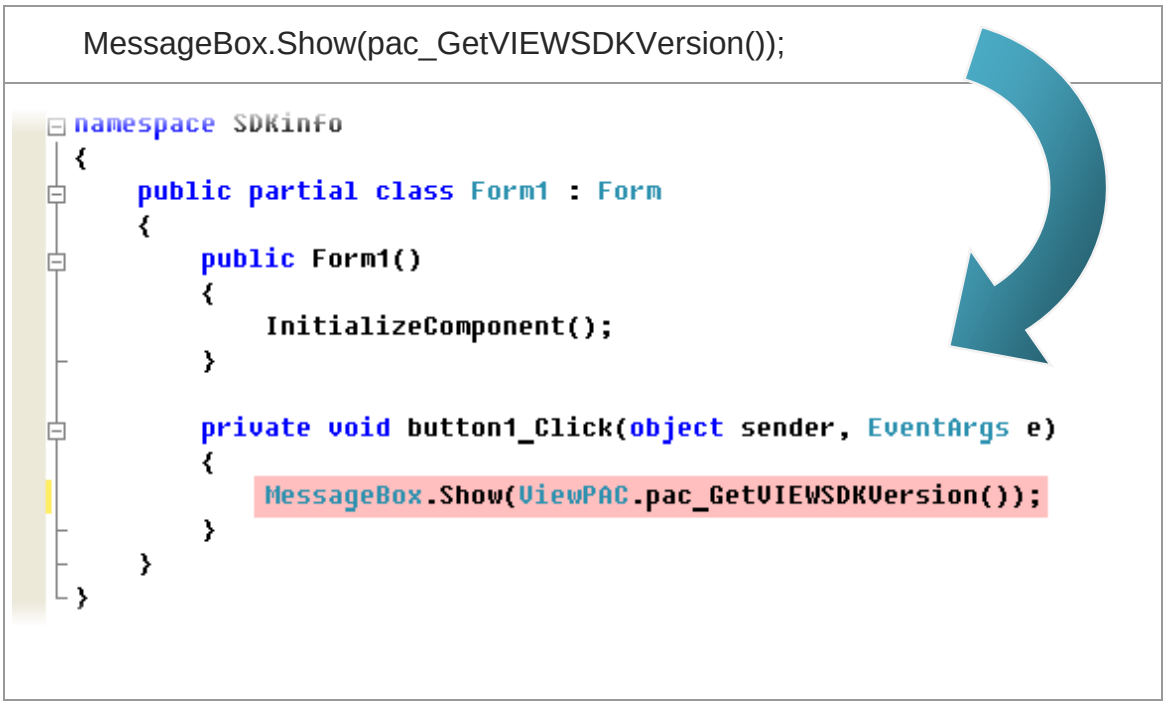

```
namespace SDKinfo
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();
        }

        private void button1_Click(object sender, EventArgs e)
        {
            MessageBox.Show(ViewPAC.pac_GetVIEWSDKVersion());
        }
    }
}
```


Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

4.4.4. Execute the application on the ViewPAC

Step 1: On the “Build” menu, click the “Build Solution” command

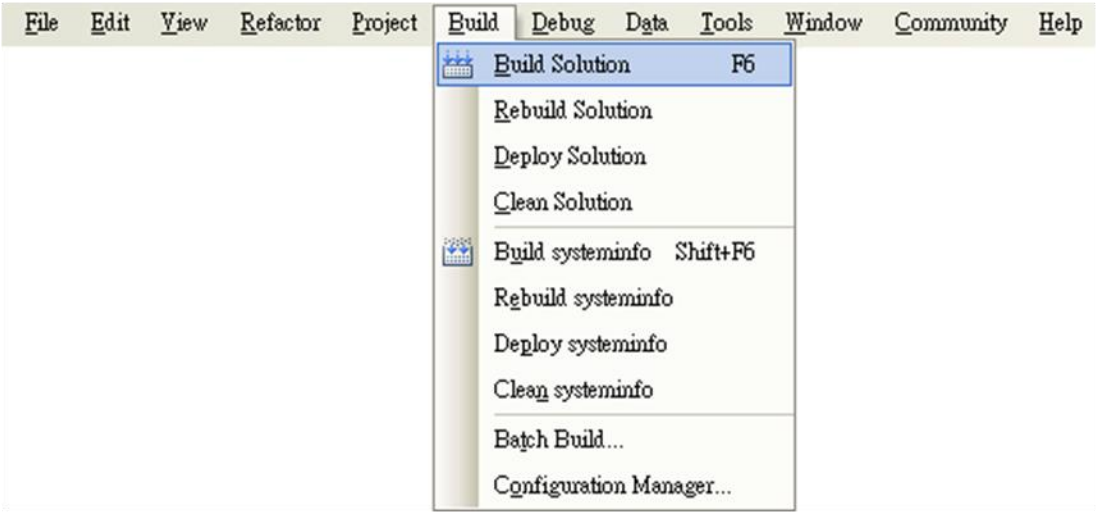

Step 2: Open the web browser and type the IP address to connect the FTP server of ViewPAC

Step 3: Upload the “SDKinfo.exe” application and the corresponding “ViewPacNet.dll” file to the ViewPAC via the ViewPAC FTP server

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Tips & Warnings

For applications programming in C# and VB.net with .net framework, when executing these application on the ViewPAC controller, the corresponding “ViewPACnet.dll” file must be in the same directory as the .exe file

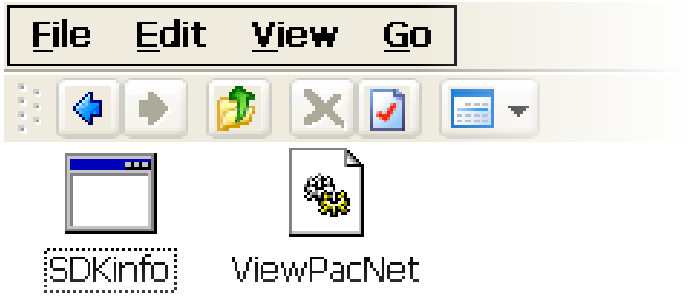

Step 4: On the ViewPAC, execute the uploaded file

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.5. Your First Program in VB.net

To create a demo program with C# development tool includes the following main steps:

1. Create a new project
2. Add project reference for an application
3. Design and Build an application program
4. Execute the application on the ViewPAC

All main steps will be described in the following subsection.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.5.1. Create a new project

Step 1: Start the Visual Studio 2005

Step 2: On the “File” menu, select the “New” command, and then click the “Project” command

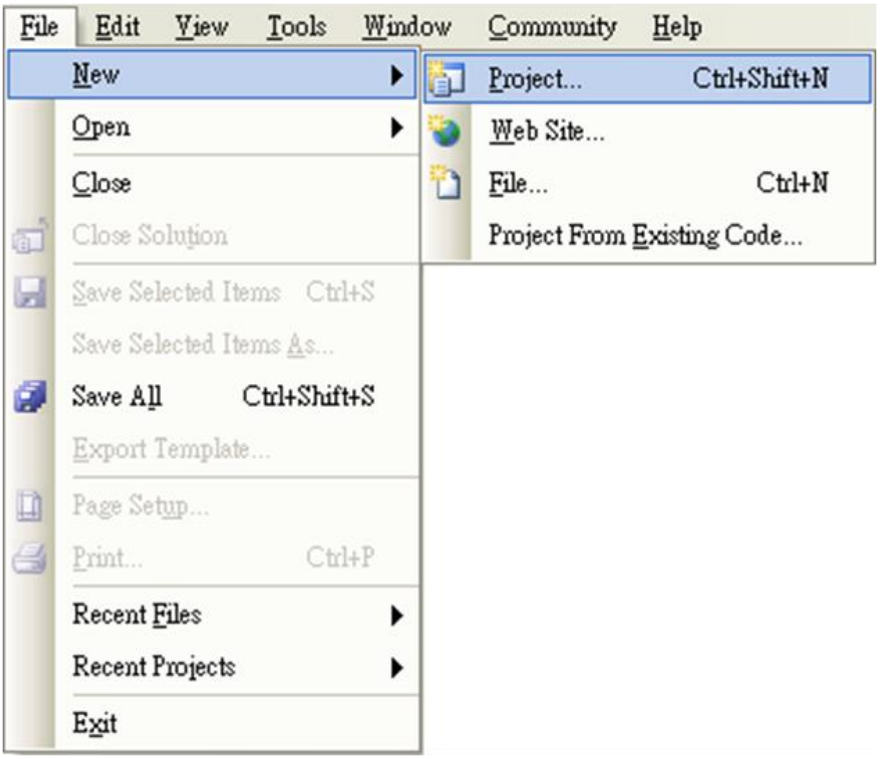

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: In the “New Project” dialog box do the following in this order

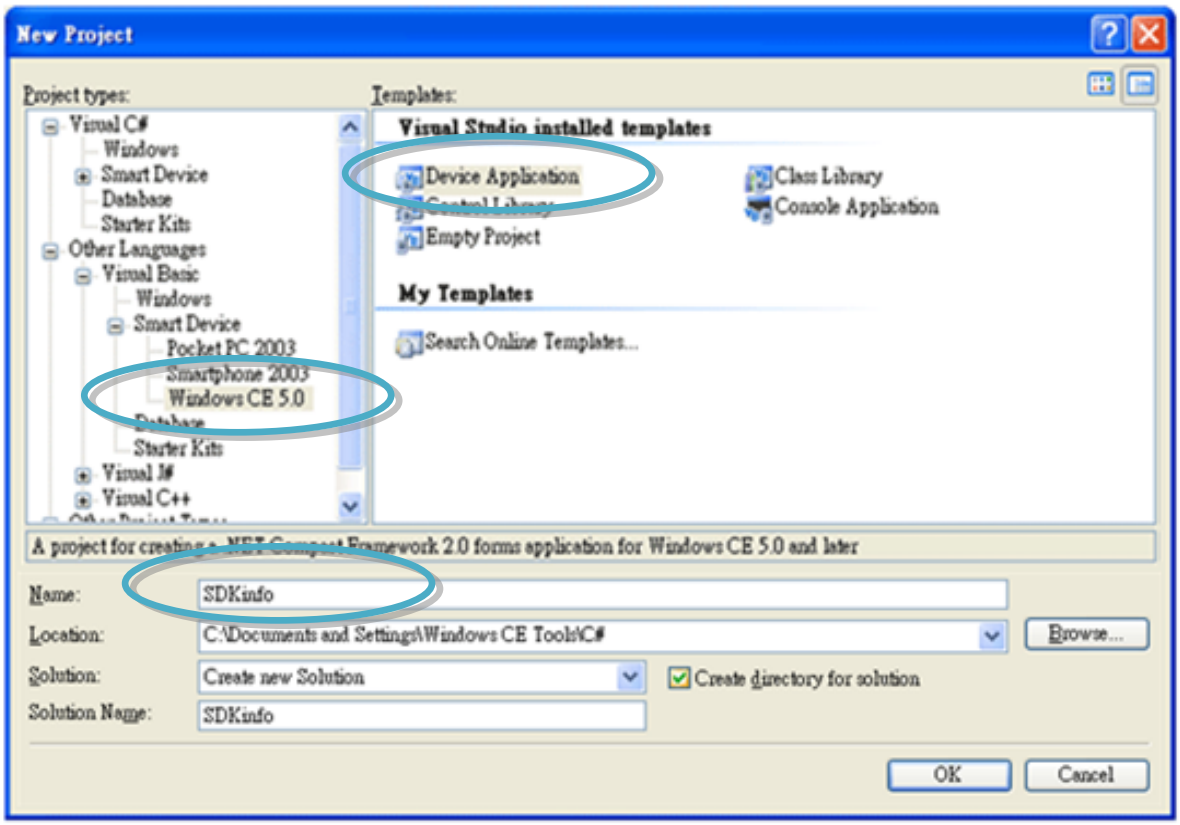

Step 4: Click OK to start creating a “SDKinfo” project

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.5.2. Add project reference for an application

Step 1: On the “Class View” window, right-click the “Reference” and then click the “Add Reference…” command

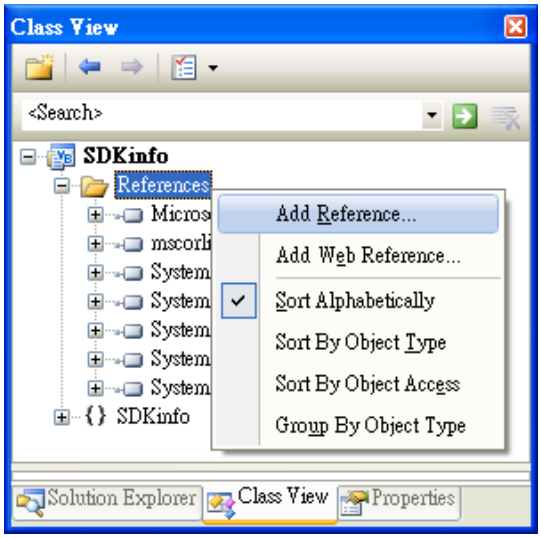

Step 2: In the “Add Reference” dialog box, select the “Browse” tab, and then specify the directory of the “ViewPACNet.dll” file in the “File name” field

The “ViewPacNet.dll” file can be obtained from:

CD:\Napdos\vp-2000_ce50\SDK\ViewPACNet\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/sdk/ViewPACnet/

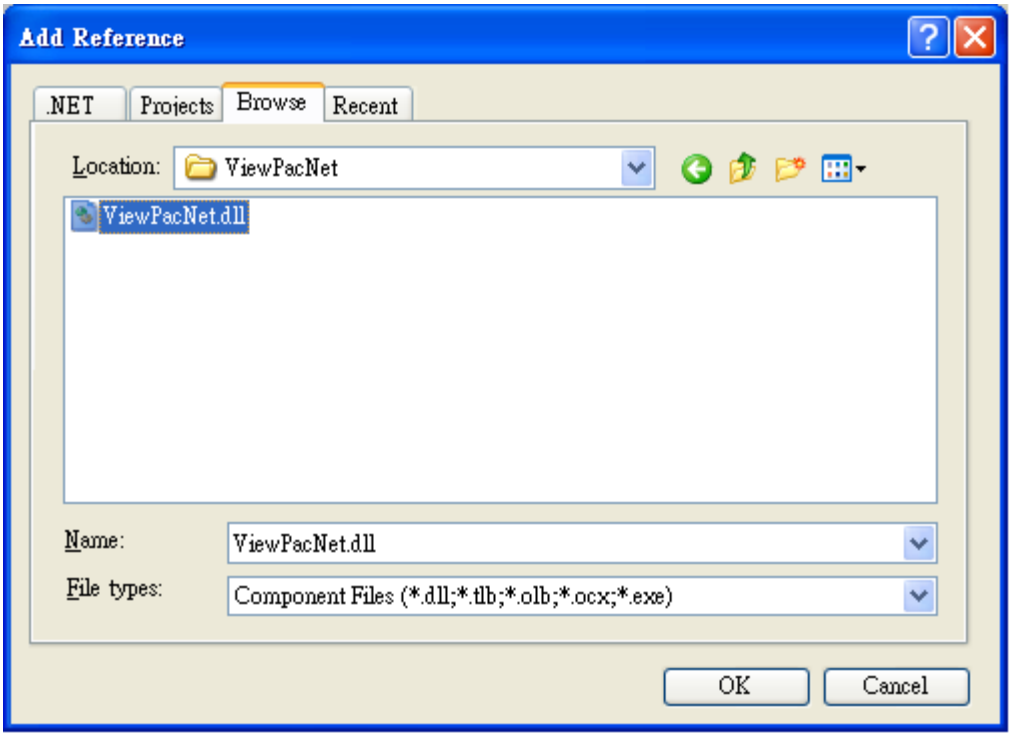

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.5.3. Design and Build an application program

Step 1: Add a **“button” object in the “From1” dialog box**

Step 2: Right-click the “button” object and click the “Properties” command

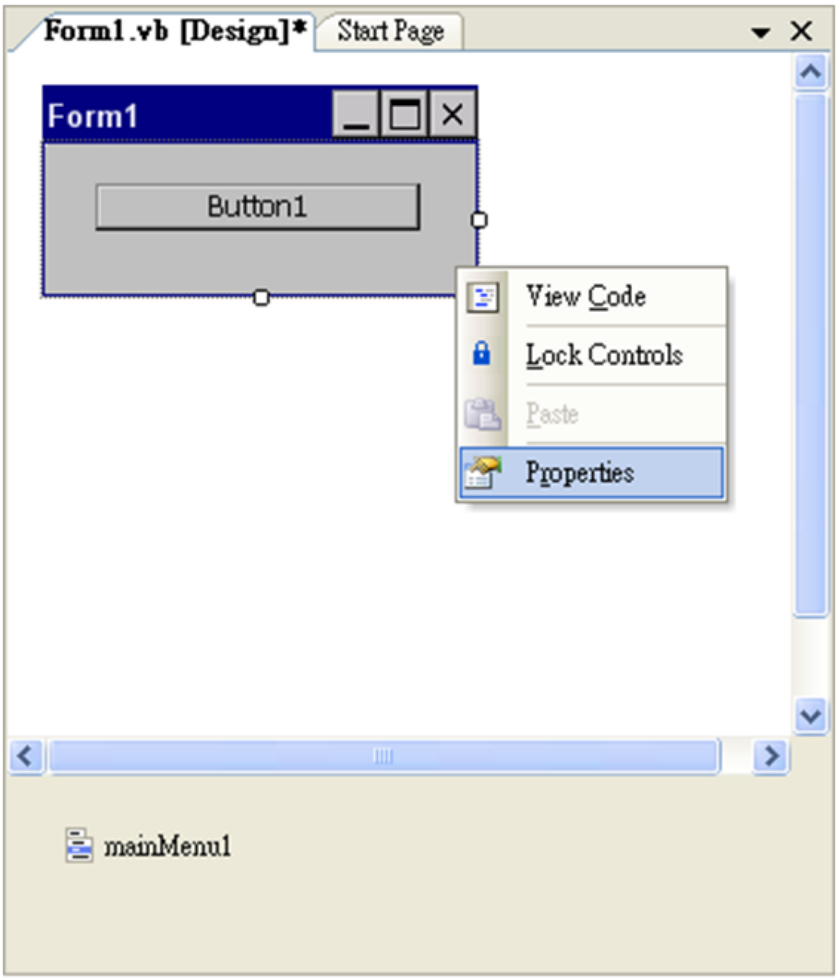

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: On the “Properties” window, type “Check the SDK version” in the “Text” edit box

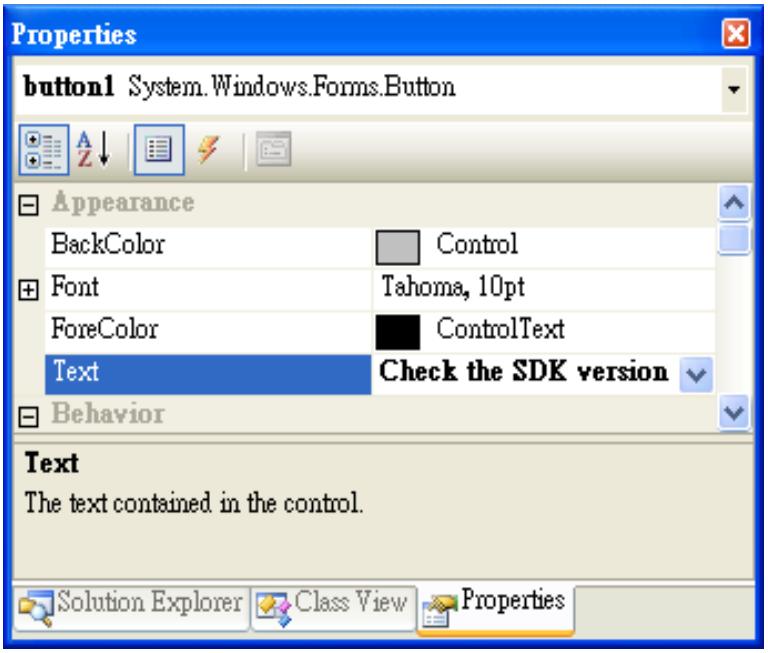

Step 4: In the “Form1” dialog box, double-click the “button” object to open the editor window

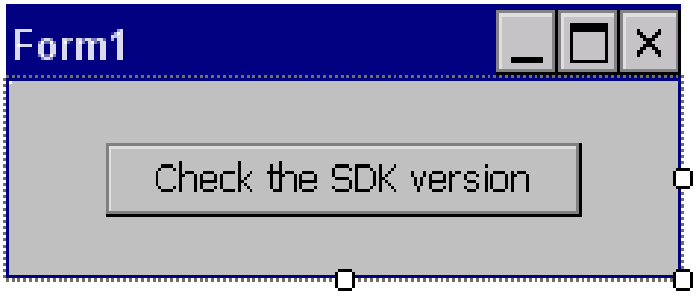

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 5: Insert the following code in the Editor Window

1. Imports ViewPacNet
2. MessageBox(ViewPACNet.pac_GetOSVersion())

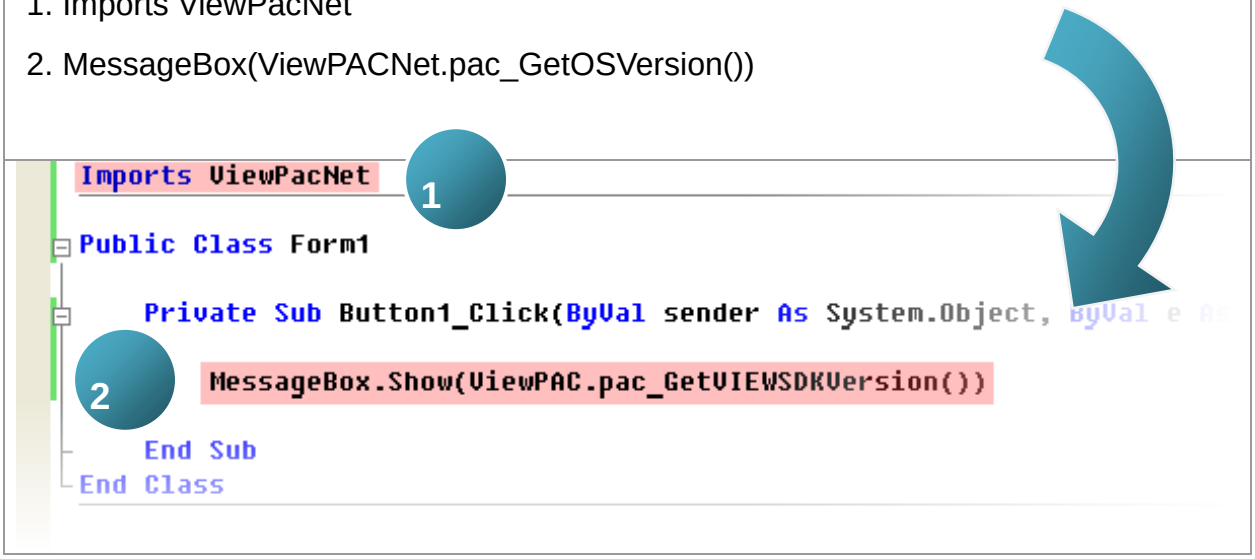

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.5.4. Execute the application on the ViewPAC

Step 1: On the “Build” menu, click the “Build Solution” command

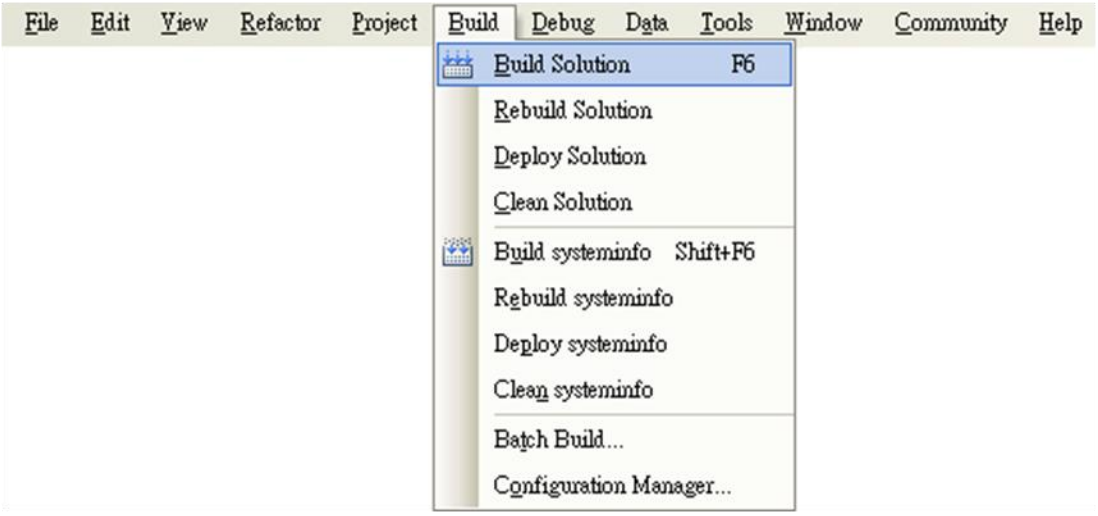

Step 2: Open the web browser and type the IP address to connect the FTP server of ViewPAC

Step 3: Upload the “SDKinfo.exe” application and the corresponding “ViewPacNet.dll” file to the ViewPAC via the ViewPAC FTP server

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Tips & Warnings

For applications programming in C# and VB.net with .net framework, when executing these application on the ViewPAC controller, the corresponding “ViewPACnet.dll” file must be in the same directory as the .exe file

Step 4: On the ViewPAC, execute the uploaded file

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6. Your First Program in eMbedded Visual C++

To create a demo program with eMbedded Visual C++ development tool includes the following main steps:

1. Create a new Forms-Based project
2. Configure compiler options
3. Design and Build an application program
4. Execute the application on the ViewPAC

All main steps will be described in the following subsection.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.1. Create a new Forms-Based project

Step 1: Start the Microsoft Embedded Visual C++

Step 2: From the “File” menu, click the “New” command

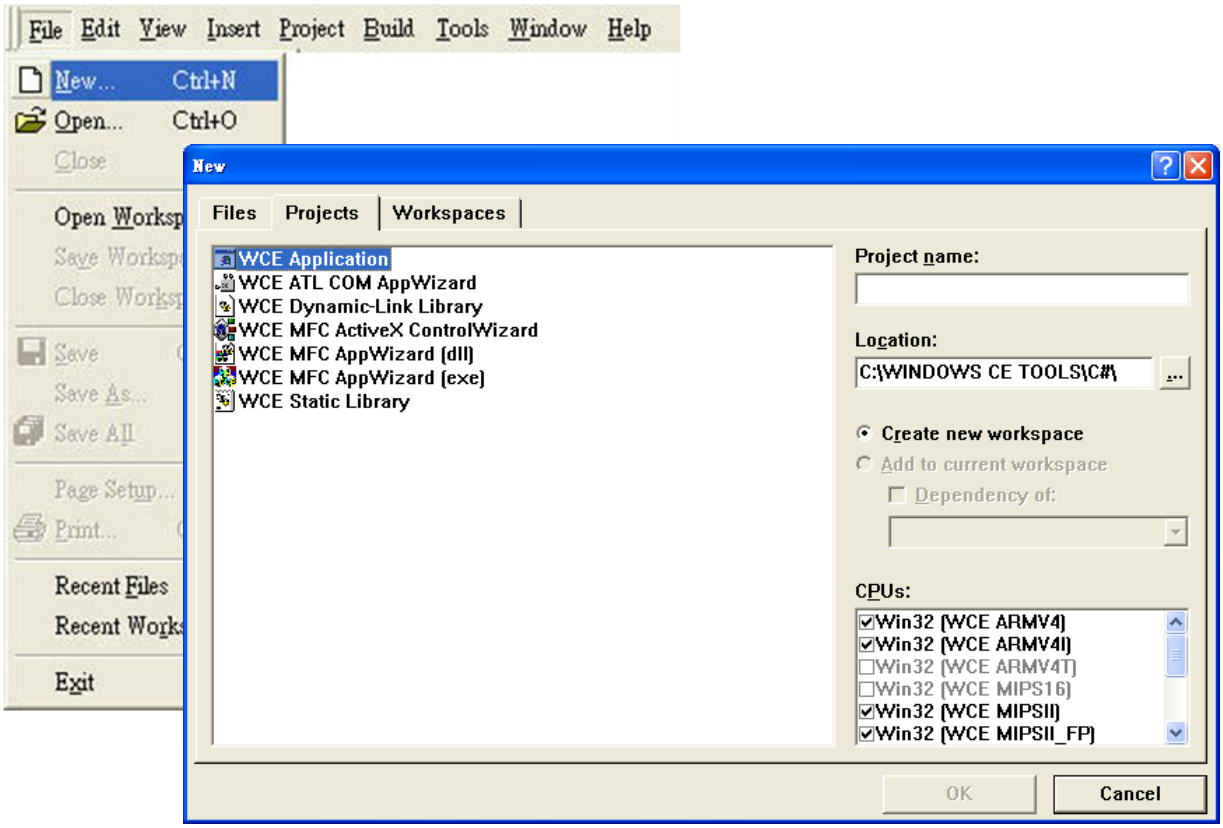

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: In the “New” dialog, select the “Projects” tab and do the following in this order

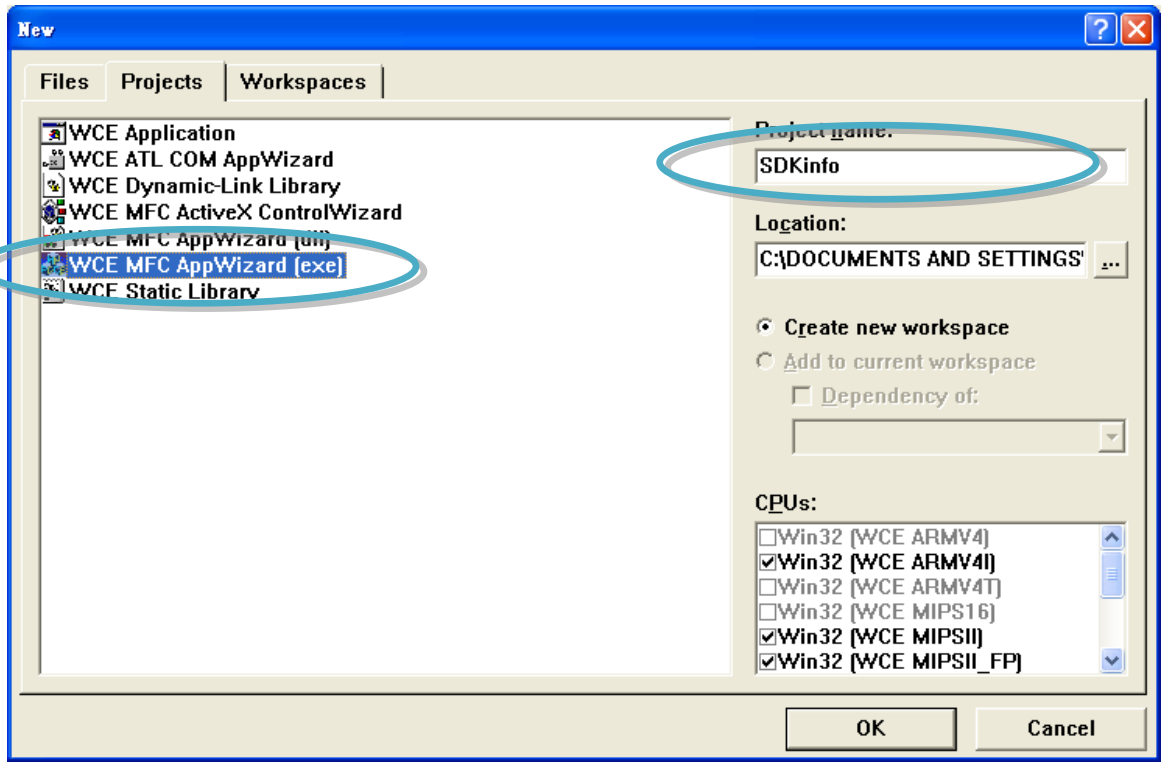

Tips & Warnings

The selected CPU type must have “Win32 [WCE ARMV4I]”

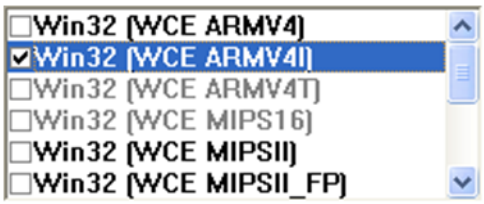

Step 4: Click the “OK” button to start the wizard

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 5: On the first page of the wizard, select “Dialog based” option and then click the “Next” button to the next step

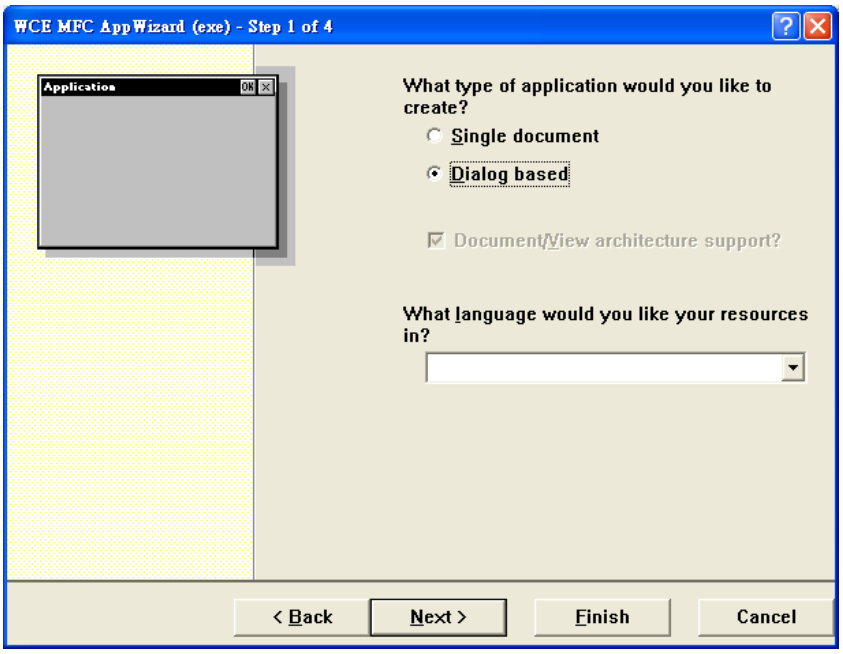
WCE MFC AppWizard (exe) - Step 1 of 4
Application
What type of application would you like to create?
Single document
Dialog based
Document/View architecture support?
What language would you like your resources in?
< Back
Next >
Finish
Cancel

Step 6: On the next page of the wizard, leave all the options as they are, and then click the “Next” button to the next step

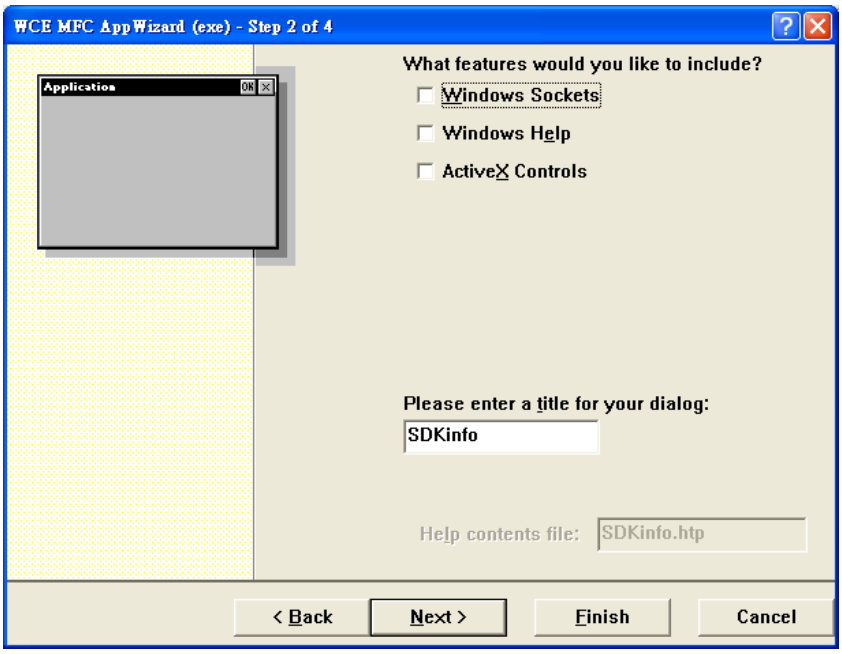

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 7: On the next page of the wizard, leave all the options as they are, and then click the “Next” button to the next step

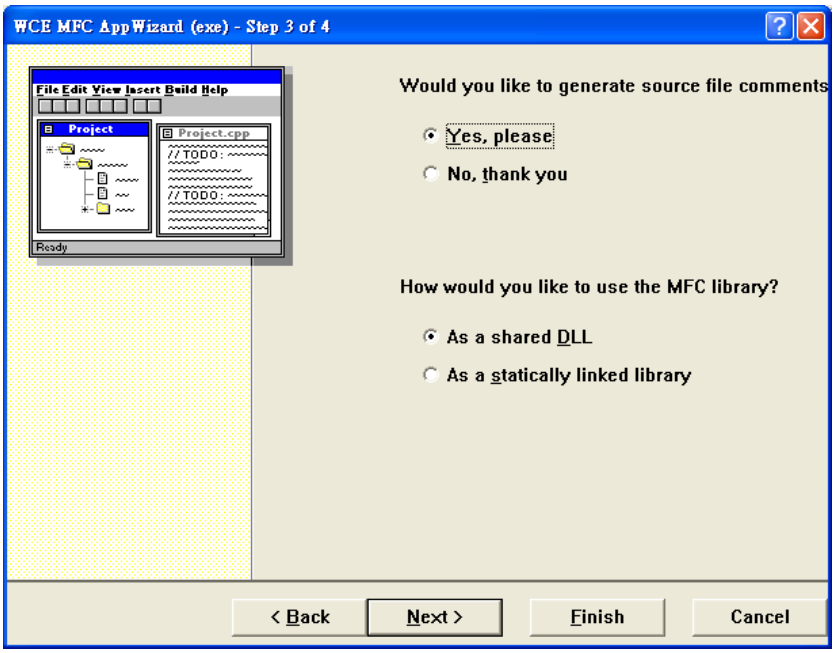

Step 8: On the next page of the wizard, leave all the options as they are, and then click the “Finish” button to complete the wizard

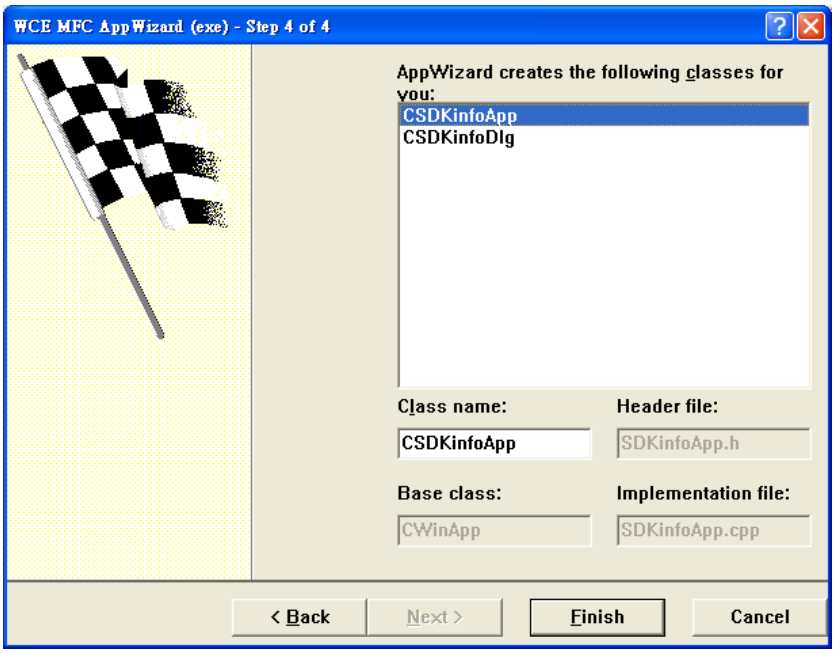

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 9: The final summary appears, click the “OK” button to exit the wizard

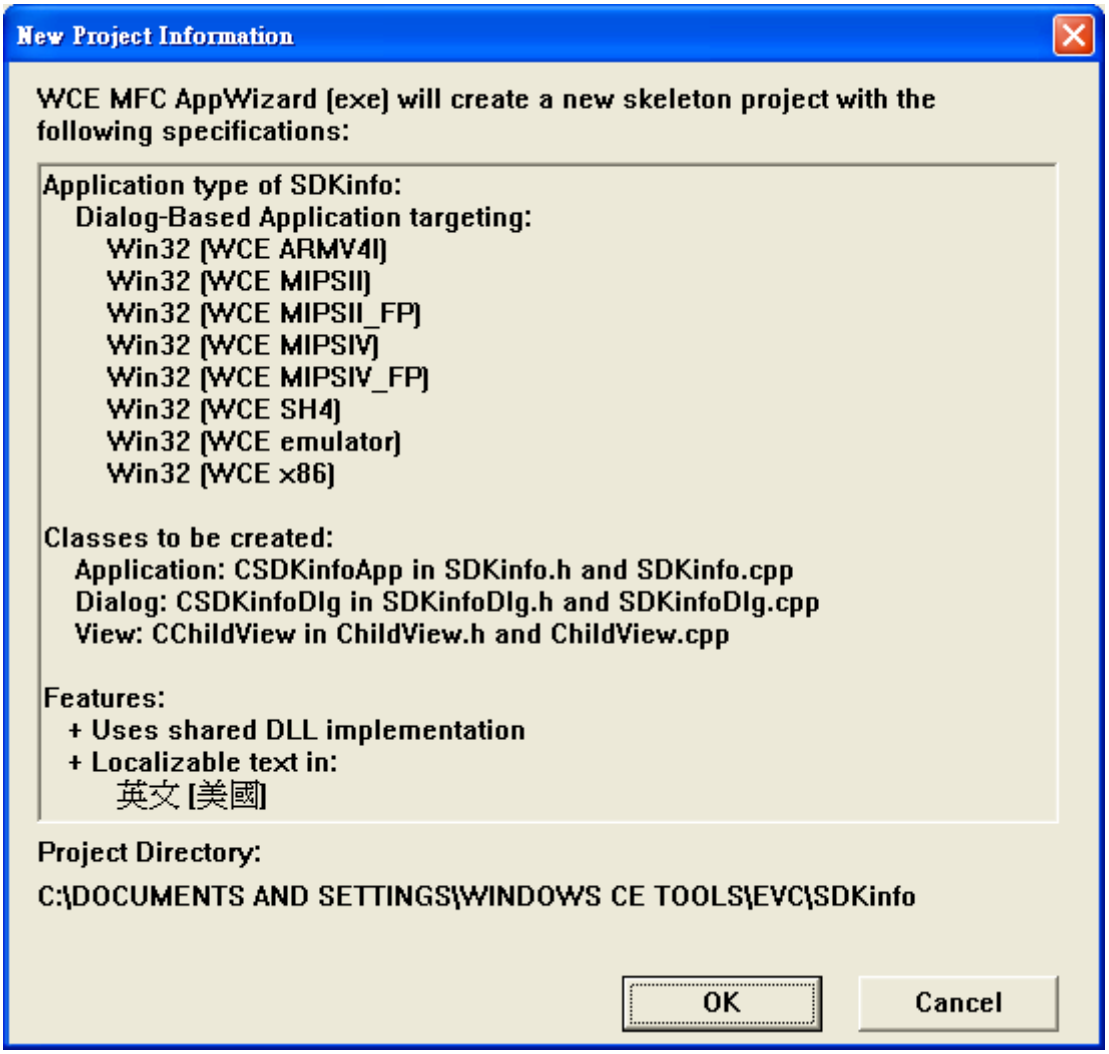

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.2. Configure compiler options

On the WCE configuration toolbar, select the “Win32 [WCE ARMV4] Release”

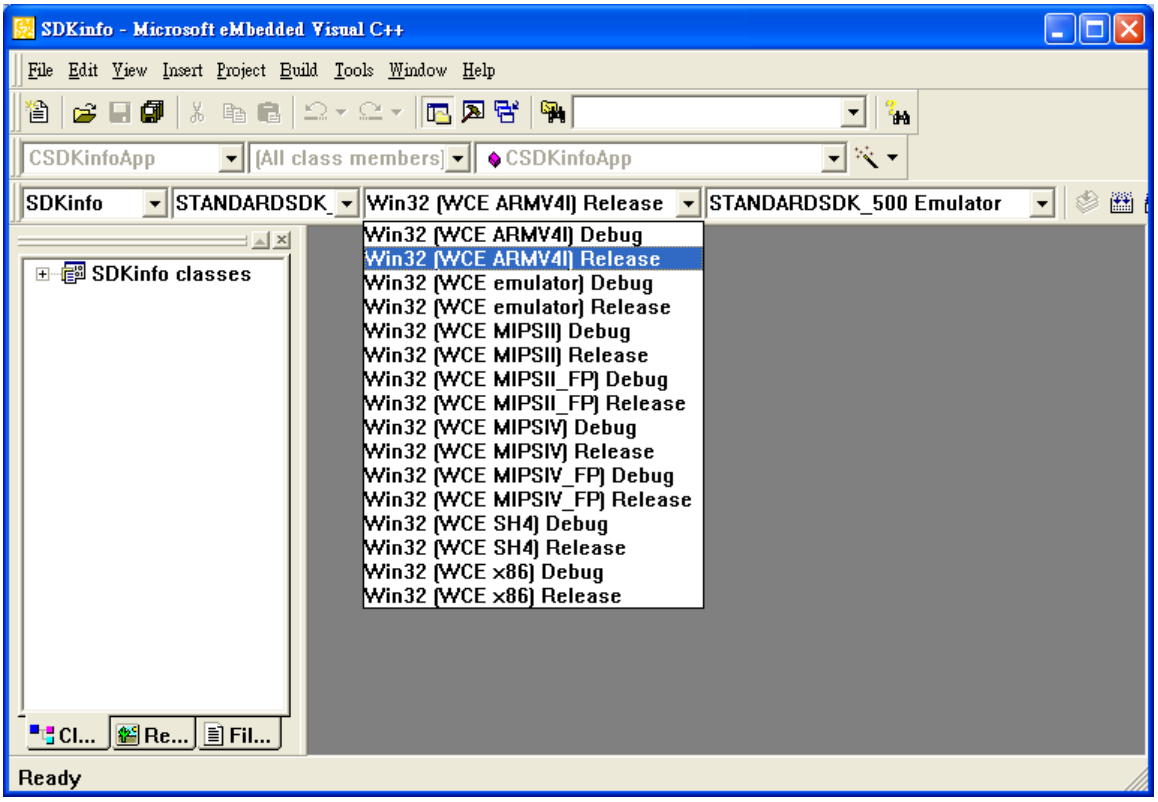

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.3. Specify the path for project reference

Step 1: Click the “Options…” command from the “Tools” menu

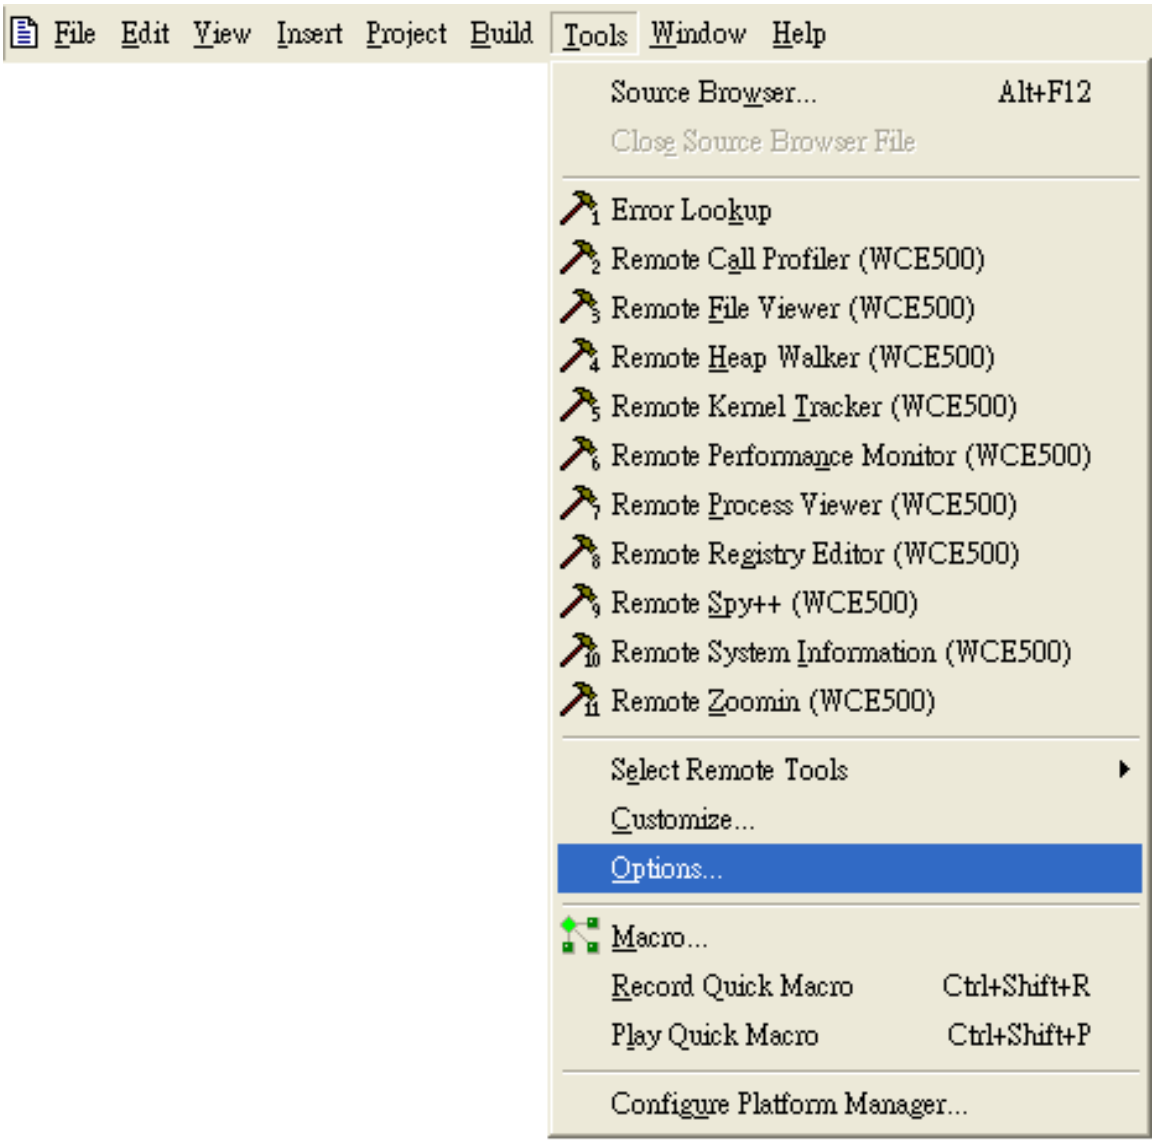

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: In the “Option” dialog, select the “Directories” tab and do the following in this order to specify the header file include path

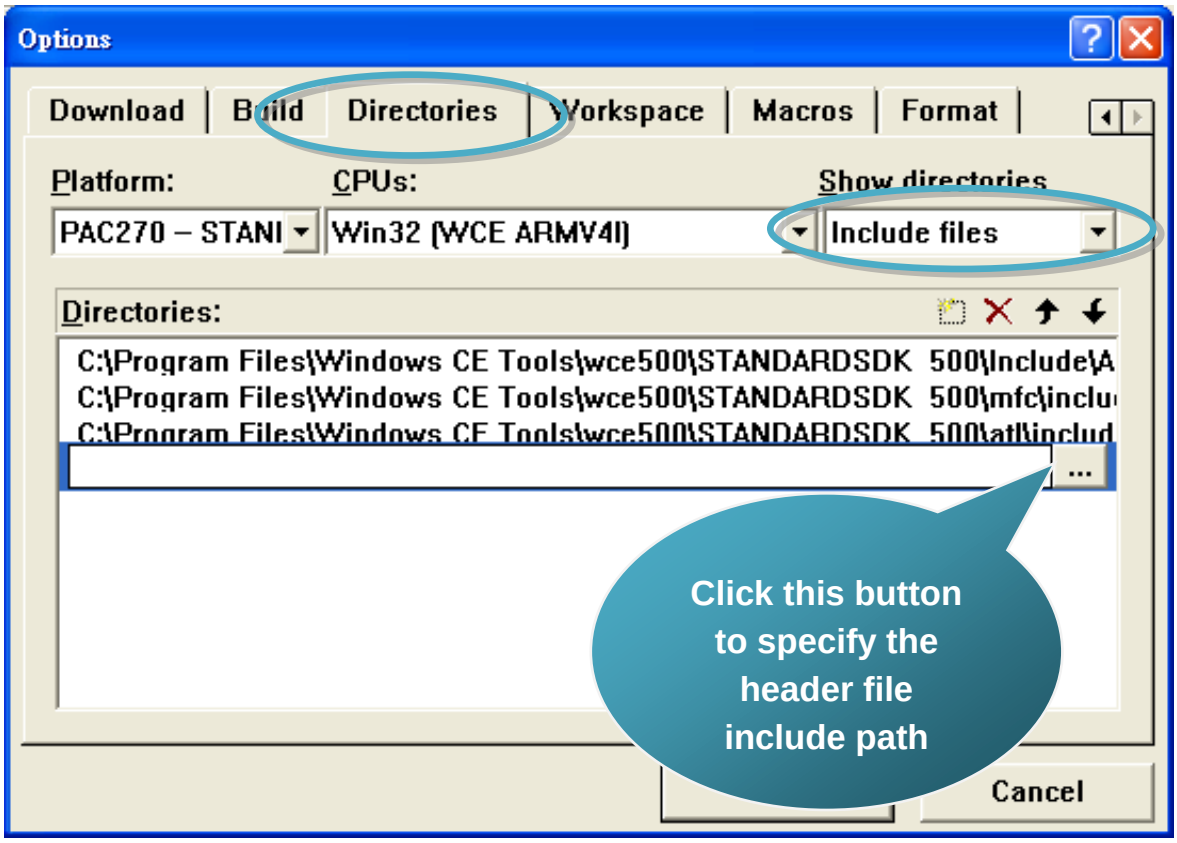

The “Viewpacsdk.h” file can be obtained from:

CD:\Napdos\vp-2000_ce50\SDK\ViewpacSDK\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/sdk/viewpacsdk/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: In the “Option” dialog, select the “Directories” tab and do the following in this order to specify the library file path

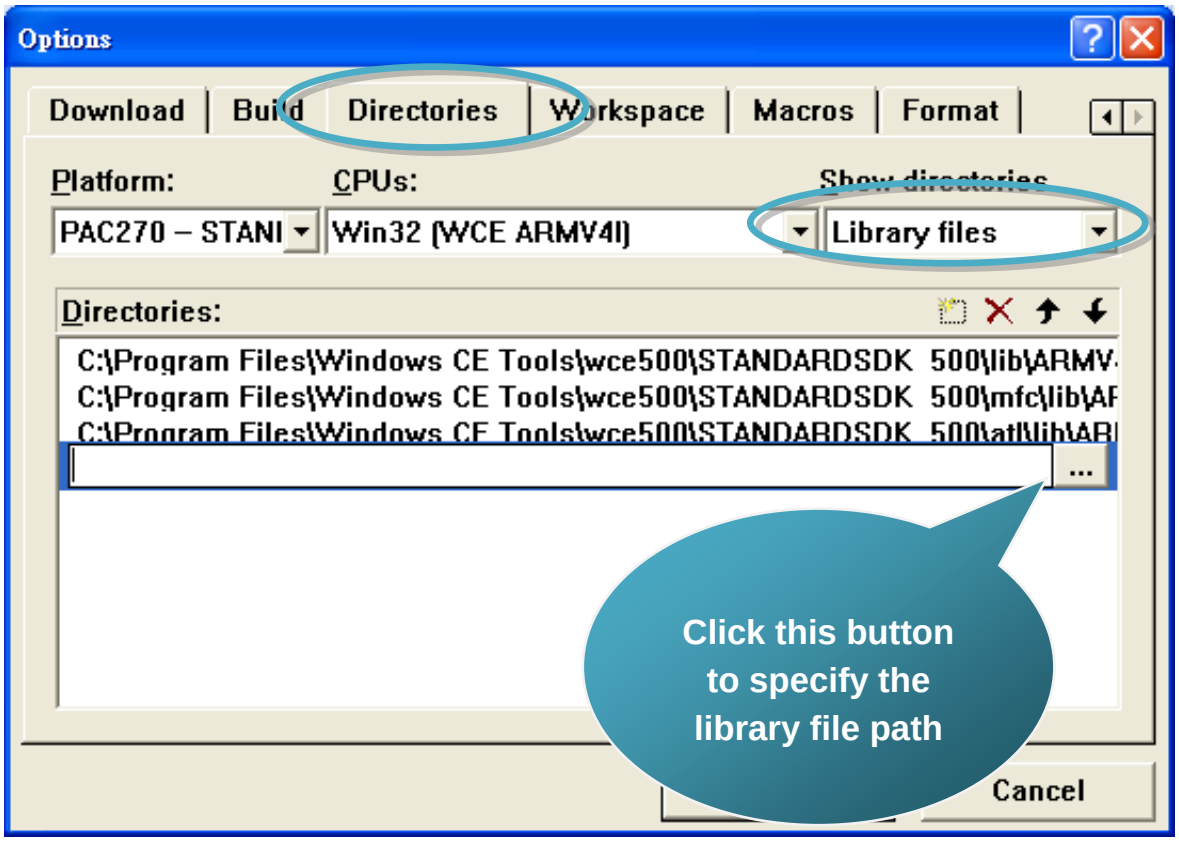

The “ViewPACSDK.lib” file can be obtained from:

CD:\Napdos\vp-2000_ce50\SDK\ViewpacSDK\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/sdk/viewpacsdk/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: Click the “Settings…” command from the “Project” menu

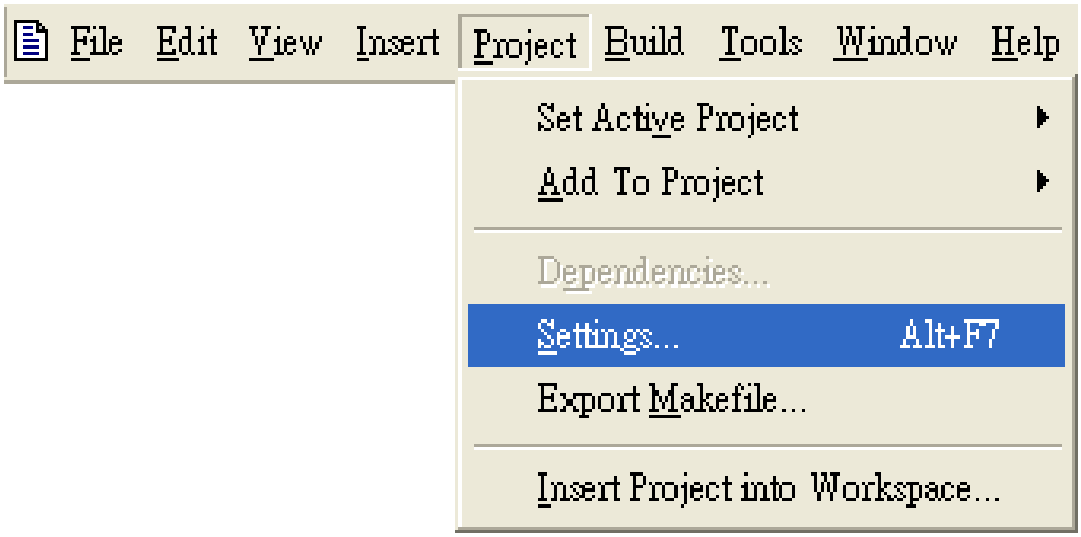

Step 5: In the “Project Settings” dialog box do the following in this order

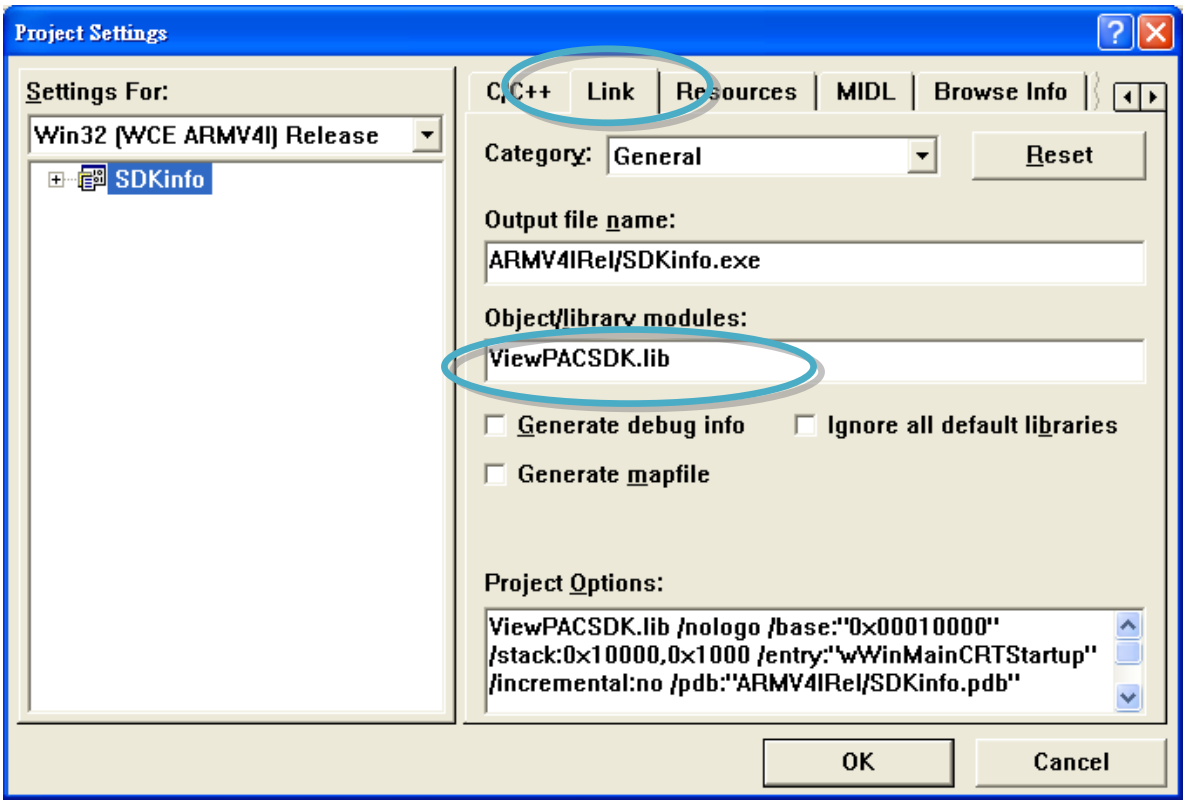

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.4. Design and Build an application program

Step 1: On the “Workspace” window, select the “ResourceView” tab and expand the “dialog” folder, and then double-click the “IDD_DEMO_DIALOG” to open the dialog box

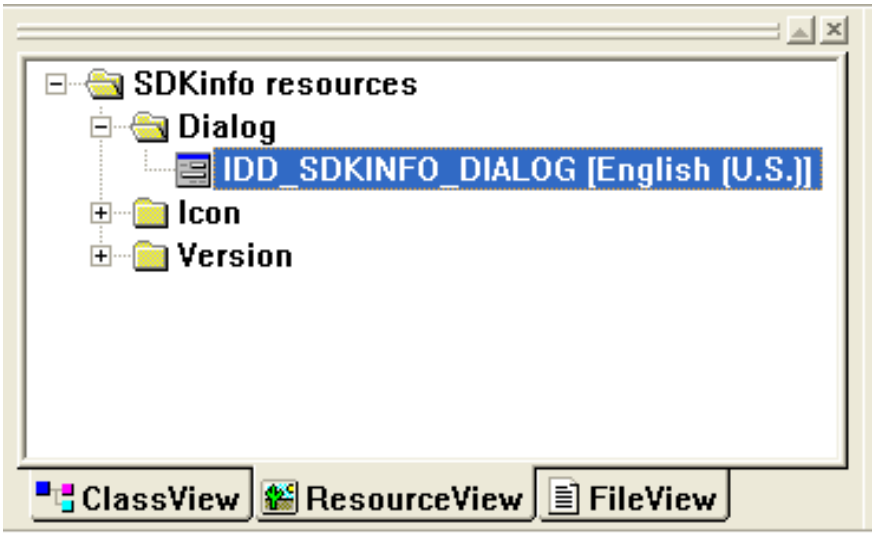

Step 2: Add the “button” object in the “SDKinfo” dialog box

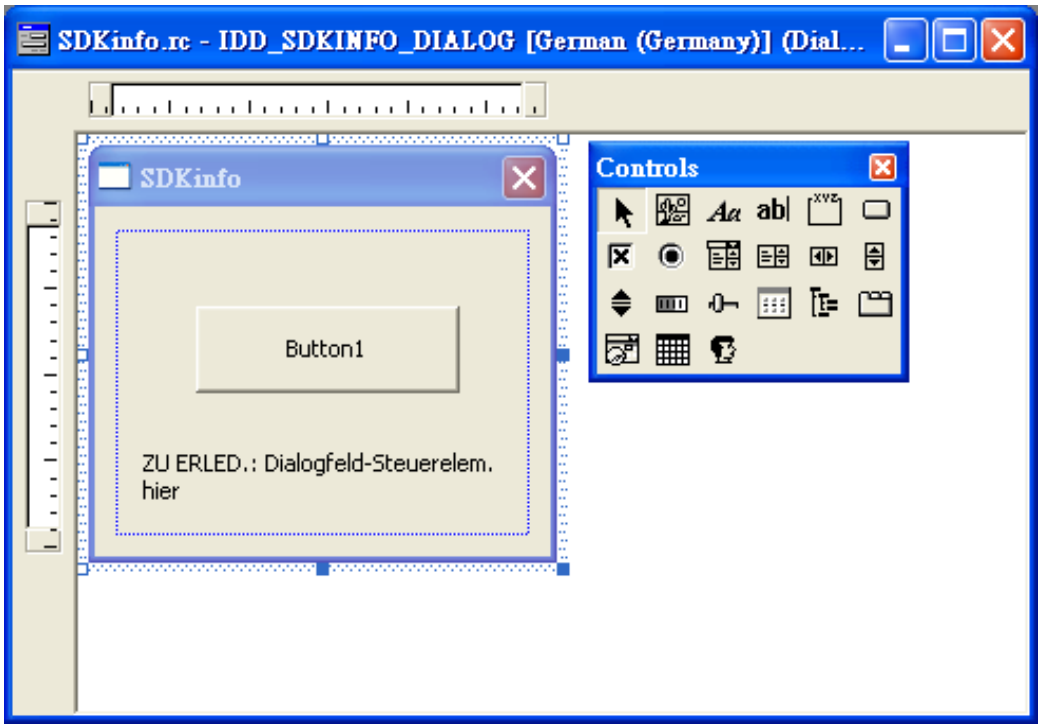

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: In the “SDKinfo” dialog box, right-click the button object and then click the “Properties” command

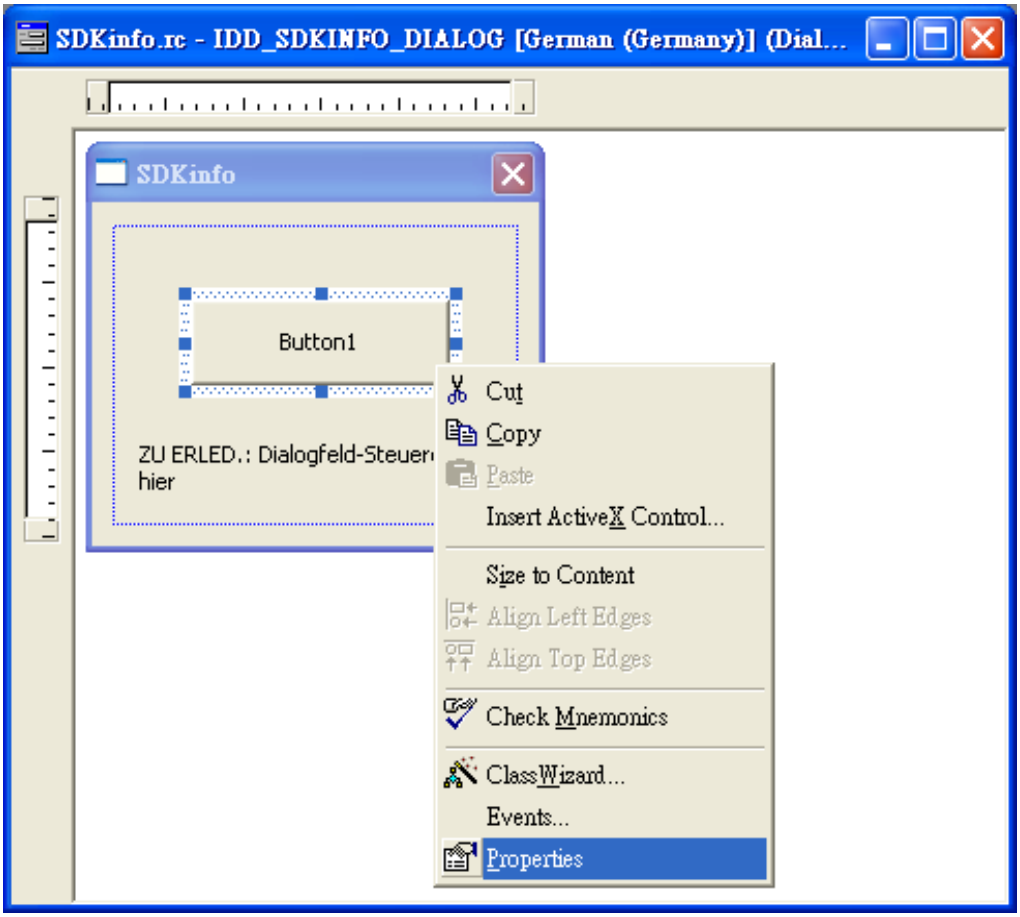

Step 4: Type the “Check the SDK version” in the “Caption” edit box and then click the “close” button

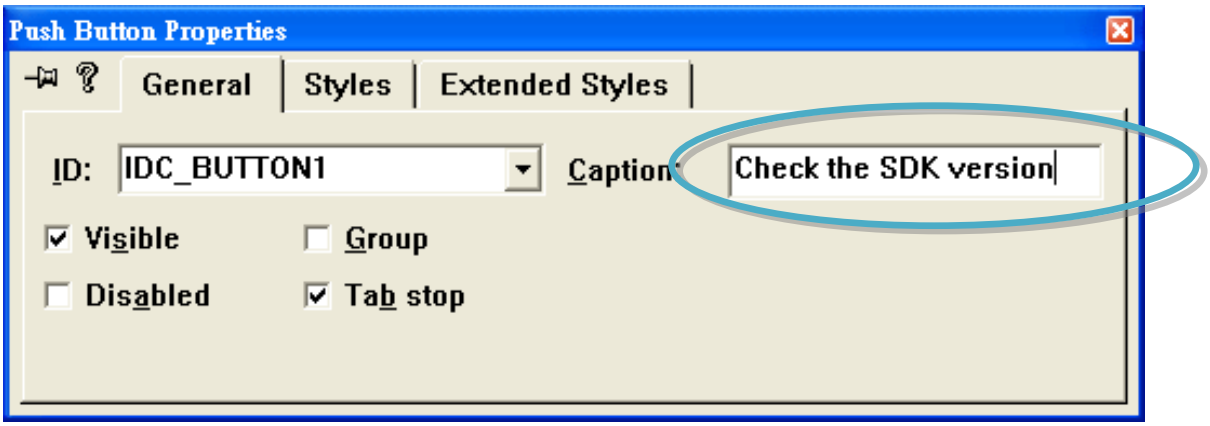

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 5: In the “SDKinfo” dialog box, double-Click the button object

Step 6: Type the “OnBtnCheckSDK” in the “Member function name” edit box and then click the “OK” button

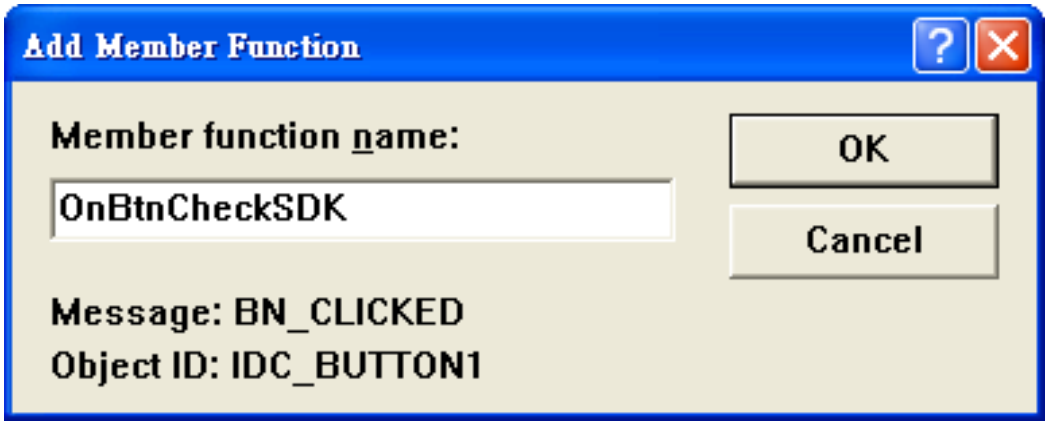

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 7: Insert the following code into the Editor Window

```
char SDK[32];
TCHAR buf[32];
pac_GetVIEWSDKVersion(SDK);
pac_AnsiToWideString(SDK, buf);
MessageBox(buf,NULL,MB_OK);
```

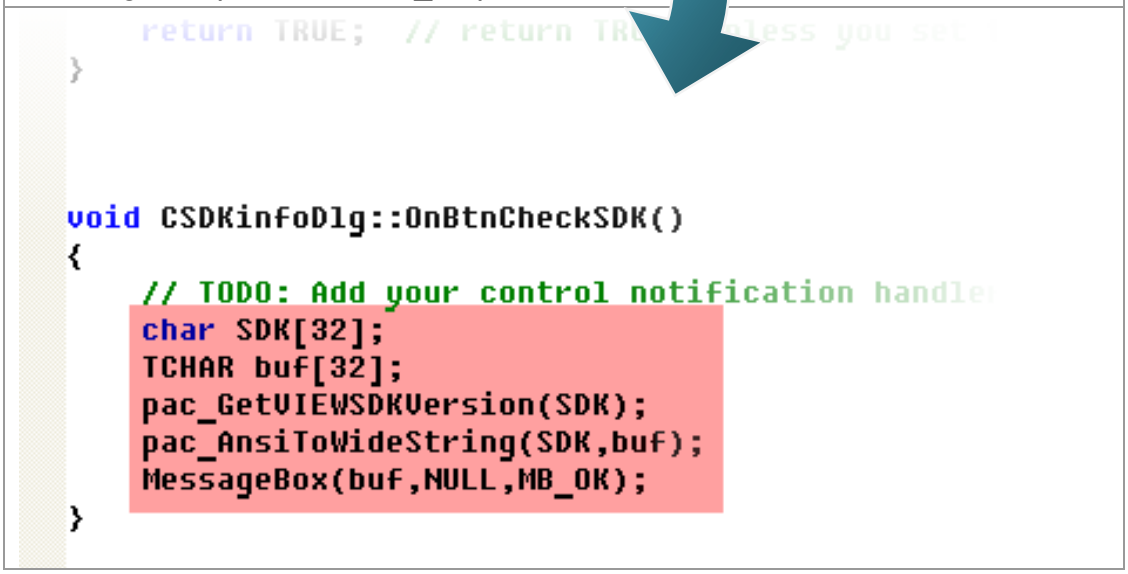

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 8: Insert the “#include “Viewpacsdk.h” and #include “PACSDK.h” into the header area

```
// SDKinfoDlg.cpp : implementation file
//

#include "stdafx.h"
#include "SDKinfo.h"
#include "SDKinfoDlg.h"

#include "Viewpacsdk.h"
#include "PACSDK.h"

#ifdef _DEBUG
#define new DEBUG_NEW
#undef THIS_FILE
static char THIS_FILE[] = __FILE__;
#endif
```


Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

4.6.5. Execute the application program on ViewPAC

Step 1: On the “Build” menu, click the “Build systeminfo.exe” command

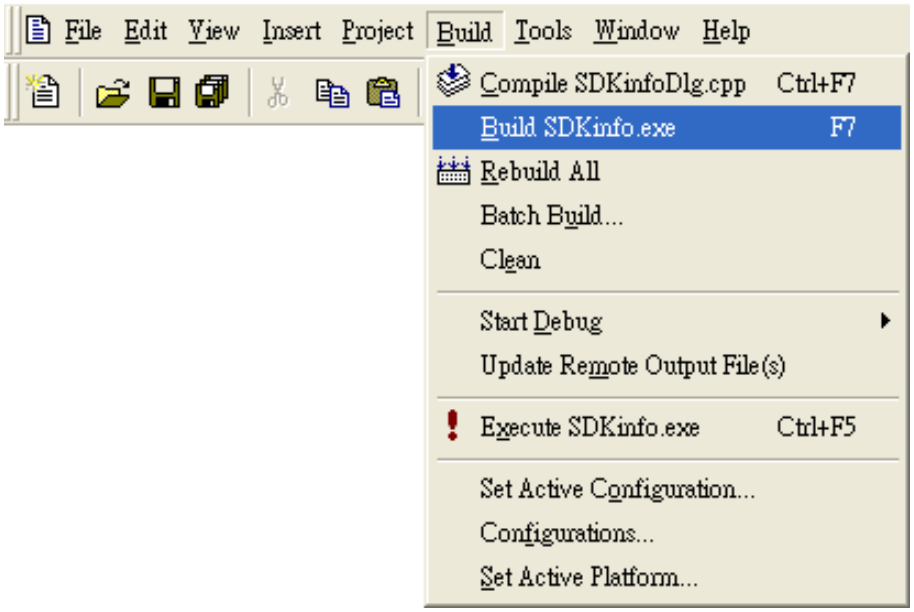

Step 2: Open the web browser and type the IP address to connect the FTP server of ViewPAC

Step 3: Upload the “SDKinfo.exe” application to the ViewPAC via the ViewPAC FTP server

Step 4: On the ViewPAC, execute the uploaded file

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5. APIs and Demo References

This chapter introduces demo programs that have been designed for the ViewPAC. You can examine the demo source code, which includes numerous comments, to familiarize yourself with the ViewPAC API. This will allow developing your own applications quickly by modifying these demo programs. The following details the contents of the ViewPAC demo programs.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.1. Demo programs with C#

The table below describes the ViewPAC demos that have been designed to demonstrate the standard operation features of the ViewPAC.

5.1.1. C# Demo program for WinPAC Standard API

The table below describes the ViewPAC demos that have been designed to demonstrate the standard operation features of the ViewPAC.

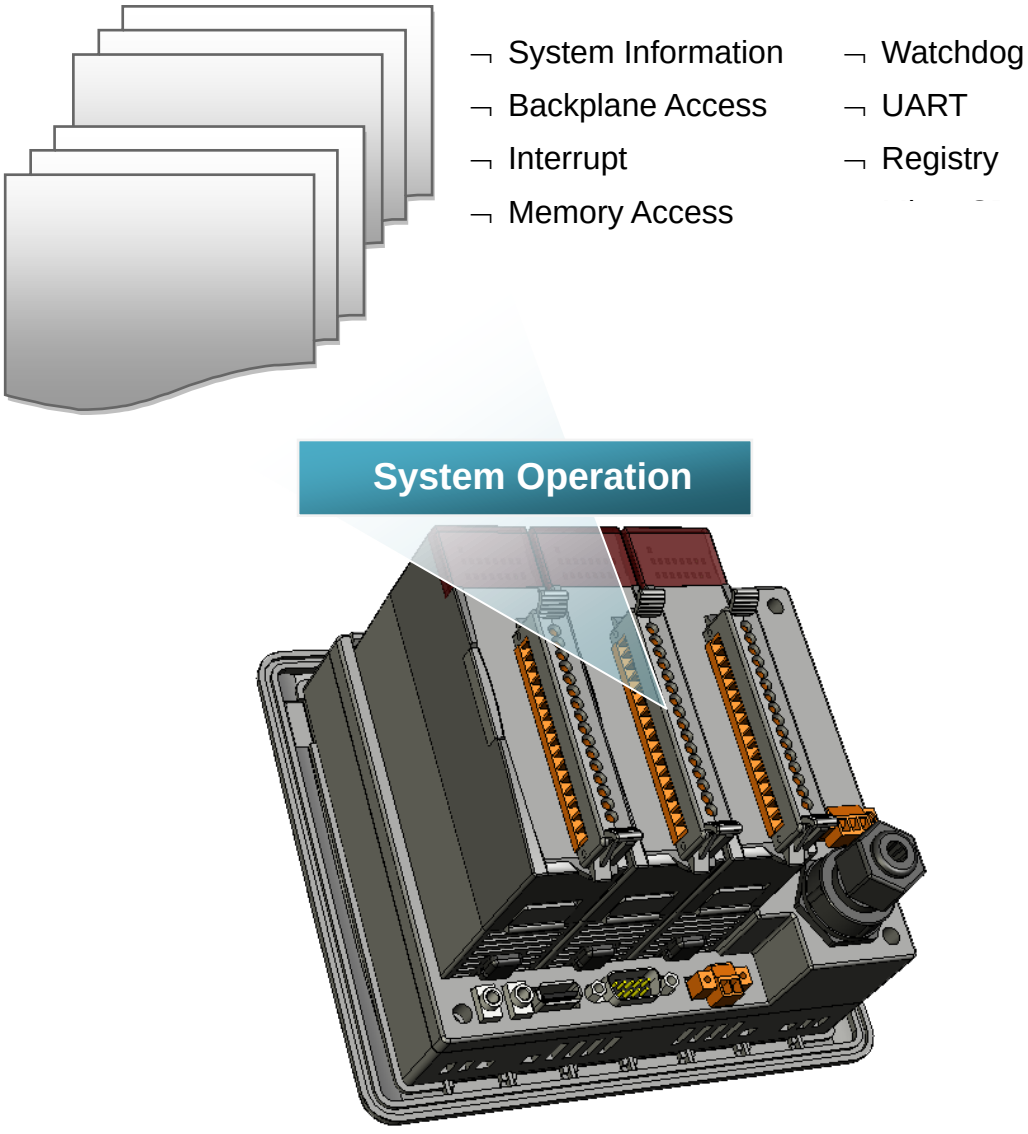

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
system	systeminfo	Retrieves information about the OS version, CPU version, SDK version, etc.
backplane	backplaneinfo	Retrieves information about the DIP switch, backplane ID and slot count.
memoryaccess	memory	Shows how to read/write date values from/to EEPROM
	battery_backup_sram	Shows how to read or write to the battery backup
watchdog	watchdog	Displays how the watchdog operate
microsd	microsd_management	Shows how to enables/disables Micro SD
registry	registry	Shows how to read/write date values from/to registry
UART	diag	Shows how to read the name of local I/O modules via UART

For C# application, these demo programs can be obtained from:

CD:\Napdos\wp-8x4x_ce50\Demo\WinPAC\DotNET\C#.NET\Standard\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/demo/winpac/dotnet/c%23.net/standard/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.1.2. C# Demo program for PAC IO API

The table below describes the ViewPAC demos that have been designed to demonstrate the expansion I/O module features of the ViewPAC.

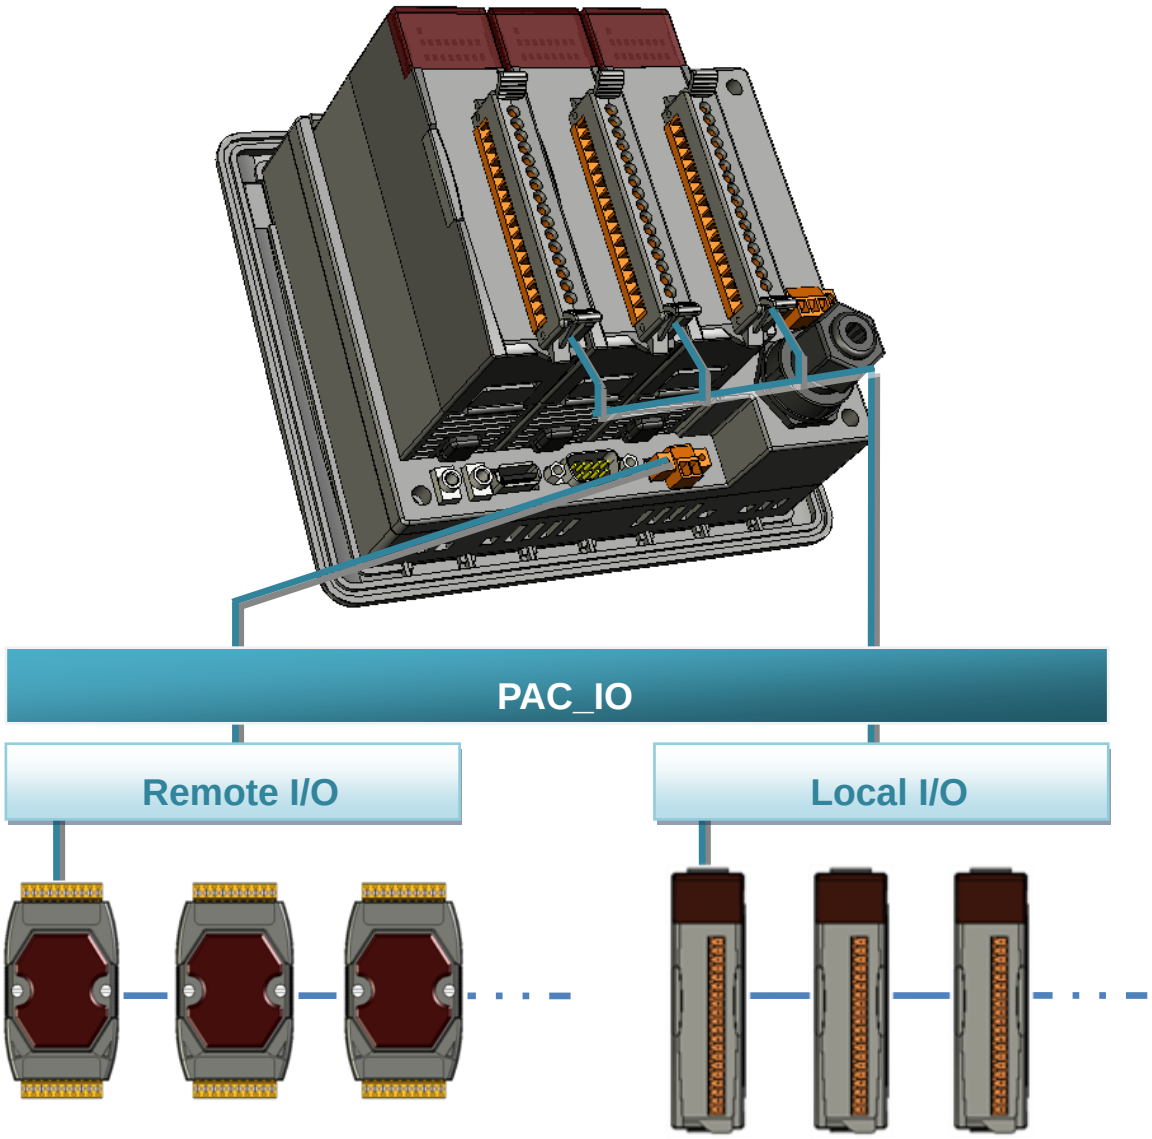

Folder	Demo	Explanation

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
Local	find_io	Shows how to retrieve the module names and types which plugged in the ViewPAC.
	8k_di	Shows how to read the DI values of DI module. This demo program is used by 8K series DI modules.
	8k_do	Shows how to write the DO values to DO module. This demo program is used by 8K series DO modules.
	8k_dio	Shows how to read the DI and the DO values of the DIO module. This demo program is used by 8K series DIO modules.
	87k_basic	Shows how to send/receive a command/response application. This demo program is used by 87K series modules.
	87K_demo	Shows how use UART API and the IO modules located as slots. This demo program is used by 87K series modules.
	87k_ai	Shows how to read the AI values of AI module. This demo program is used by 87K series AI modules.
	87k_ao	Shows how to write the AO values to AO module. This demo program is used by 87K series AO modules.
	87k_di	Shows how to read the DI values of DI module. This demo program is used by 87K series DI modules.
	87k_do	Shows how to write the DO values to DO module. This demo program is used by 87K series DO modules.
	87k_dio	Shows how to read the DI and the DO values of the DIO module. This demo program is used by 87K series DIO modules.
Remote	7k87k_basi	Shows how to send/receive a command/response

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
	c	application. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_ai	Shows how to read the AI values of AI module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_ao	Shows how to write the AO values to AO module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_di	Shows how to read the DI values of DI module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_do	Shows how to write the DO values to DO module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_dio	Shows how to read the DI and the DO values of the DIO module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.

For C# application, these demo programs can be obtained from:

CD:\Napdos\wp-8x4x_ce50\Demo\WinPAC\DotNET\C#.NET\PAC_IO\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/demo/winpac/dotnet/c%23.net/pac_io/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.1.3. C# Demo program for ViewPAC Particular API

The table below describes the ViewPAC demos that have been designed to demonstrate the particular features of the ViewPAC.

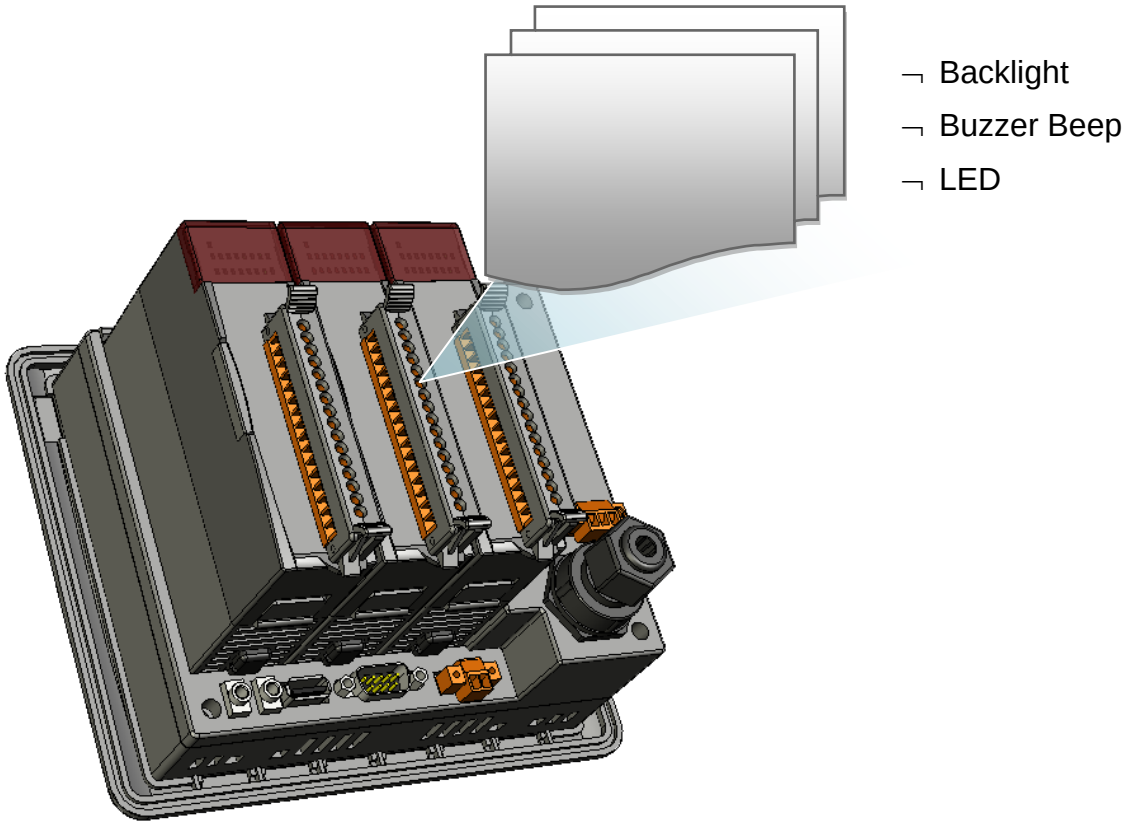

- Backlight
- Buzzer Beep
- LED

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
BuzzerBeep	BuzzerBeep	Shows how to make a simple buzzer beep.
KeyPad	KeyPad	Shows how the KeyPad operates.
LCDBackLight	LCDBackLight	Shows how to control the LCD backlight.
Led	Led	Shows how to control the LEDs.
PlaySound	PlaySound	Shows how to control the microphone-in and earphone-out.

For C# application, these demo programs can be obtained from:

CD:\Napdos\vp-2000_ce50\Demo\ViewPAC\DotNET\C#.NET\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/demo/viewpac/dotnet/c%23.net/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.2. Demo Programs with eMbedded Visual C++

Examples are good way to understand the ViewPAC SDK. The table below describes ViewPAC demos and covers most of the common usages of each ViewPAC API for using eMbedded Visual C++.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.2.1. eVC Demo program for WinPAC Standard API

The table below describes the ViewPAC demos that have been designed to demonstrate the standard operation features of the ViewPAC.

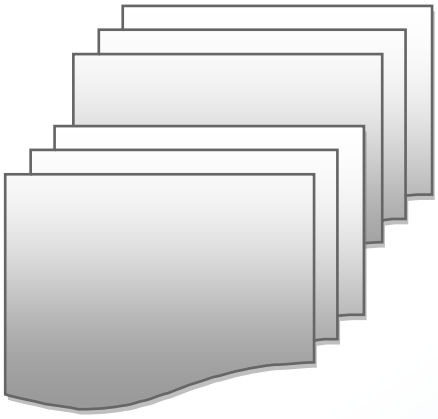

- System Information
- Backplane Access
- Interrupt
- Memory Access
- Watchdog
- UART
- Registry

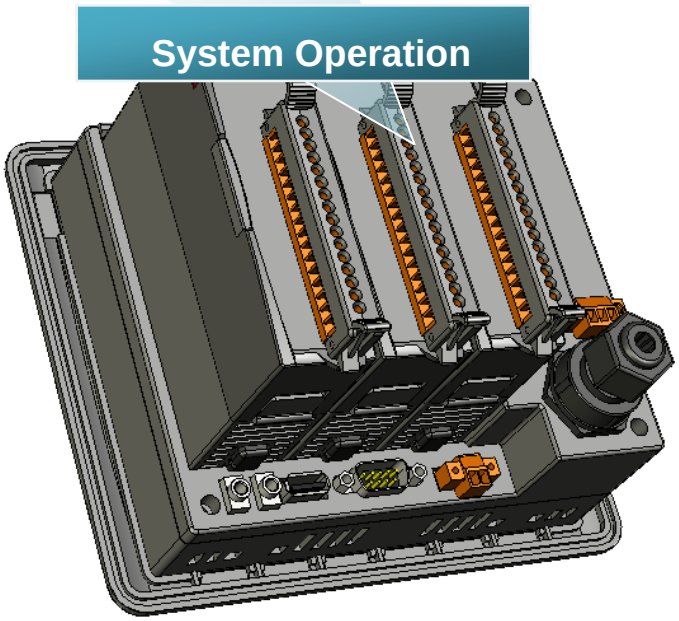

Folder	Demo	Explanation

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
system	systeminfo	Retrieves information about the OS version, CPU version, SDK version, etc.
backplane	backplaneinfo	Retrieves information about the DIP switch, backplane ID and slot count.
memoryaccess	memory	Shows how to read/write date values from/to EEPROM
	battery_backup_sram	Shows how to read or write to the battery backup
watchdog	watchdog	Displays how the watchdog operate
microsd	microsd_management	Shows how to enables/disables Micro SD
registry	registry	Shows how to read/write date values from/to registry
UART	diag	Shows how to read the name of local I/O modules via UART

For C# application, these demo programs can be obtained from:

CD:\Napdos\wp-8x4x_ce50\Demo\WinPAC\DotNET\C#.NET\Standard\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/demo/winpac/dotnet/c%23.net/standard/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.2.2. eVC Demo program for PAC IO API

The table below describes the ViewPAC demos that have been designed to demonstrate the expansion I/O module features of the ViewPAC.

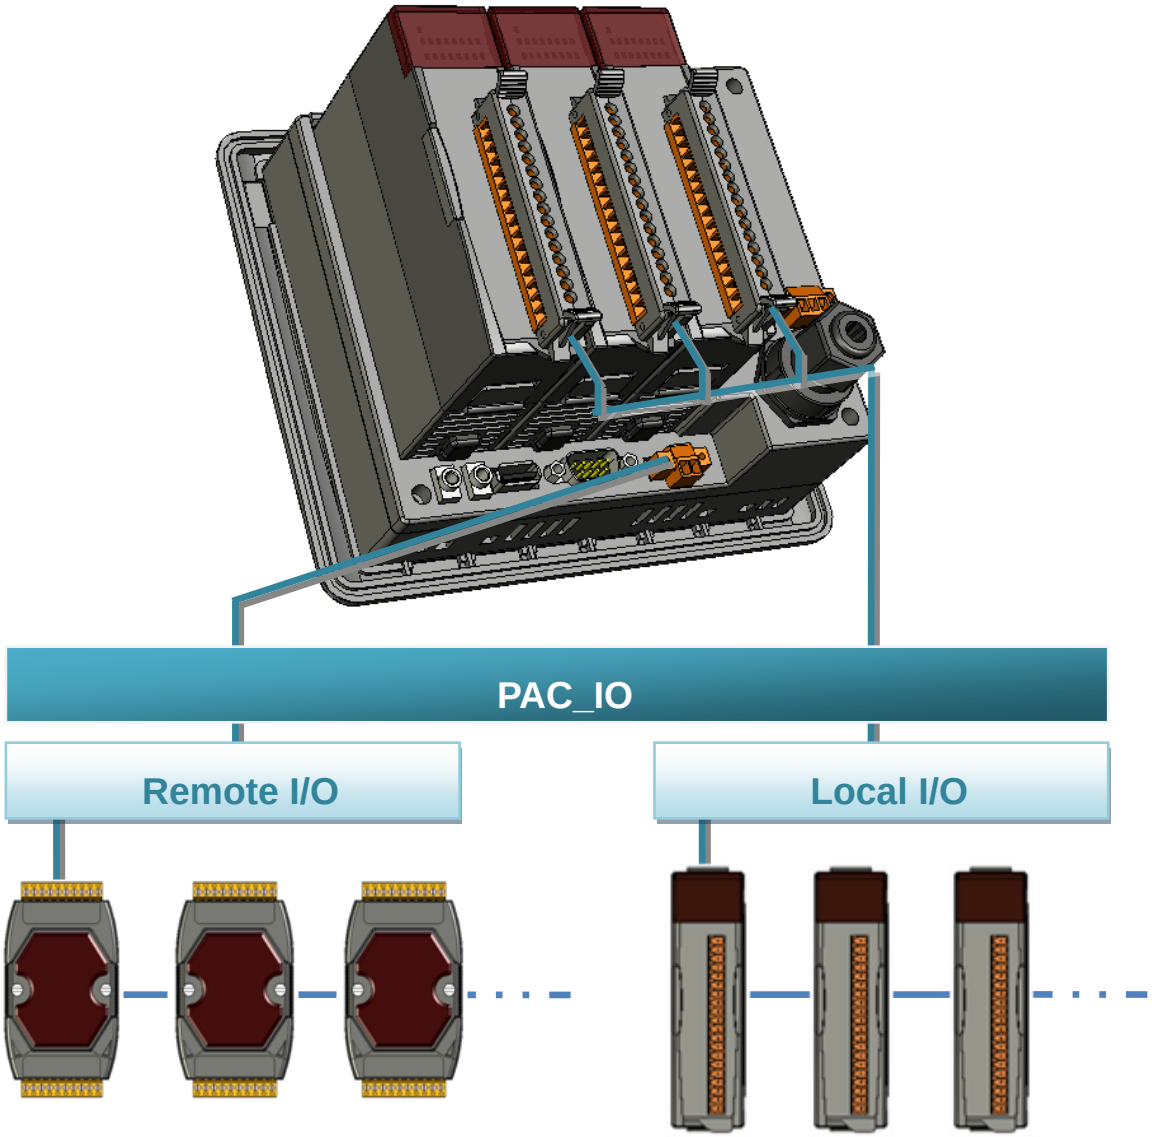

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
Local	find_io	Shows how to retrieve the module names and types which plugged in the ViewPAC.
	8k_di	Shows how to read the DI values of DI module. This demo program is used by 8K series DI modules.
	8k_do	Shows how to write the DO values to DO module. This demo program is used by 8K series DO modules.
	8k_dio	Shows how to read the DI and the DO values of the DIO module. This demo program is used by 8K series DIO modules.
	87k_basic	Shows how to send/receive a command/response application. This demo program is used by 87K series modules.
	87K_demo	Shows how use UART API and the IO modules located as slots. This demo program is used by 87K series modules.
	87k_ai	Shows how to read the AI values of AI module. This demo program is used by 87K series AI modules.
	87k_ao	Shows how to write the AO values to AO module. This demo program is used by 87K series AO modules.
	87k_di	Shows how to read the DI values of DI module. This demo program is used by 87K series DI

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
		modules.
	87k_do	Shows how to write the DO values to DO module. This demo program is used by 87K series DO modules.
	87k_dio	Shows how to read the DI and the DO values of the DIO module. This demo program is used by 87K series DIO modules.
Remote	7k87k_basic	Shows how to send/receive a command/response application. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_ai	Shows how to read the AI values of AI module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_ao	Shows how to write the AO values to AO module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_di	Shows how to read the DI values of DI module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_do	Shows how to write the DO values to DO module. This demo program is used by 7K or 87K series AI modules which connected through a COM port.
	7k87k_dio	Shows how to read the DI and the DO values of the DIO module.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
		This demo program is used by 7K or 87K series AI modules which connected through a COM port.

For C# application, these demo programs can be obtained from:

CD:\Napdos\wp-8x4x_ce50\Demo\WinPAC\DotNET\C#.NET\PAC_IO\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/demo/winpac/dotnet/c%23.net/pac_io/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

5.2.3. eVC Demo program for ViewPAC Particular API

The table below describes the ViewPAC demos that have been designed to demonstrate the particular features of the ViewPAC.

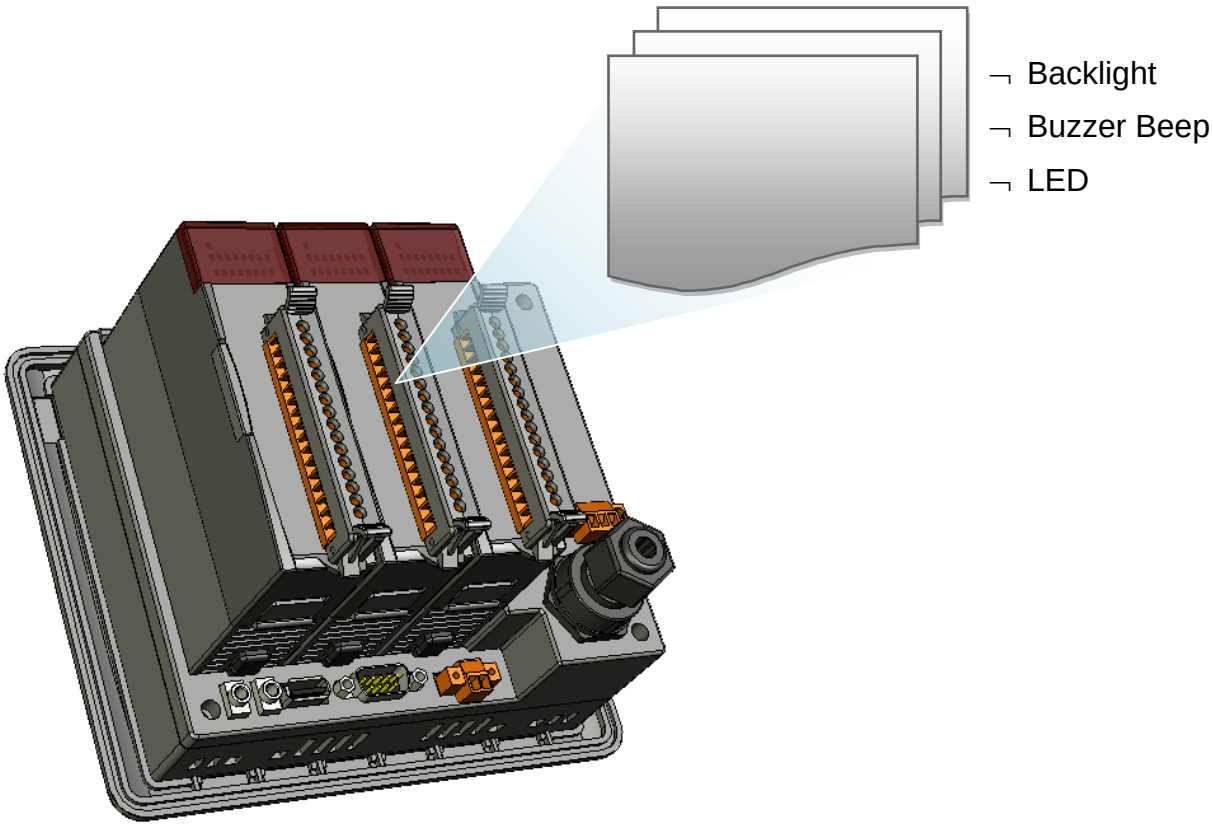

Folder	Demo	Explanation

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Folder	Demo	Explanation
BuzzerBeep	BuzzerBeep	Shows how to make a simple buzzer beep.
KeyPad	KeyPad	Shows how the KeyPad operate.
LCDBackLight	LCDBackLight	Shows how to control the LCD backlight.
Led	Led	Shows how to control the LEDs.
PlaySound	PlaySound	Shows how to control the microphone-in and earphone-out.

For C# application, these demo programs can be obtained from:

CD:\Napdos\vp-2000_ce50\Demo\ViewPAC\DotNET\C#.NET\

ftp://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/demo/viewpac/dotnet/c%23.net/

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6. ViewPAC Updates

This chapter provides instructions on how to upgrade ViewPAC OS and SDK.

ICP DAS will continue to add additional features to ViewPAC SDK and OS in the future, so we advise you to periodically check the ICP DAS web site for the latest updates.

ViewPAC updates services can be divided into the following two main categories:

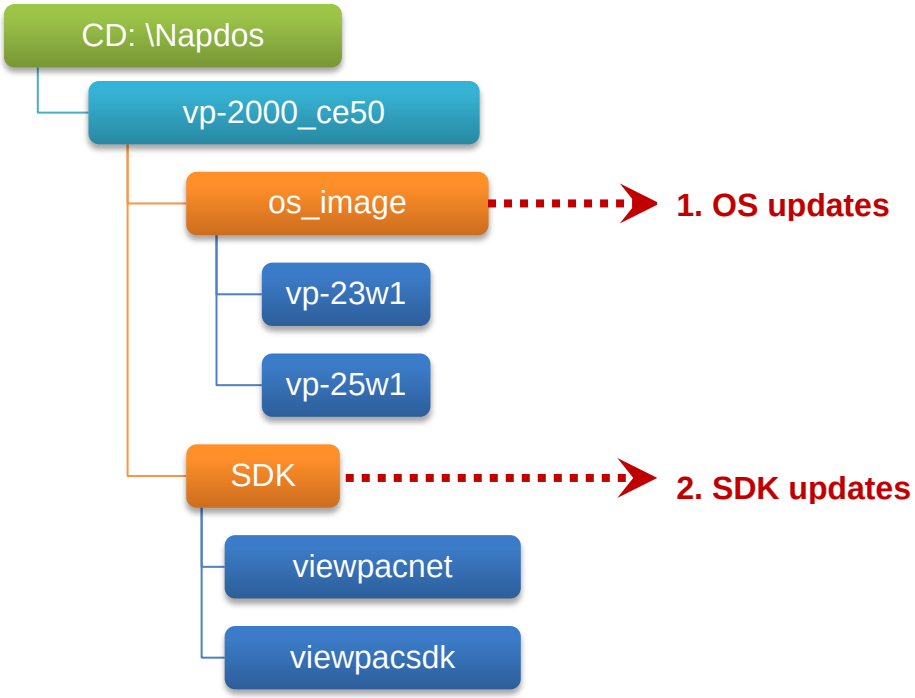

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.1. OS updates

The updates files of OS image are located on:

VP-23W1:

CD:\Napdos\vp-2000_ce50\OS_image\vp-23w1\

VP-25W1:

CD:\Napdos\vp-2000_ce50\OS_image\vp-25w1\

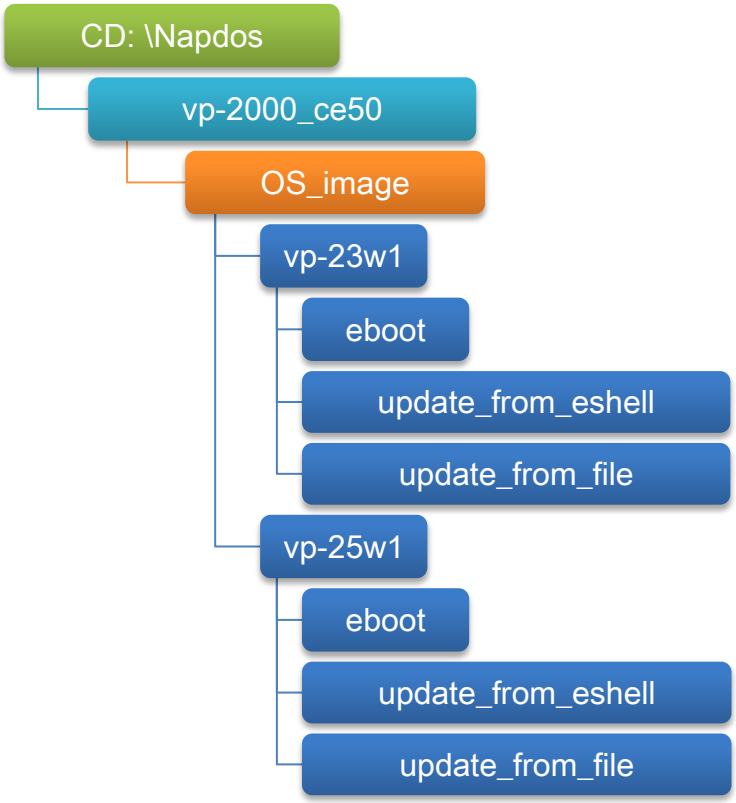

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

There are two different ways of ViewPAC OS image updates:

i. ViewPAC OS updates from file

(We recommend that you use this method for quick and easy to update ViewPAC OS image)

ii. ViewPAC OS updates from eshell

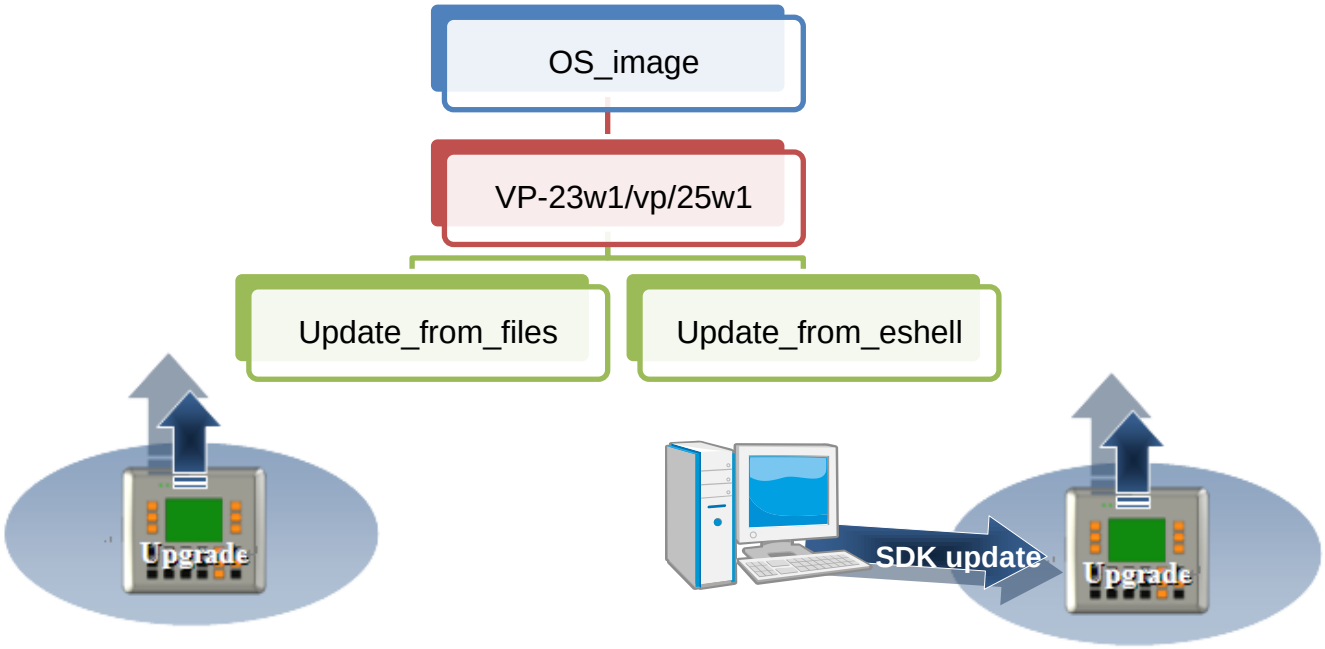

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The ViewPAC OS supports multi-language:

i. en- English

ii. sc- Simplified Chinese

iii. tc- Traditional Chinese

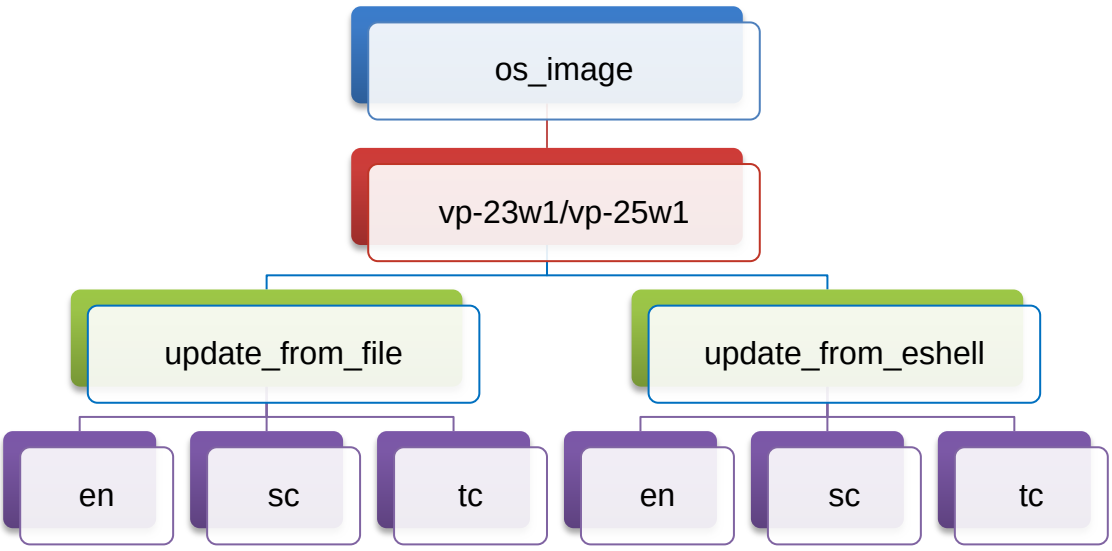

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.1.1. Updating the Boot Loader and the ViewPAC OS image from files

There are two different ways of ViewPAC OS image update:

i. ViewPAC OS updates from files (Please refer to this section)

We recommend that you use this method for quick and easy to update the ViewPAC OS image

ii. ViewPAC OS updates from eshell tool (Please refer to section “6.1.2. Updating the ViewPAC OS image from eshell”)

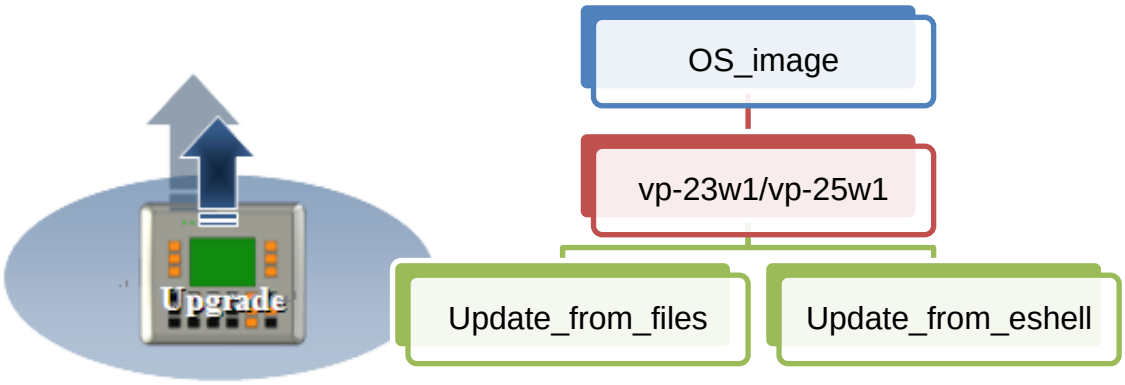

Step 1: Get the latest version of the execute file and the corresponding “autoinit.bat” file and run it on the ViewPAC side

Each folder contains an execute file and a corresponding “autoinit.bat” file.

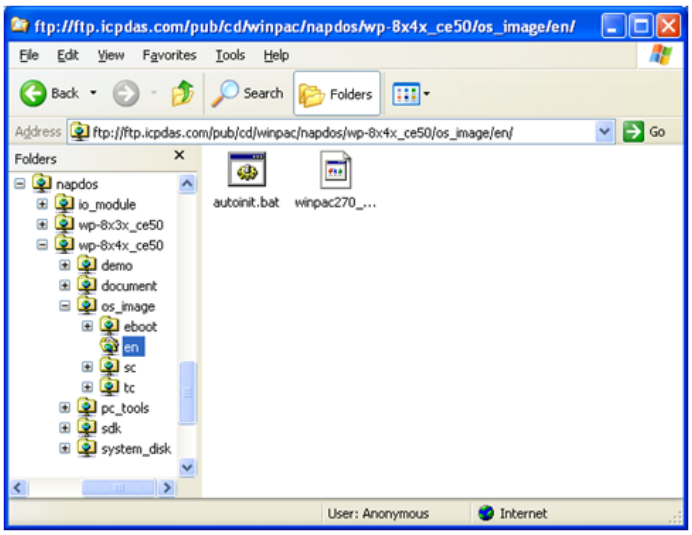

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: Get the latest version of the installation package and download it to ViewPAC, then execute it

For VP23W1:

The latest version of the installation package can be obtained from:

CD:\Napdos\vp-2000_ce50\os_image\vp-23w1\update_from_file\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/os_image/vp-23w1/update_from_file/

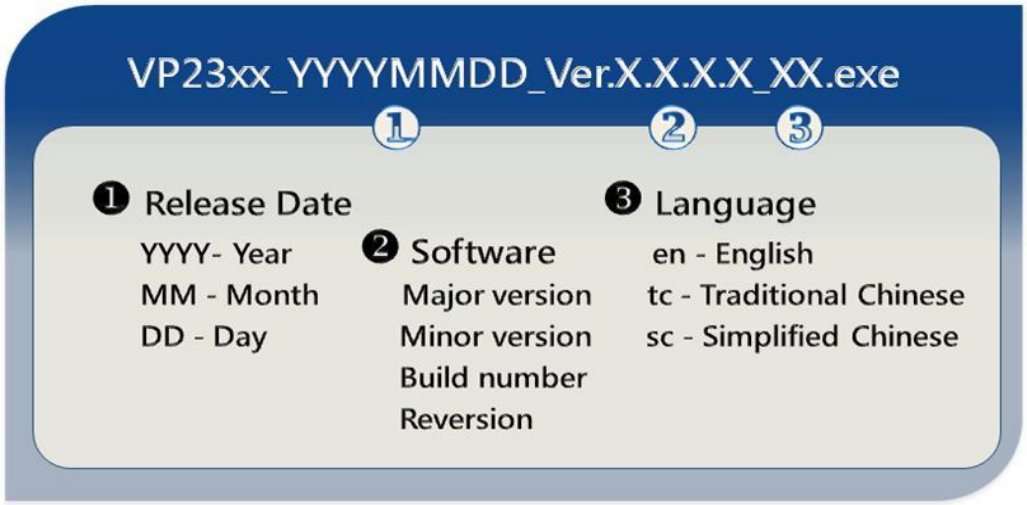

For VP25W1:

The latest version of the installation package can be obtained from:

CD:\Napdos\vp-2000_ce50\os_image\vp-25w1\update_from_file\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/os_image/vp-25w1/update_from_file/

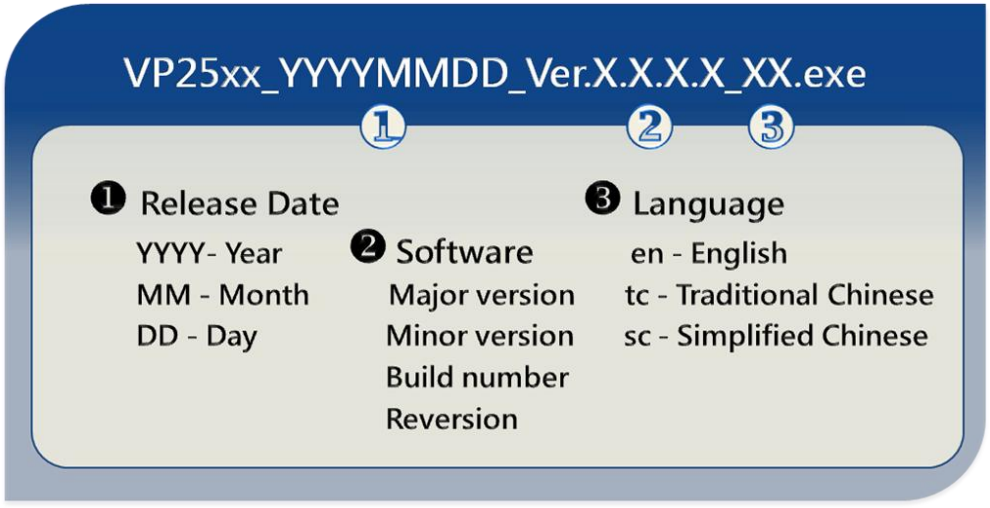

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

There are several ways to download the installation package to ViewPAC:

- On the ViewPAC, you can download the installation package via an Ethernet connection.
- On the host PC, you can download the installation package to ViewPAC via a USB storage device, the removable Micro SD card or FTP server.

The latest version of the ViewPAC OS image file can be obtained from:

CD:\Napdos\wp-8x4x_ce50\OS_image\update_from_file\

http://www.icpdas.com/products/PAC/ViewPAC/download/ViewPAC_8000/download_os_images.htm

Step 3: After execute the installation package, the "Warning !" dialog will display, then click the "OK" button to start the update instructions

Step 4: On the main dialog, click the "Update Now" button

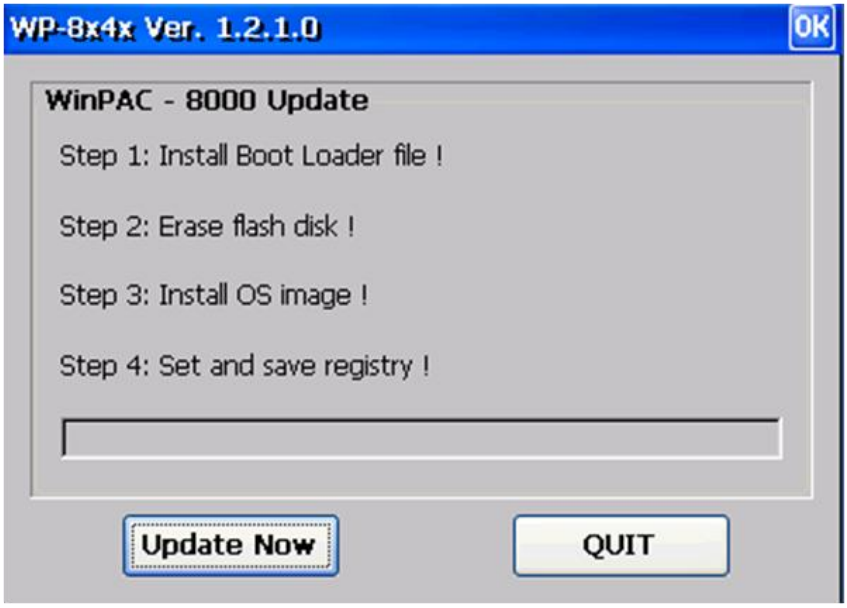
WP-8x4x Ver. 1.2.1.0
OK
WinPAC - 8000 Update
Step 1: Install Boot Loader file !
Step 2: Erase flash disk !
Step 3: Install OS image !
Step 4: Set and save registry !
Update Now
QUIT

Step 5: On the "Warning !" dialog, click the "Yes" button

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

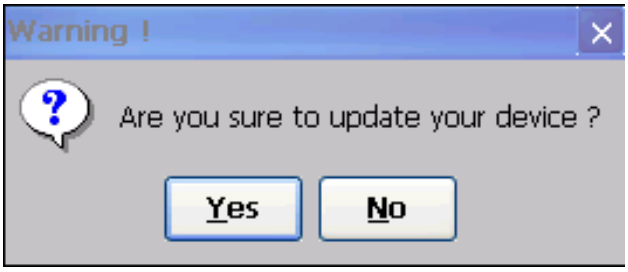

Step 6: On the main dialog, click the “Update Now” button to start installation

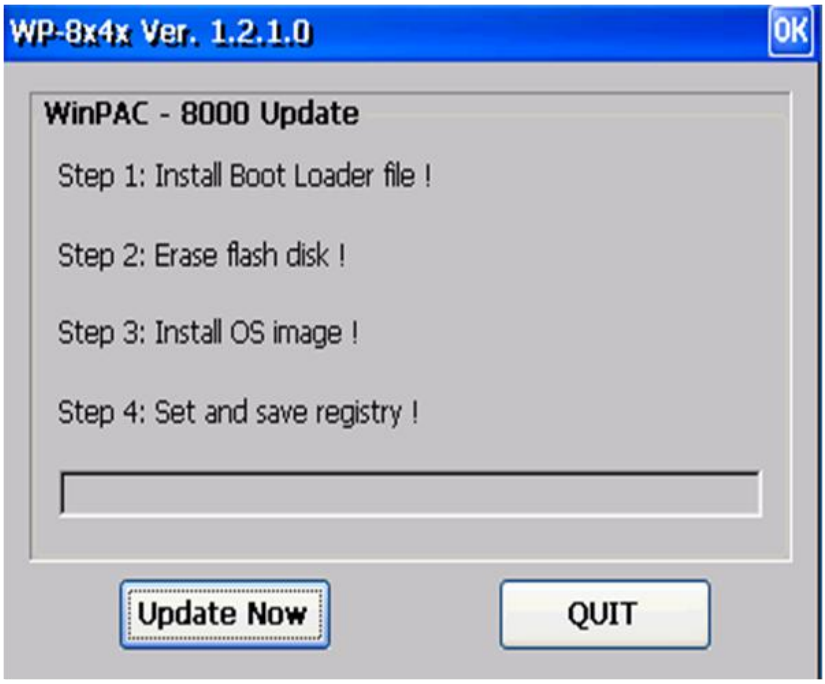
WP-8x4x Ver. 1.2.1.0
OK
WinPAC - 8000 Update
Step 1: Install Boot Loader file !
Step 2: Erase flash disk !
Step 3: Install OS image !
Step 4: Set and save registry !
Update Now
QUIT

Tips & Warnings

Please never turn the ViewPAC off during OS load. Besides we recommend you turn off all other application before updating.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

The installation will perform the following tasks:

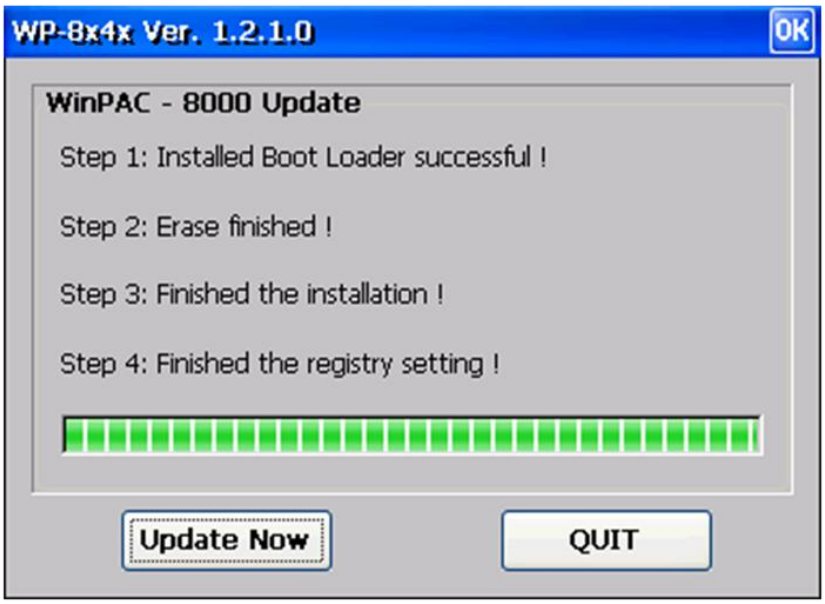
WP-8x4x Ver. 1.2.1.0
OK
WinPAC - 8000 Update
Step 1: Installed Boot Loader successful !
Step 2: Erase finished !
Step 3: Finished the installation !
Step 4: Finished the registry setting !
Update Now
QUIT

i. Install Boot Loader file

Important Warning

Be careful, if the boot loader broken off in this step and cannot restart in safe mode, you have to send it back to us.

ii. Erase flash disk

iii. Install OS image

iv. Set registry settings to default

Tips & Warnings

This step will reset the registry settings to default, all of your before settings will lost.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 7: After completing the above-mentioned tasks, the “Warning !” dialog will appear as follow, after clicking “OK” button to finish updating OS image, be sure the ViewPAC at normal mode

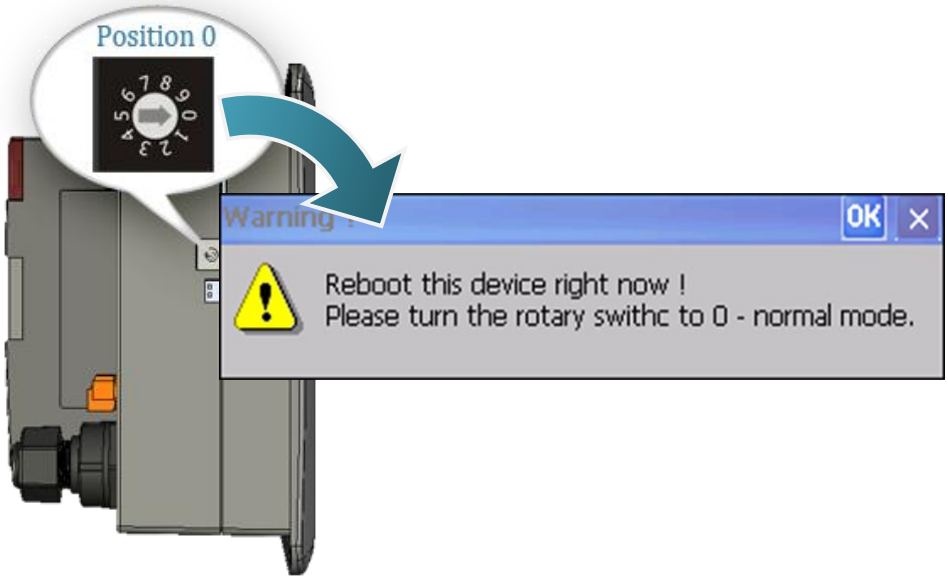

Step 8: Check the ViewPAC OS version

Start the ViewPAC_Utility, and then select the “System Information” tab to check the current OS version.

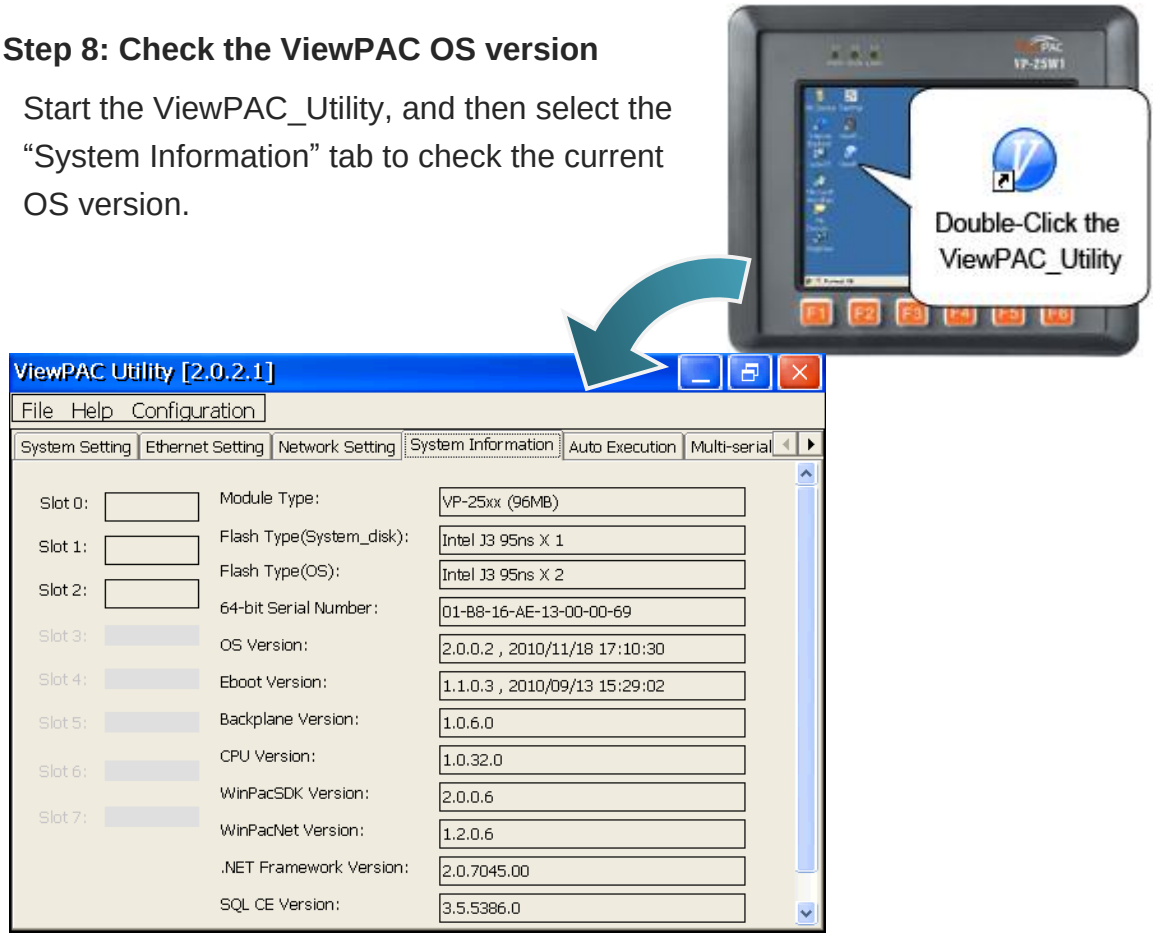

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.1.2. Updating the ViewPAC OS image from eshell

There are two different ways of ViewPAC OS image update:

i. ViewPAC OS updates from files (Please refer to this section)

We recommend that you use this method for quick and easy to update the ViewPAC OS image

ii. ViewPAC OS updates from eshell tool (Please refer to section “6.1.2. Updating the ViewPAC OS image from eshell”)

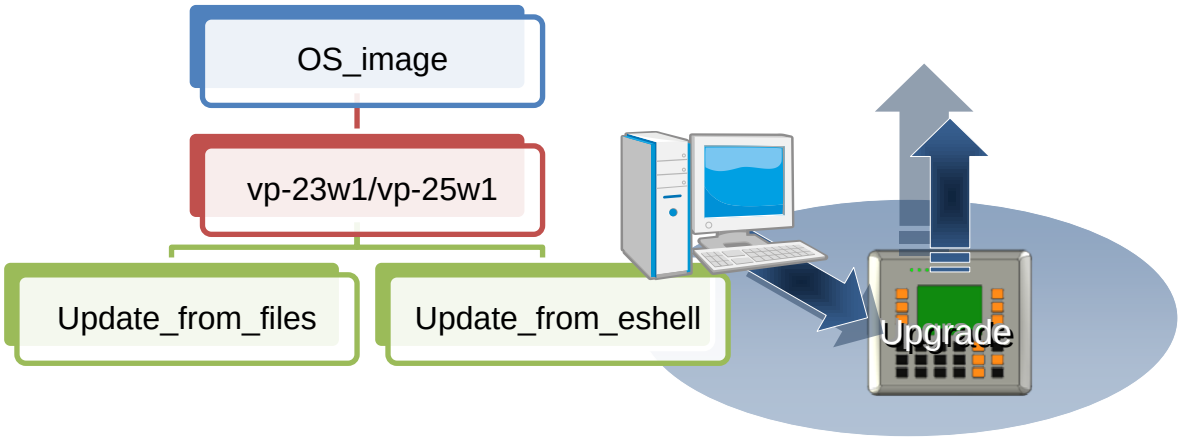

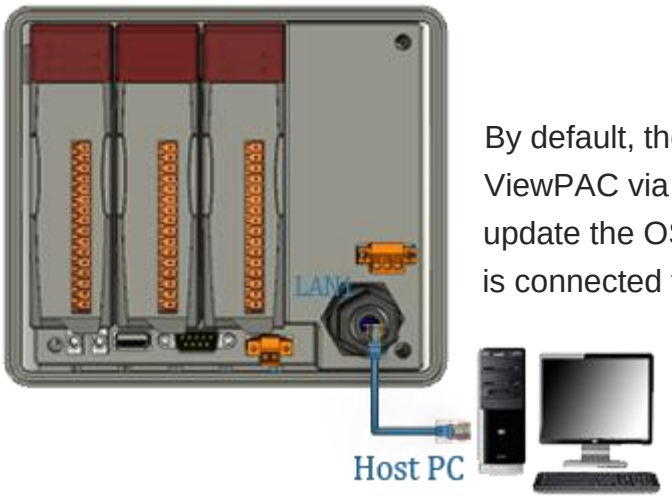

By default, the OS update from Host PC to ViewPAC via Ethernet. Therefore, to update the OS image, make sure Ethernet is connected to the PC.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 1: Get the latest version of the ViewPAC OS image

For VP23W1:

The latest version of the installation package can be obtained from:

CD:\Napdos\vp-2000_ce50\os_image\vp-23w1\update_from_Eshell\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/os_image/vp-23w1/update_from_Eshell/

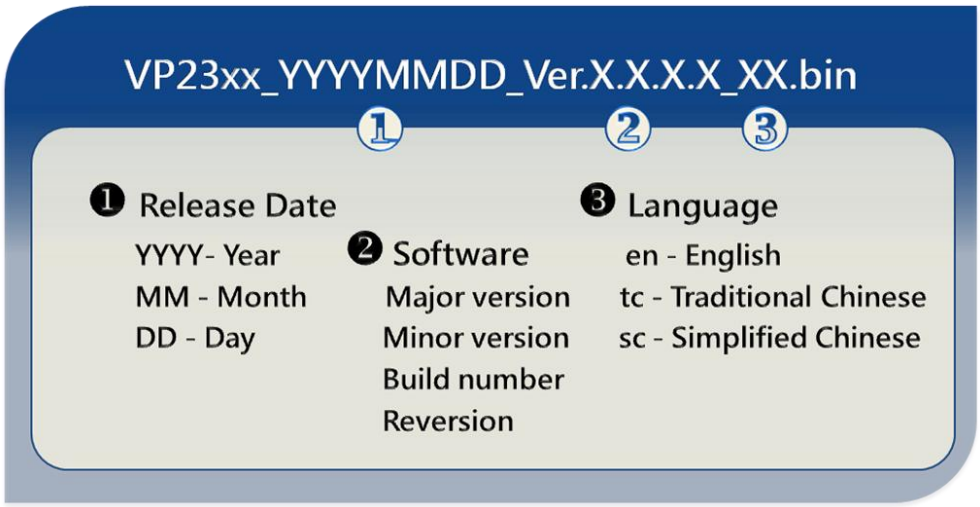

For VP25W1:

The latest version of the installation package can be obtained from:

CD:\Napdos\vp-2000_ce50\os_image\vp-25w1\update_from_Eshell\

http://ftp.icpdas.com/pub/cd/winpac/napdos/vp-2000_ce50/os_image/vp-25w1/update_from_Eshell/

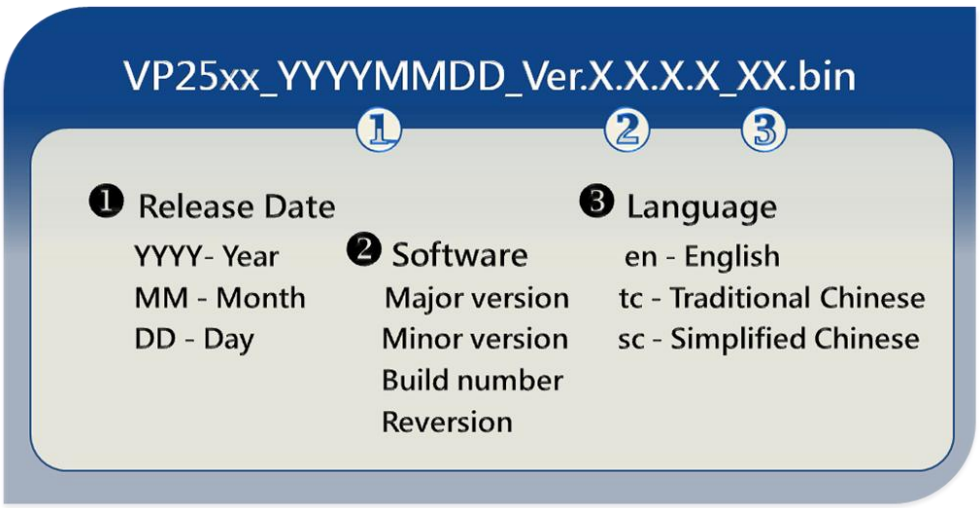

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: Run the ESHELL software on the Host PC

ESHELL you can be obtained at:

CD:\Napdos\wp-8x4x_ce50\PC_Tools\Eshell\

ftp://ftp.icpdas.com/pub/cd/ViewPAC/napdos/wp-8x4x_ce50/pc_tools/eshell/

Step 3: Reboot the ViewPAC at update OS mode

Turn the rotary switch to “3”, and then reboot the ViewPAC.

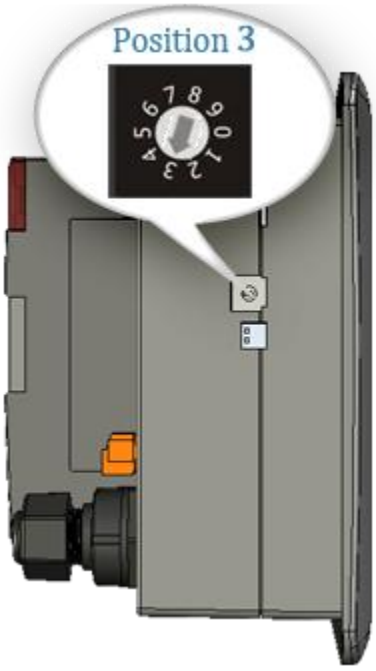

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: Select the device which you want to update the OS image

After starting the ESHELL software, the “Select Device” dialog will appear, then select the device which you want.

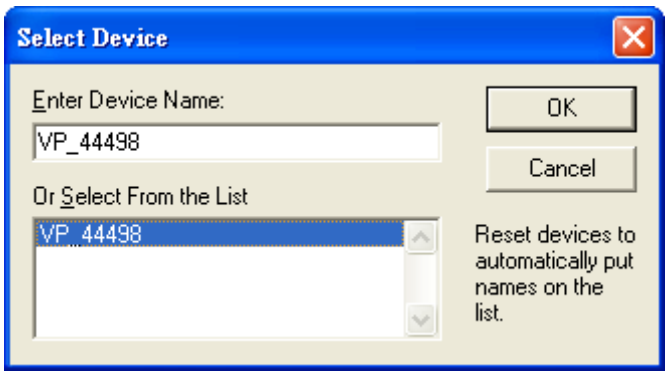

Step 5: Select the latest version of the OS image

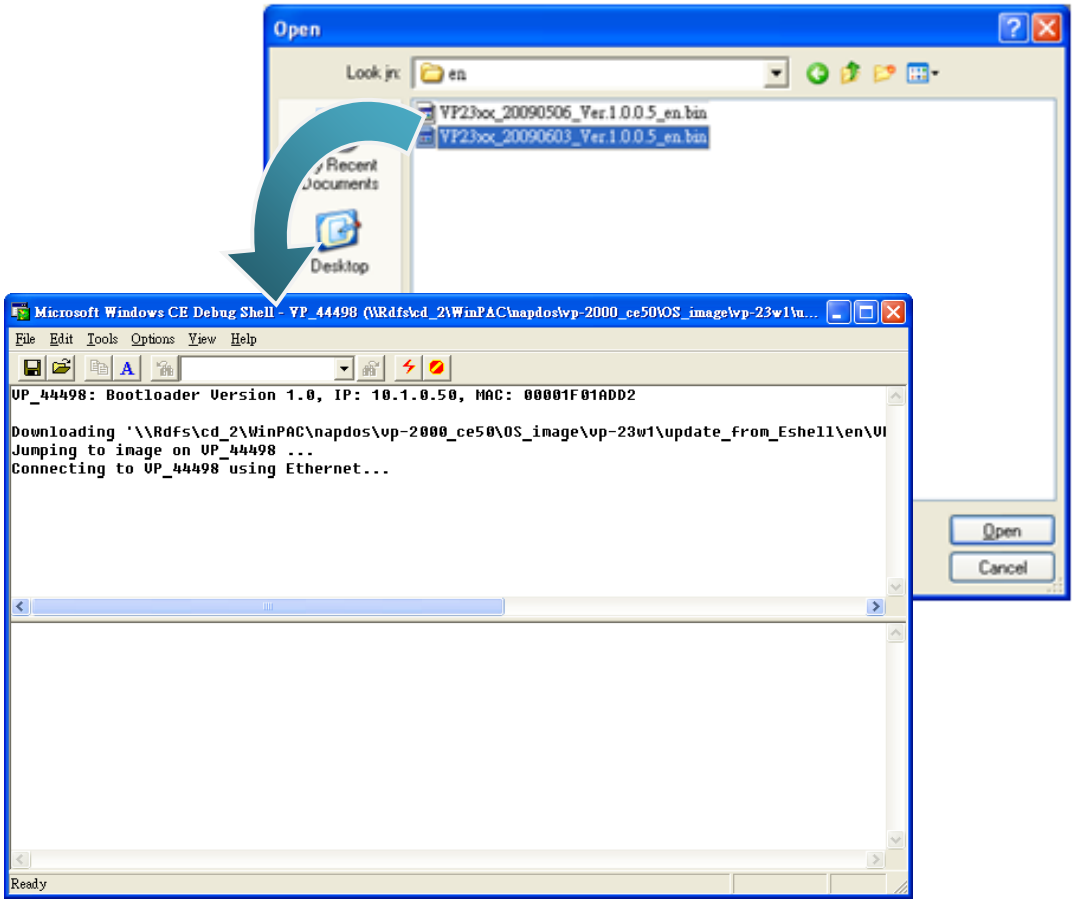

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 6: Once the procedure is completed, the "Warning !" dialog box will Appear on ViewPAC screen as below shown, before clicking the "Yes" button, you must first turn the rotary switch to the "0" position

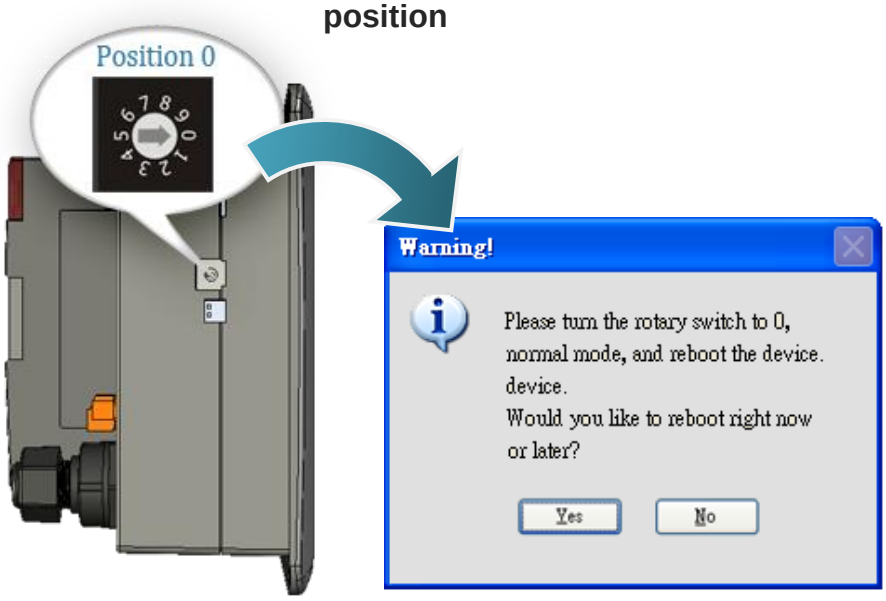
Position 0
Warning!
Please turn the rotary switch to 0, normal mode, and reboot the device.
device.
Would you like to reboot right now or later?
Yes
No

Step 7: Check the ViewPAC OS version

Start the ViewPAC_Utility, and then select the "System Information" tab to check the current OS version.

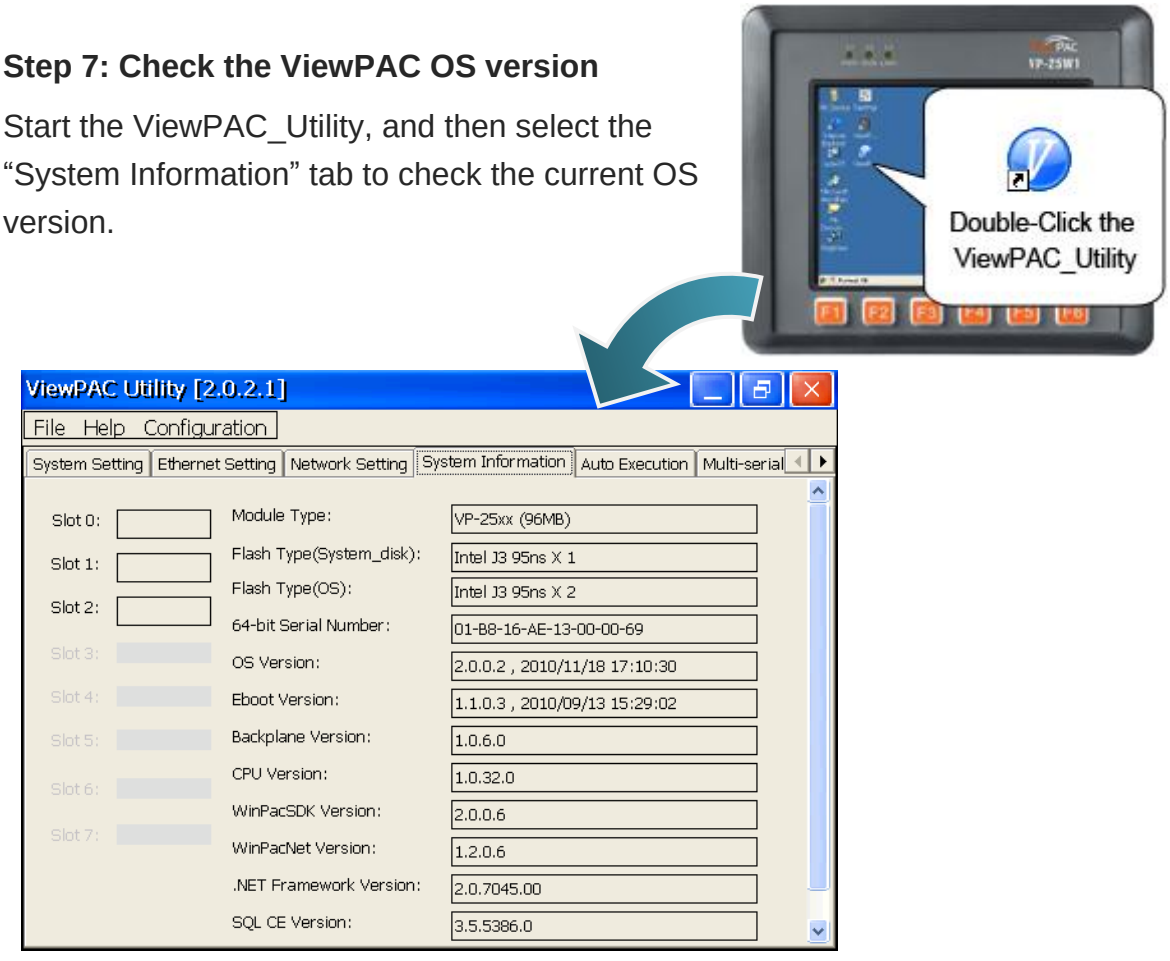

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.2. SDKs Updates

The updates files of SDK image are located on:

CD:\Napdos\vp-2000_ce50\SDK\

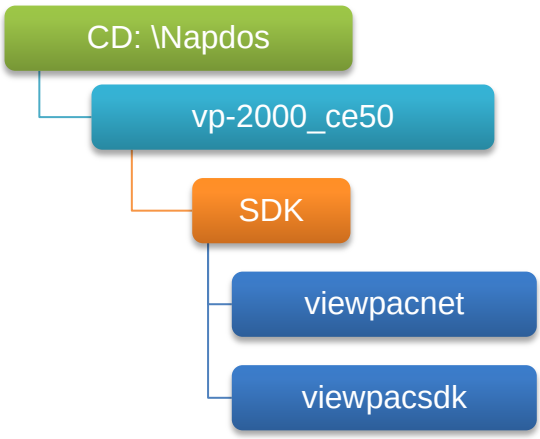

By eVC and donet development tools, the ViewPAC SDK installation is divided into the following two parts:

By eVC and donet development tools, the WinPAC SDK installation is divided into the following two parts:

i. WinPAC SDK updates for dotnet

ii. WinPAC SDK updates for eMbedded Visual C++

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.2.1. WinPAC SDK updates for C# or VB.net

To determine the SDK version that is compatibly running on the WinPAC, you can read the “Release Note” which is located under each SDK folder, these files provides important updated information for what we fixed and added.

Step 1: Get the latest version of the C# or VB.net components

The latest version of the C# or VB.net components can be obtained from:

ftp://ftp.icpdas.com/pub/cd/WinPAC/napdos/wp-8x4x_ce50/sdk/WinPACNet/

Step 2: Copy the latest version of DLL to Host PC and WinPAC

The DLL files on Host PC are located at anywhere only the solution can reference it.

The DLL files on WinPAC are located at the same directory as the .exe file.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

6.2.2. WinPAC SDK updates for eMbedded Visual C++

To determine the SDK version that is compatibly running on the WinPAC, you can read the “Release Note” which is located under each SDK folder, these files provides important updated information for what we fixed and added.

Step 1: Get the latest version of the eMbedded Visual C++ components

The latest version of the eMbedded Visual C++ components can be obtained from:

ftp://ftp.icpdas.com/pub/cd/WinPAC/napdos/wp-8x4x_ce50/sdk/WinPACSDK/

Step 2: Copy the latest version of header files and libraries to Host PC

The header files are located at:

C:\Program Files\Windows CE Tools\wce500\PAC270\Include

The libraries are located at:

C:\Program Files\Windows CE Tools\wce500\PAC270\Lib

Step 3: Copy the latest version of DLL files to WinPAC

The DLL files are located at:

\System_Disk\ICPDAS\System

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

7. ViewPAC Download Center

This chapter introduces the WinPAC-8000 Download Center.

Visit the ViewPAC Download Center:
http://www.icpdas.com/products/PAC/viewpac/download/viewpac/download_os_images.htm

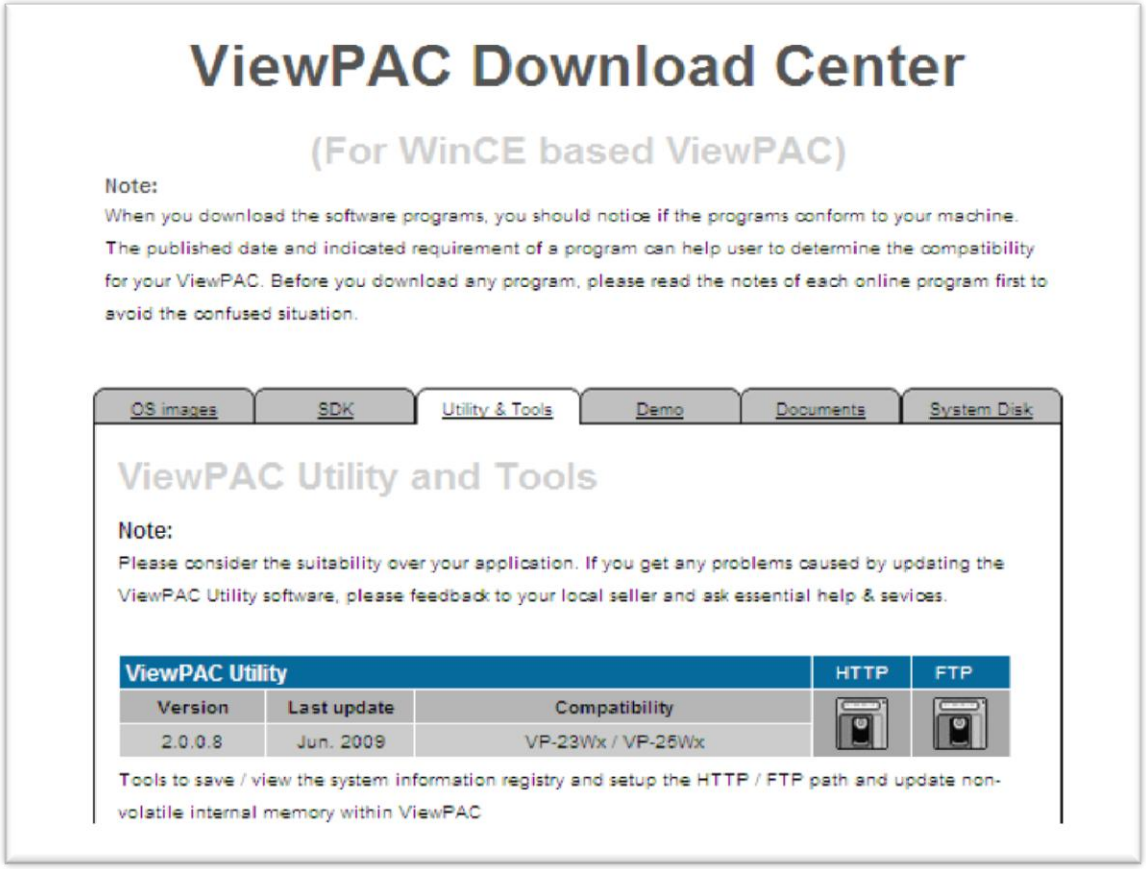
ViewPAC Download Center
(For WinCE based ViewPAC)
Note:
When you download the software programs, you should notice if the programs conform to your machine.
The published date and indicated requirement of a program can help user to determine the compatibility for your ViewPAC. Before you download any program, please read the notes of each online program first to avoid the confused situation.
OS images
SDK
Utility & Tools
Demo
Documents
System Disk
ViewPAC Utility and Tools
Note:
Please consider the suitability over your application. If you get any problems caused by updating the ViewPAC Utility software, please feedback to your local seller and ask essential help & sevices.
ViewPAC Utility
HTTP
FTP
Version
Last update
Compatibility
2.0.0.8
Jun. 2009
VP-23Wx / VP-25Wx
Tools to save / view the system information registry and setup the HTTP / FTP path and update non-volatile internal memory within ViewPAC

The following update categories are available from the ViewPAC Download Center.

✓ **OS images** Includes updates and the latest version of ViewPAC OS.

✓ **ViewPAC SDK** Includes updates and the latest version of each ViewPAC component SDK, such as ViewPAC SDK, NAPOPC_CE5 SDK, Modbus SDK, etc.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

✓ **Utility & Tools** Includes updates and the latest version for ViewPAC toolkits

✓ **Demo** Includes all related ViewPAC demos.

✓ **Documents** Includes updates and the latest version for related ViewPAC documents.

✓ **System Disk** Includes updates and the latest version for ViewPAC toolkits

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Appendix A. I-8K and I-87K Modules

There are 3 slot options to expand local I/O. And the I/O modules can be parallel bus type (high profile I-8K series) and serial bus type (high profile I-87K series).

The difference between them is

Item	I-8K Series	I-87K Series
Communication interface	Parallel bus	Serial bus
Protocol	-	DCON
Communication speed	Fast	Slow
DI latched function	-	Yes
Counter input (for digital input module)	-	Yes (100 Hz)
Power on value	-	Yes
Safe value	-	Yes
Programmable slew-rate for AO module	-	Yes

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Appendix B. Application of RS-485 Network

The RS-485 length can be up to 4000 ft or 1.2 km over a single set of twisted–pair cables, if the RS-485 network is over 4000 ft or 1.2Km, the RS-485 repeater must be added to extend the RS-485 network.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.1. Basic RS-485 Network

The basic component of the RS-485 network consist of a Master Controller (or using a PC as a host controller), and some RS-485 devices.

Tips & Warnings

If PC/Laptop has no COM port, you can use the I-7561 (USB to RS-485 converter) for connection between ViewPAC and PC/Laptop.

Before using the I-7561 converter, you must install the USB driver. The USB driver can be obtained from:

ftp://ftp.icpdas.com/pub/cd/8000cd/napdos/7000/756x/

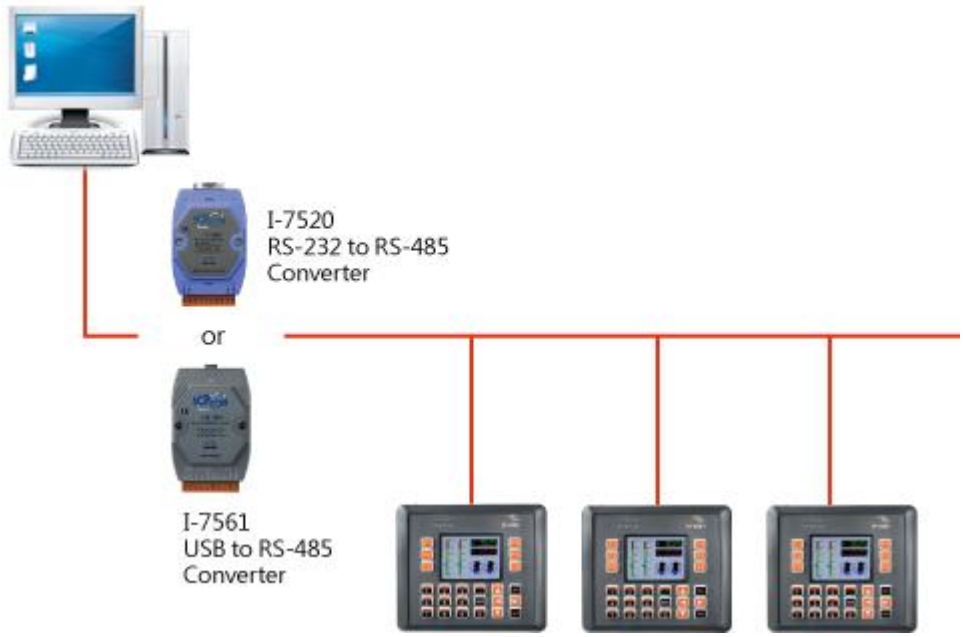

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.2. Daisy Chain RS-485 Network

All RS-485 devices are wired directly to the main network, If the network is up to 1.2 km, it will need a repeater (7510 series) to extend the network length.

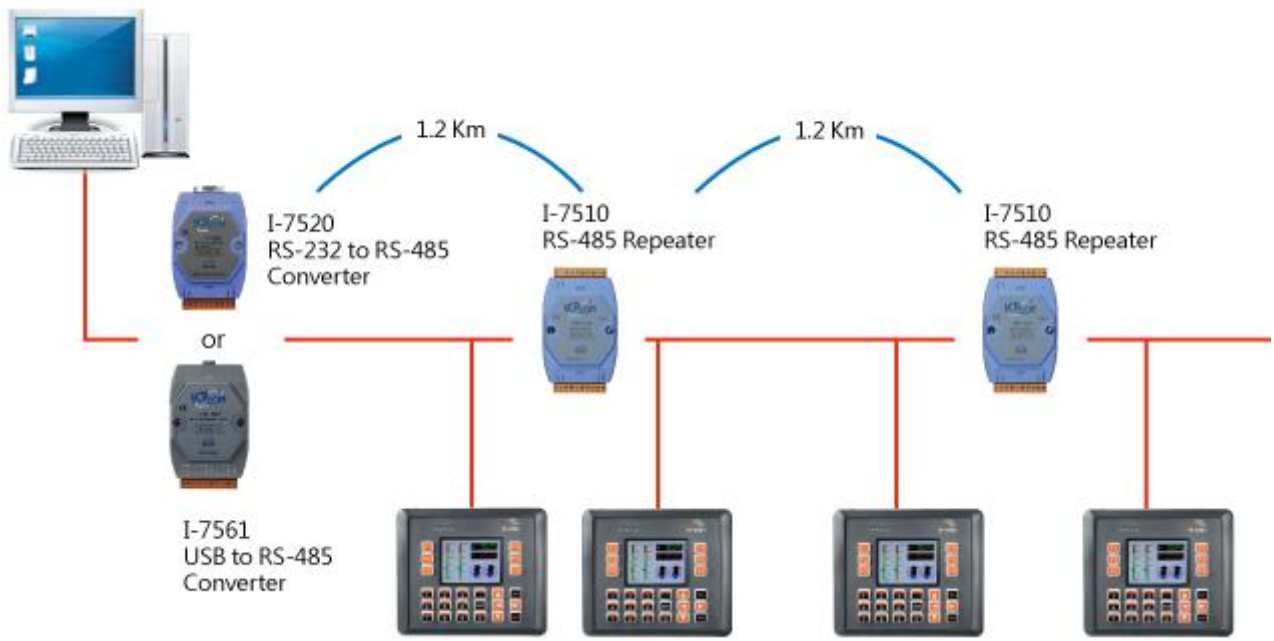

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.3. Star Type RS-485 Network

There are branches along the main network. In this case, it is better to have a repeater to isolate or filter the noise that is made by devices.

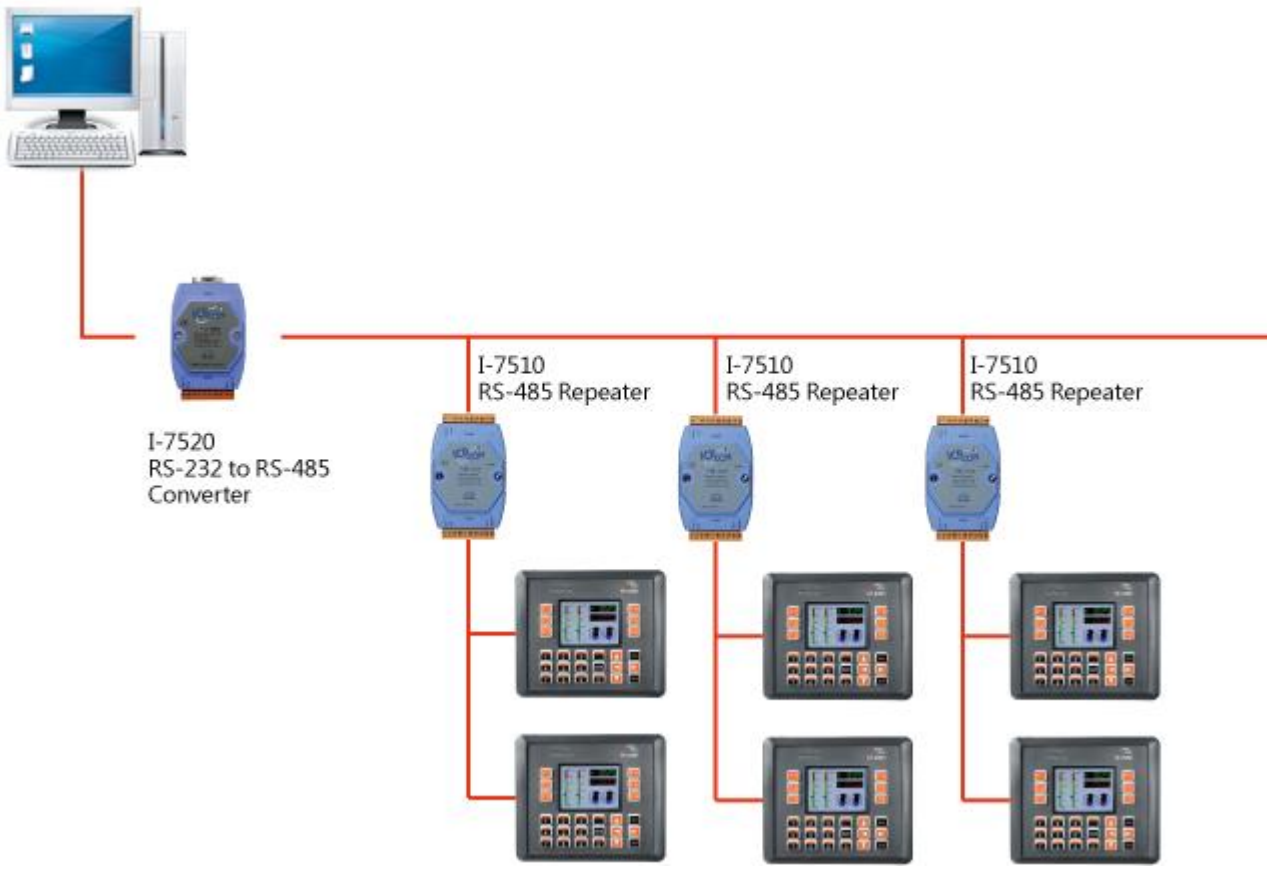

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

There is a better choice to use 7513 as a RS-485 hub on start type network.

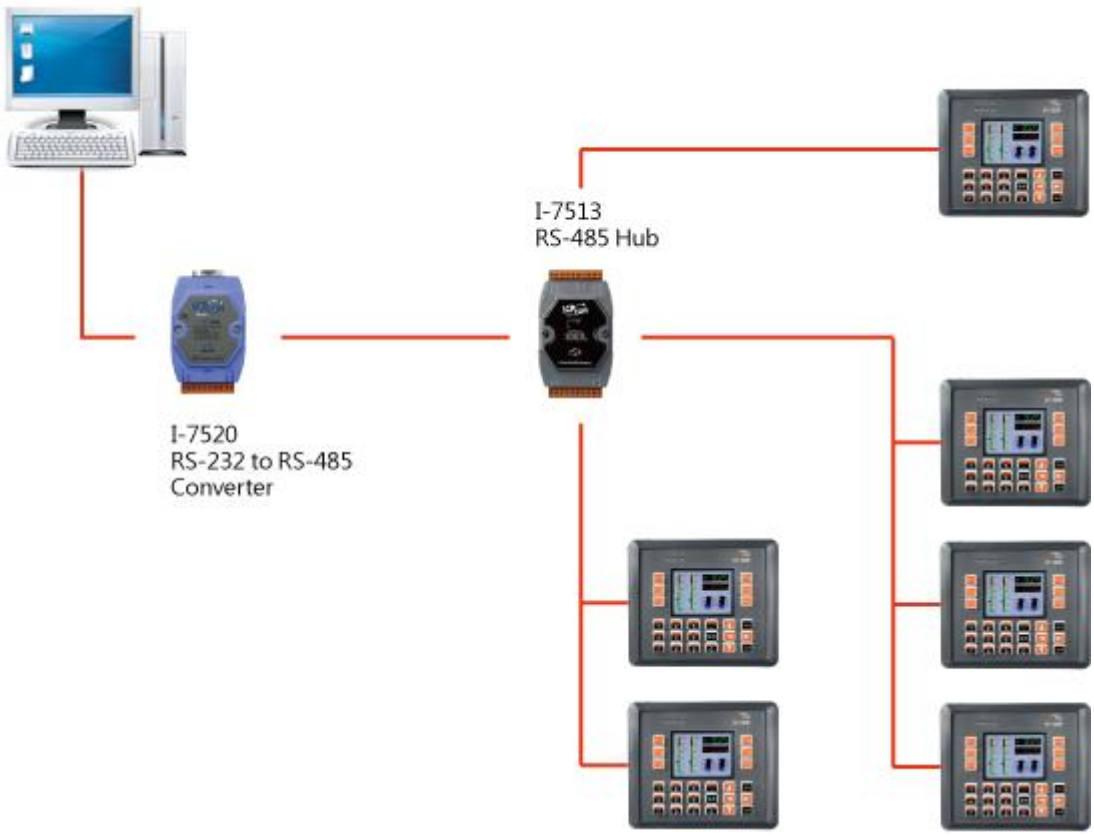

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.4. Random RS-485 Network

There are branches along the main wire. In this case, it is better to have a repeater to isolate or filter the noise that is made by devices.

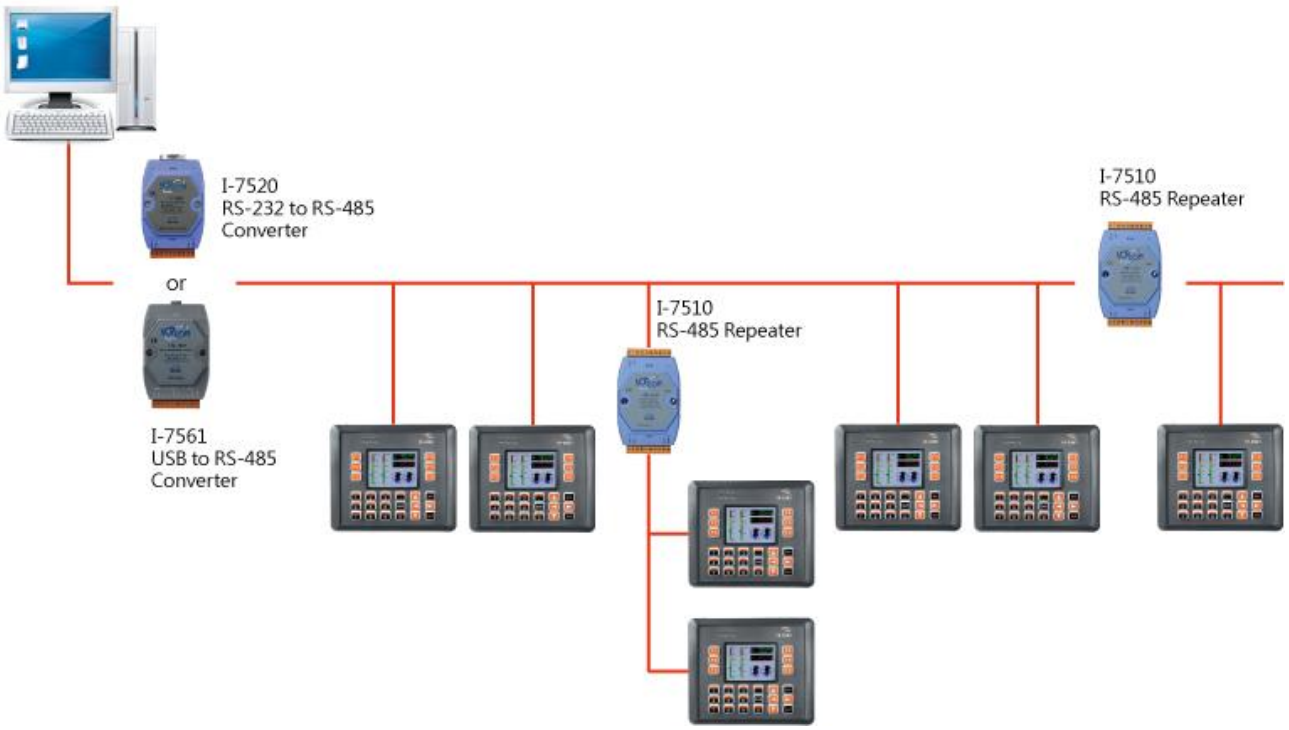

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.5. Master/Slaves Settings

There must be exist one master to have a jumper in the same network. In a master/slave application, “Master” is the default configuration of ViewPAC.

B.5.1. ViewPAC as a Master (default)

When one of ViewPAC is set to the master mode, then all the other devices on the same network must be set to the slave mode.

Set ViewPAC to the master mode by adjusting the jumpers on the power board of ViewPAC. Refer to the following figure:

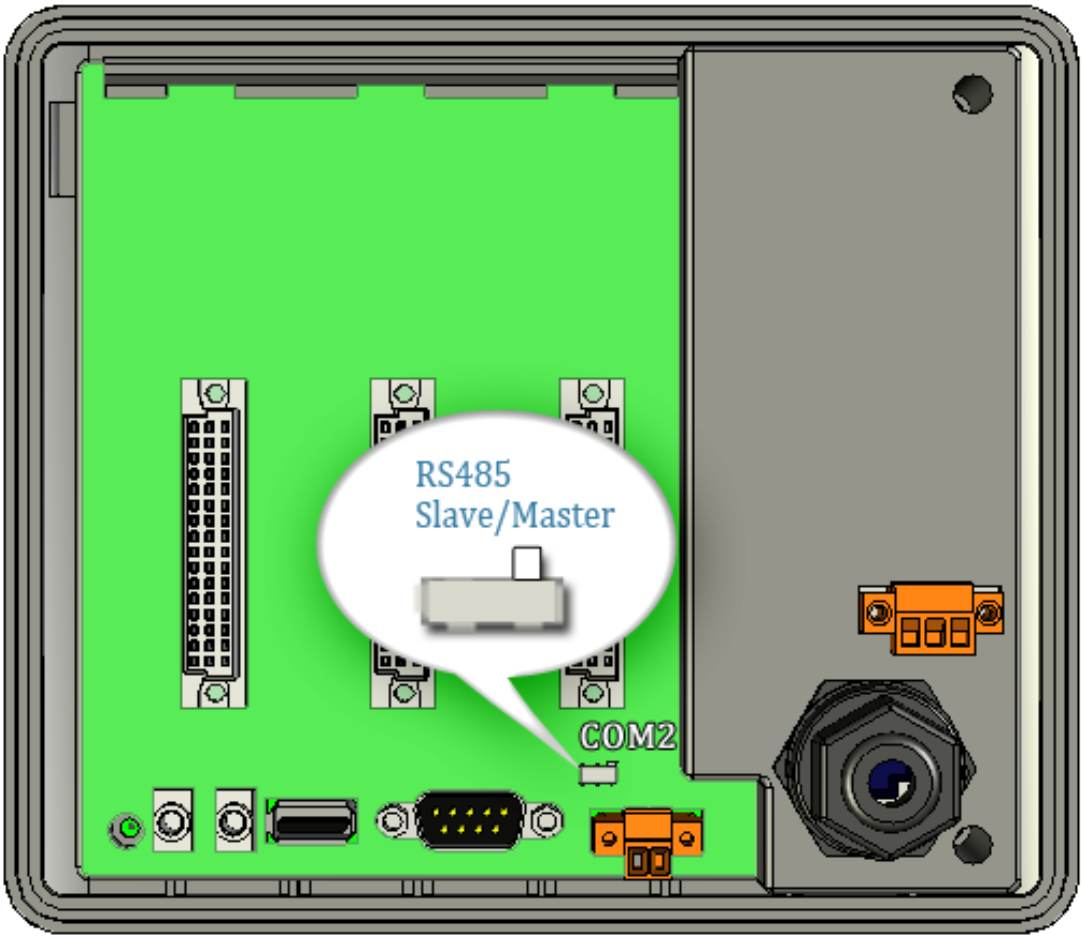

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

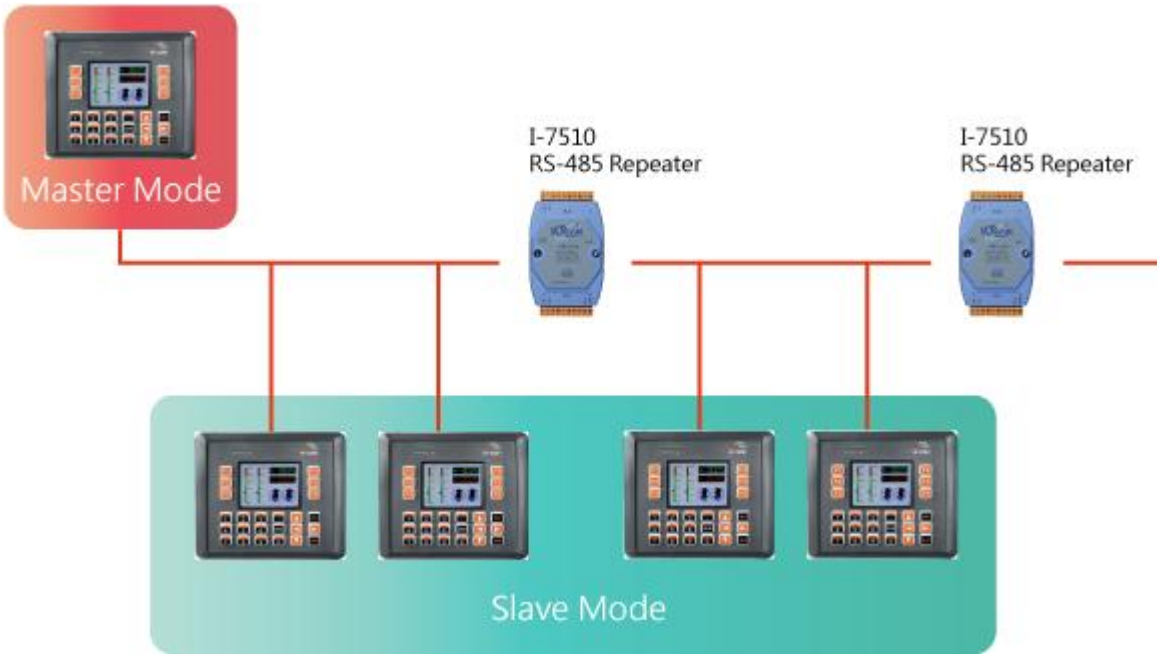

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

B.5.2. ViewPAC as a Slave:

Set ViewPAC to the slave mode by adjusting the jumpers on the power board of ViewPAC. Refer to the following figure:

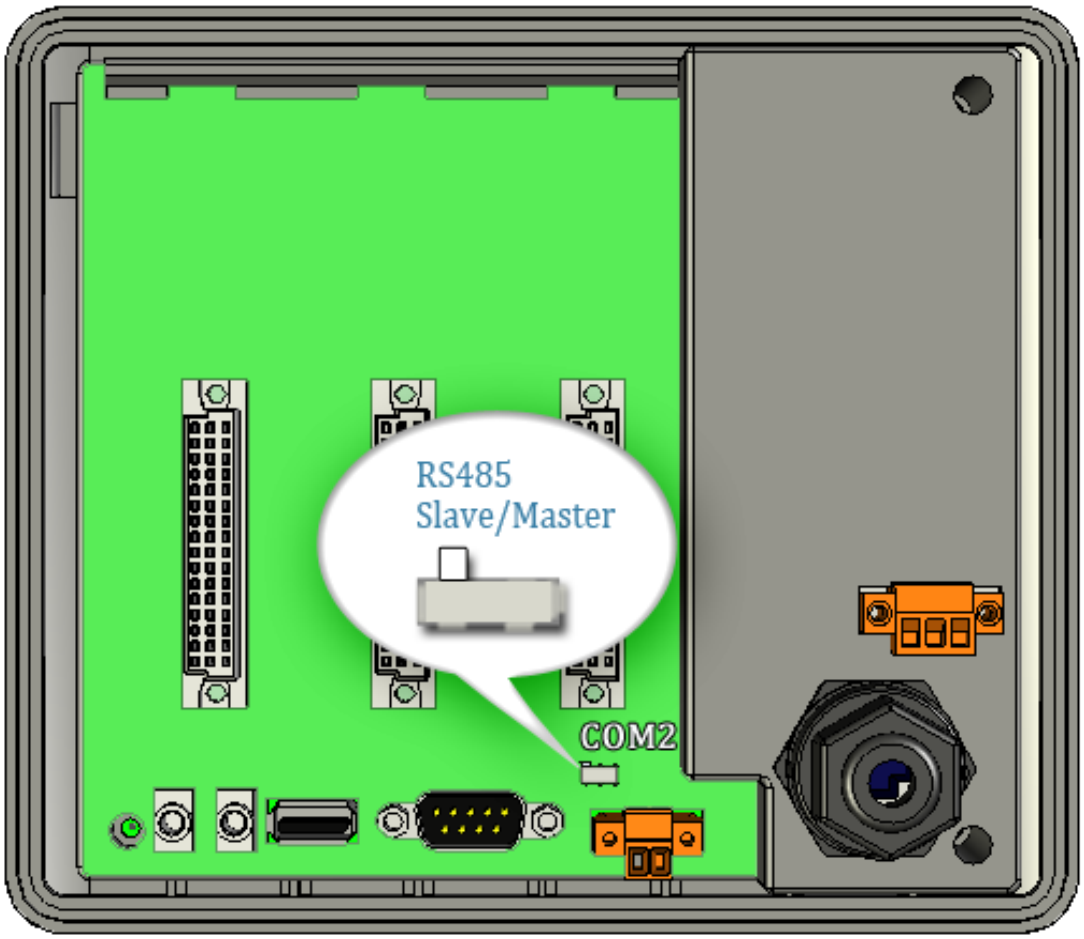

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

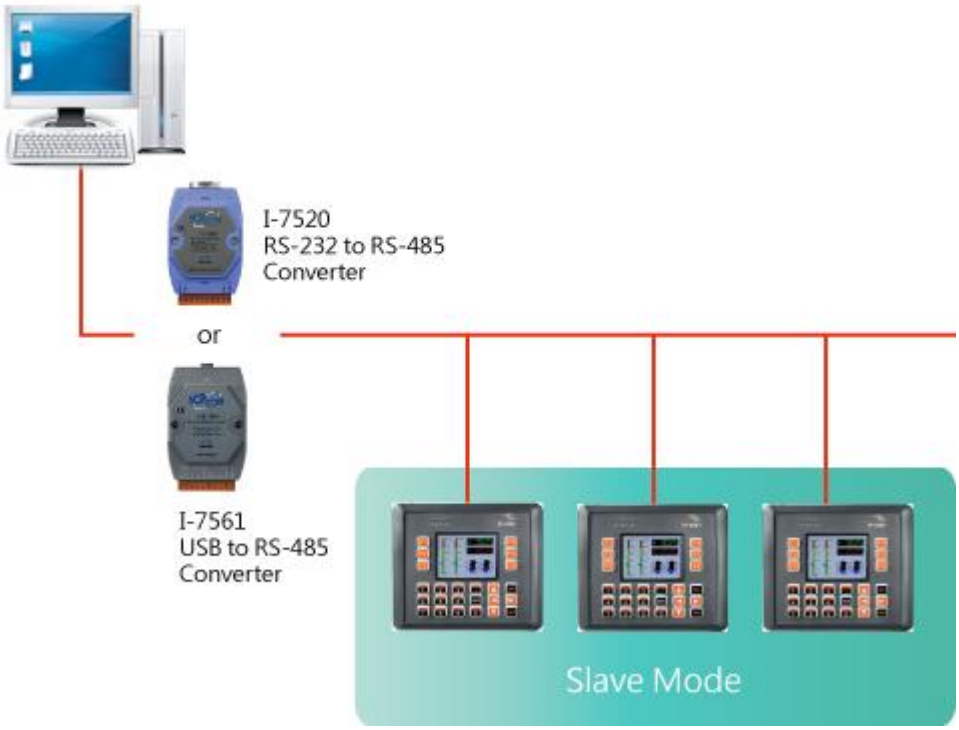

The maximum distance of RS-485 without using a repeater is 1,200 meters (4,000 feet). You can extend that distance by adding an RS-485 Repeater every 1,200 meters as shown below.

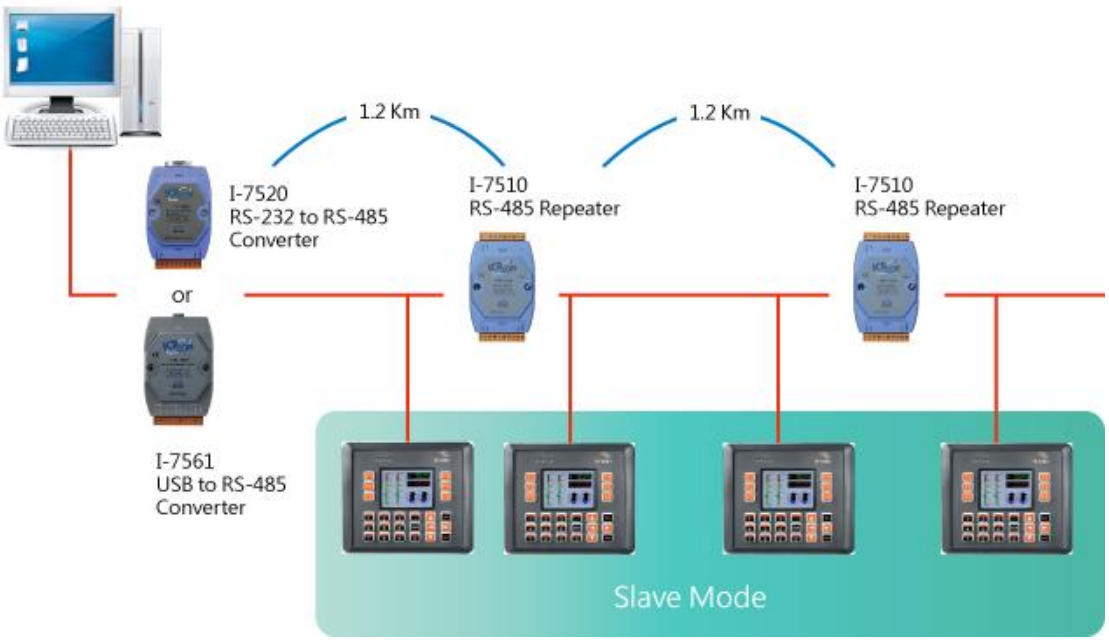

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Appendix C. Tips – How to

We will continue to add flexibility and support to the ViewPAC that always can be found at:

http://ftp.icpdas.com/pub/cd/winpac/napdos/wp-8x4x_ce50/document/faq/general_io_expansion/

The following sections will present several common application of ViewPAC.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.1. How to add a user account to remote login the ViewPAC from PC

C.2.1. How to add a user account

Here are step by step instructions on how to add a user account.

Step 1: Run the ViewPAC Utility

Step 2: On the Network tab, click Login tab, type the User Name and Password, and then click Add button

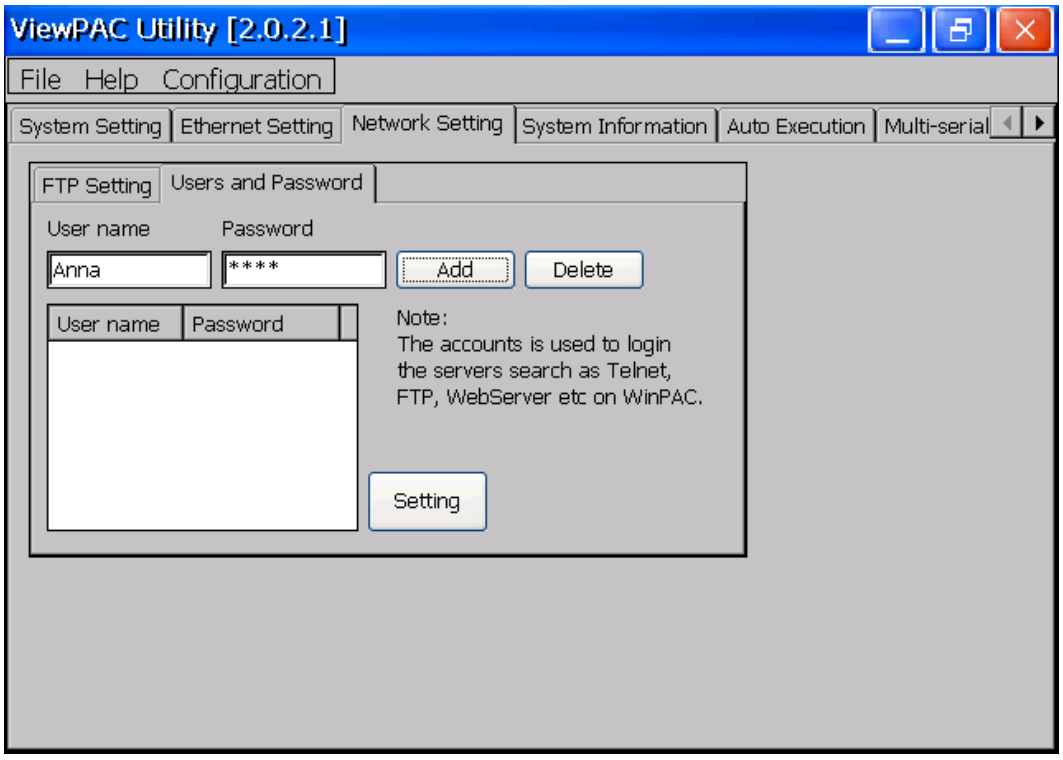

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: The user has been added to the allowed under the remote login and included in the following list

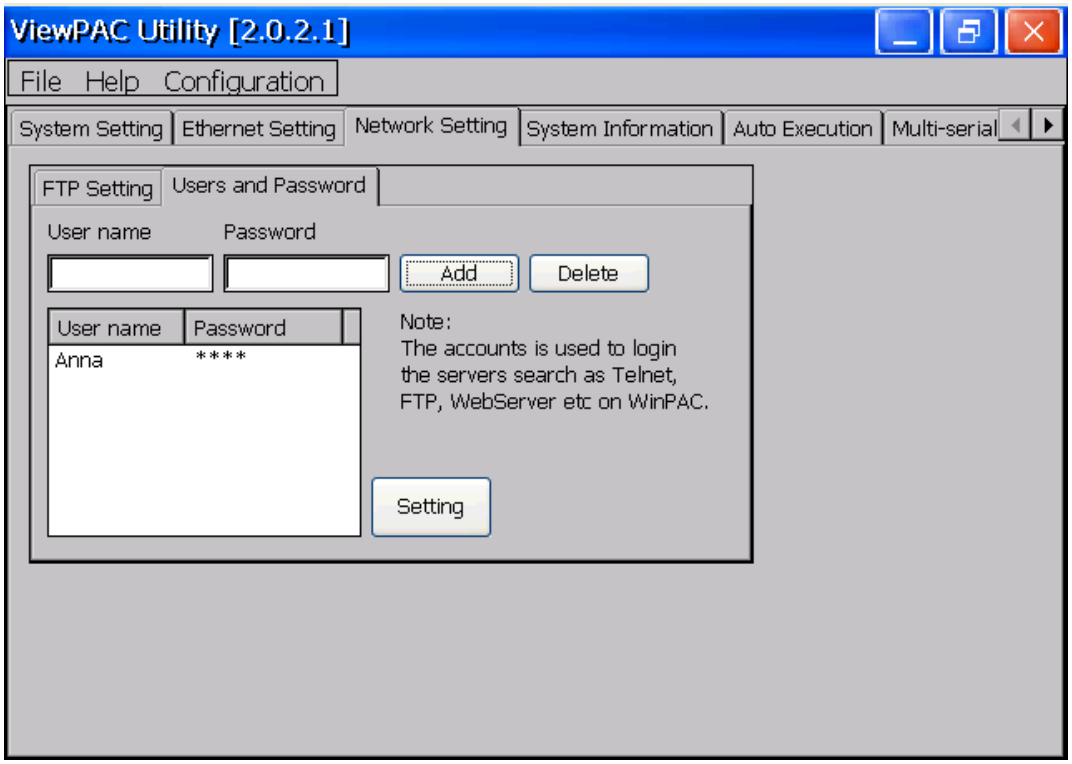

Step 4: On the File menu, click Save and Reboot for changes to take effect

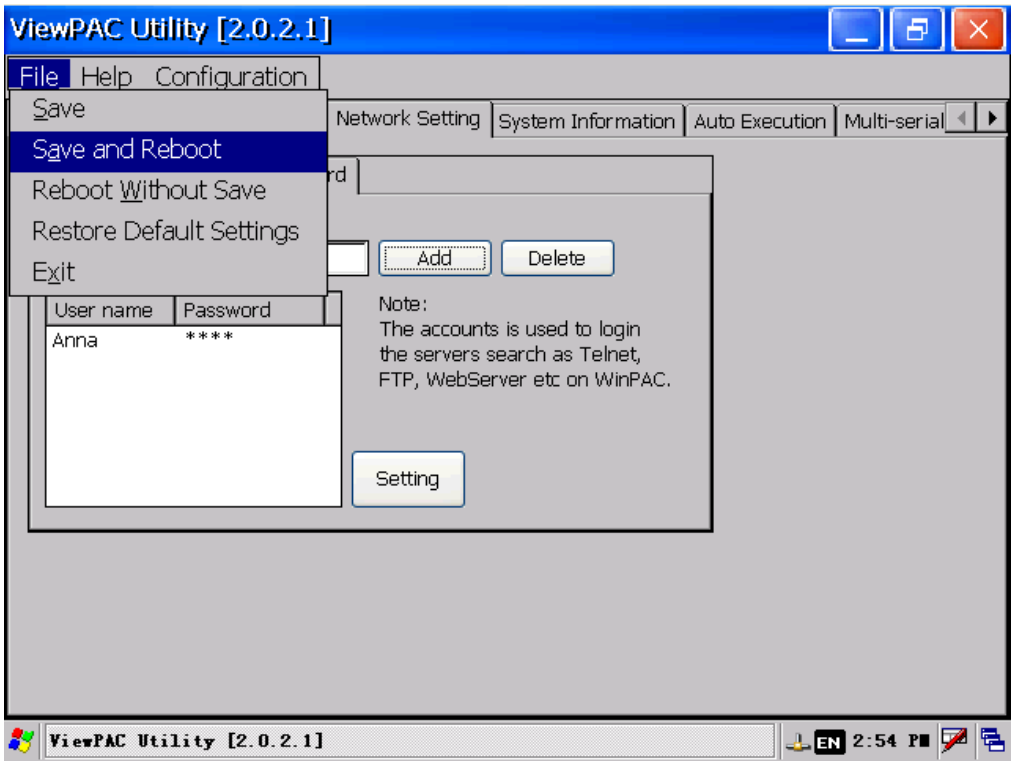

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.2.2. How to Use telnet to remote login the ViewPAC from PC

Here are step by step instructions on how to use telnet to remote login the XPAC from PC.

Step 1: On the PC, open a MS-DOS command prompt

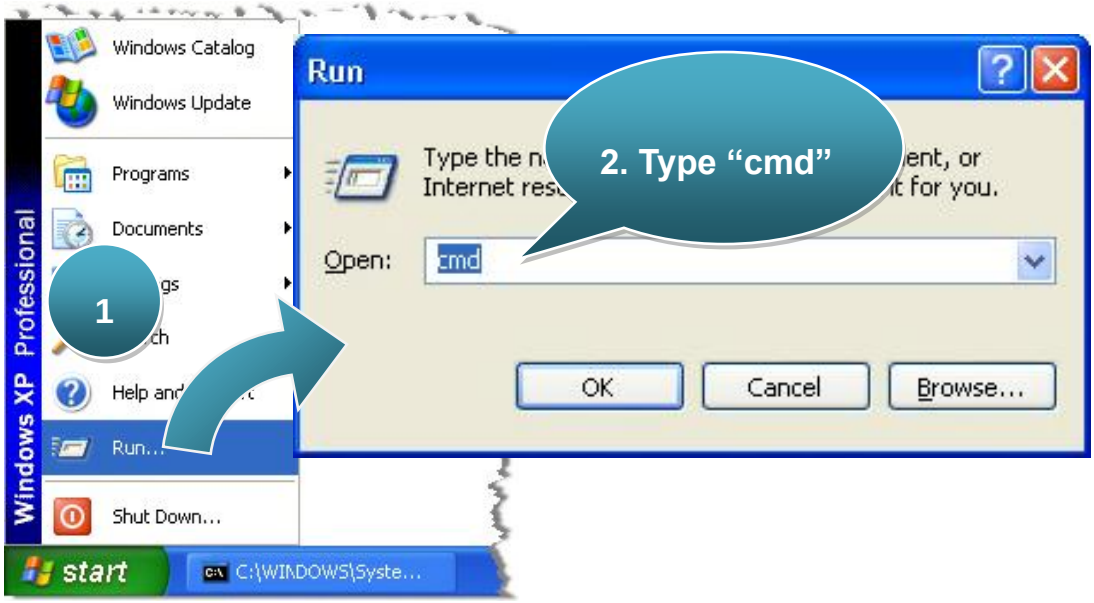

Step 2: At the command prompt, type “telnet (IP address)”

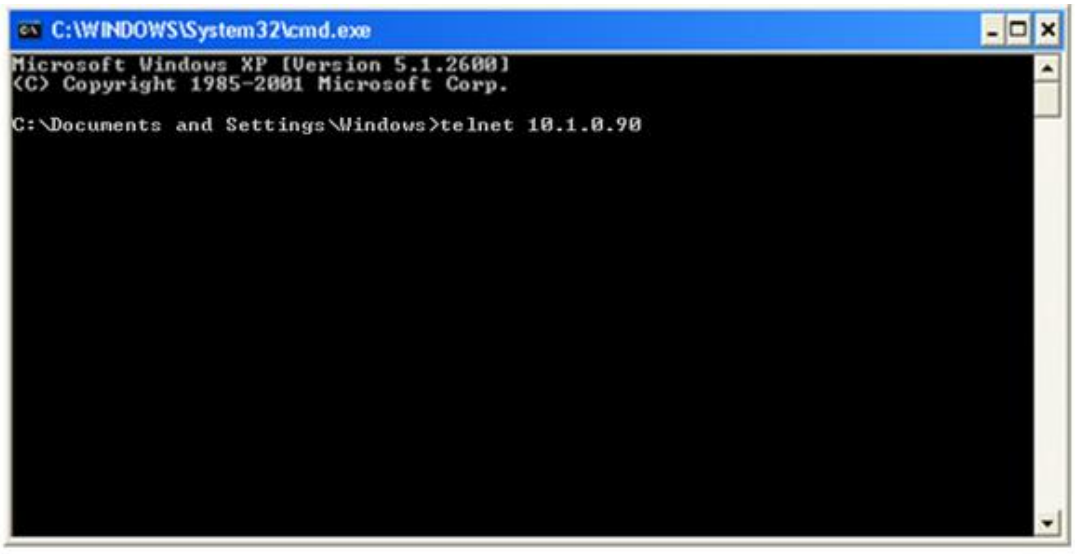

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 3: The connection has been set up, and then type the name and password

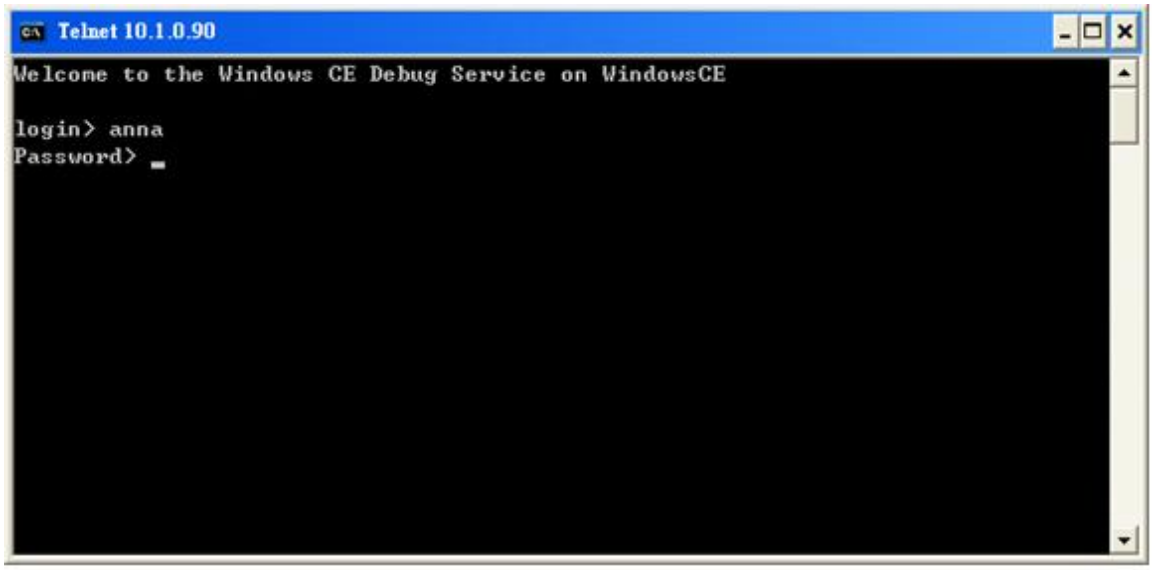

Step 4: The remote login has been completed

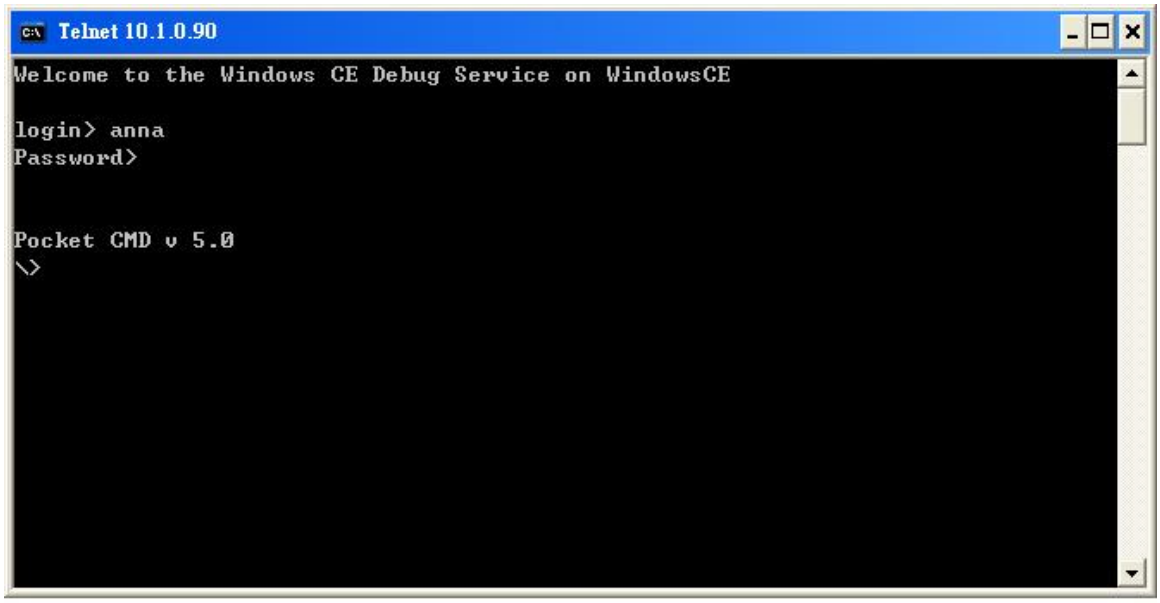

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.2.3. How to remove the user from the login list

Here are step by step instructions on how to remote the user from the login list.

Step 1: Click a user from the list which you want to remove, and the user will display in the field, and then press Delete to delete the user from the login list

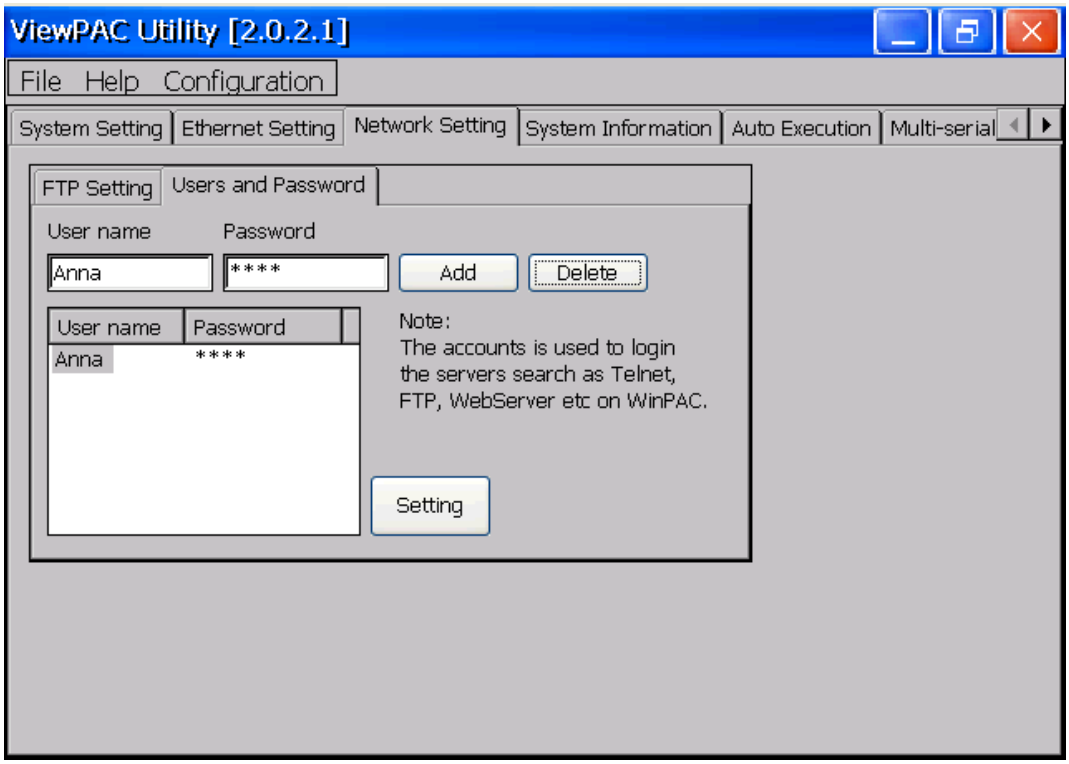

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: On the File menu, click Save and Reboot for changes to take effect

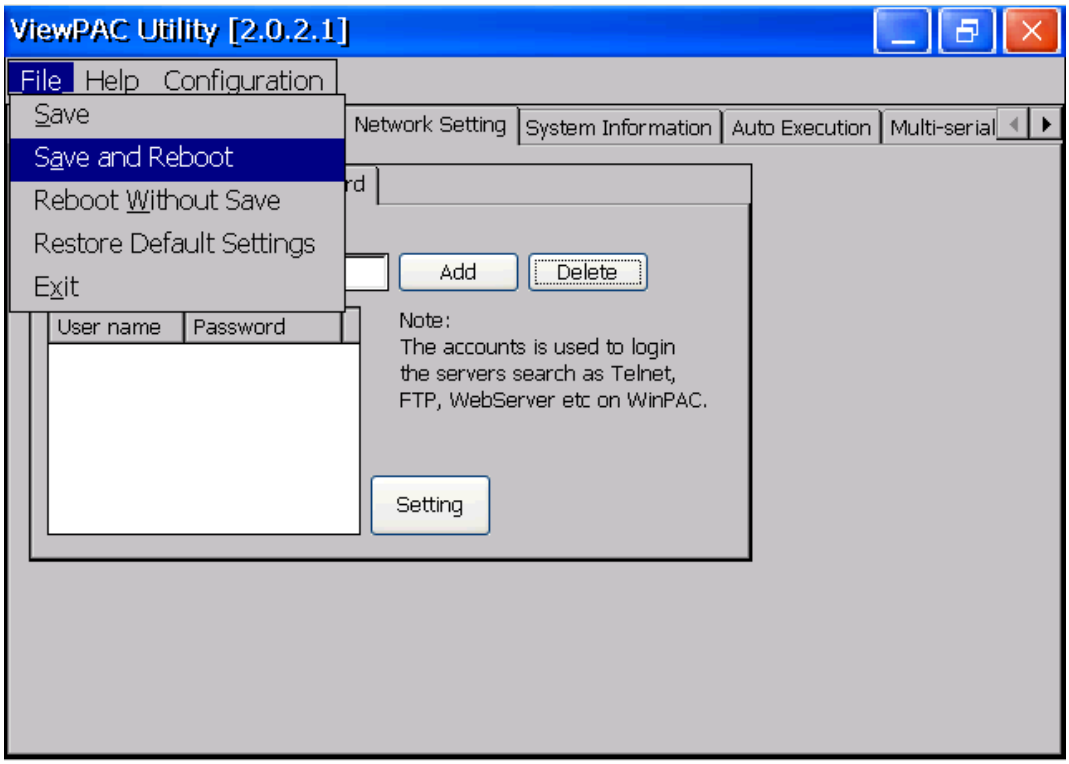

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.2. How to online debug ViewPAC

Debugging is a process that you use to find and resolve errors, or bugs, in a program.

C.2.1. Debug ViewPAC programs in EVC++

Step 1: On the "Tools" menu, click "Configure Platform Manager…" command

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: On the “Windows CE Platform Manager Configuration” dialog, click the “Properties…” button

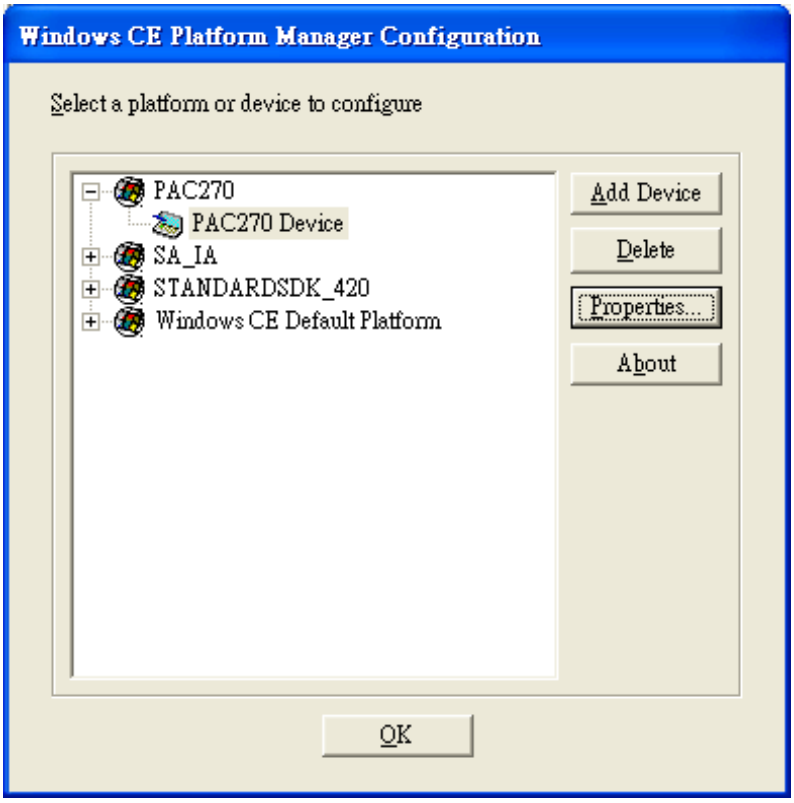

Step 3: On the “Device Properties” dialog, click the “Configure…” button

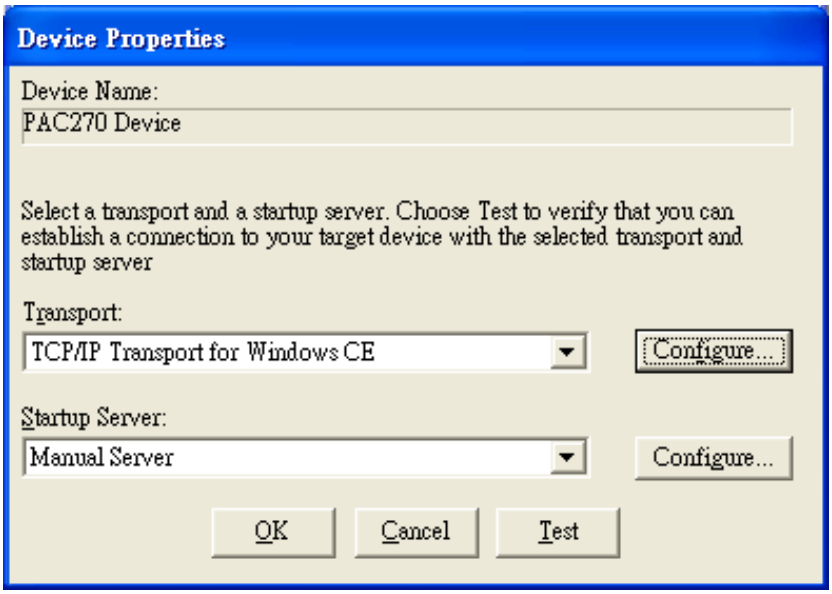

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: On the “TCP/IP Transport Configuration” dialog, select the “Fixed port” check box, and then click the “OK” button

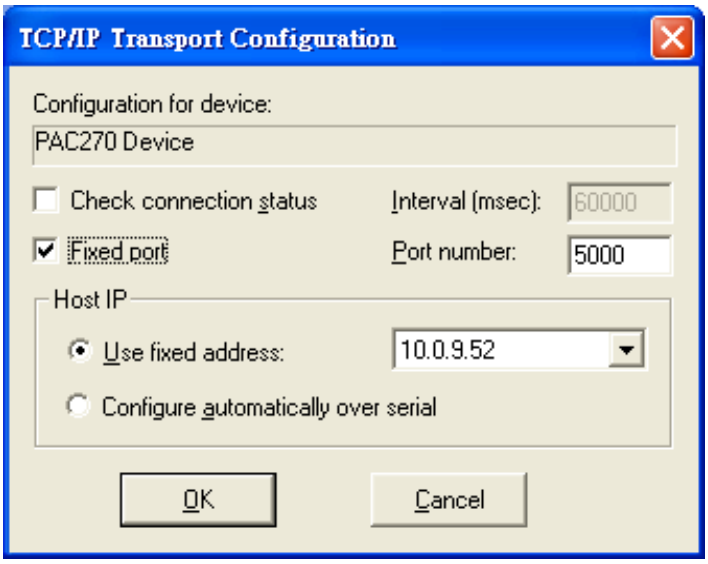

Step 5: On the “Windows CE Platform Manager Configuration” dialog, click the “Test” button

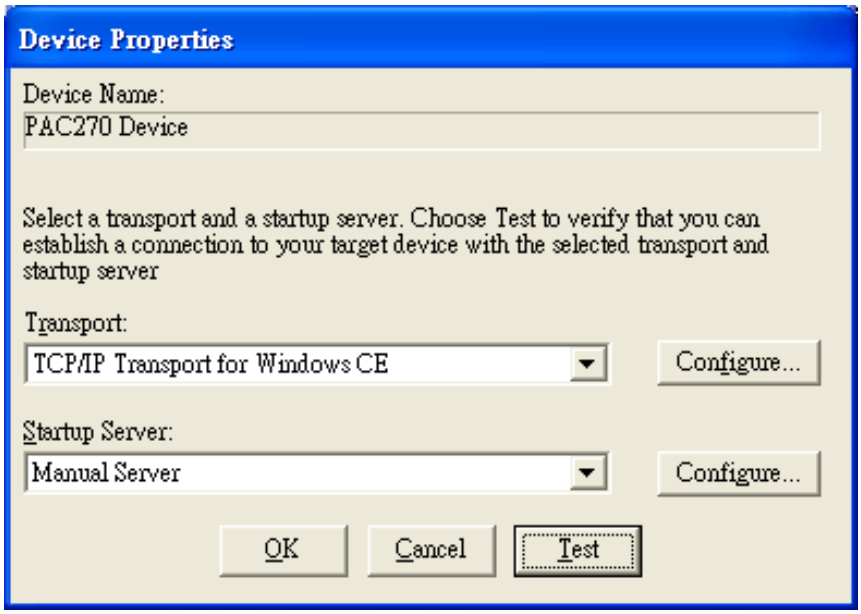

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 6: The “Manual Server - Action” dialog will appear displaying a command line, before click the “OK” button to close dialog, turn to the ViewPAC controller side to do the next two-steps

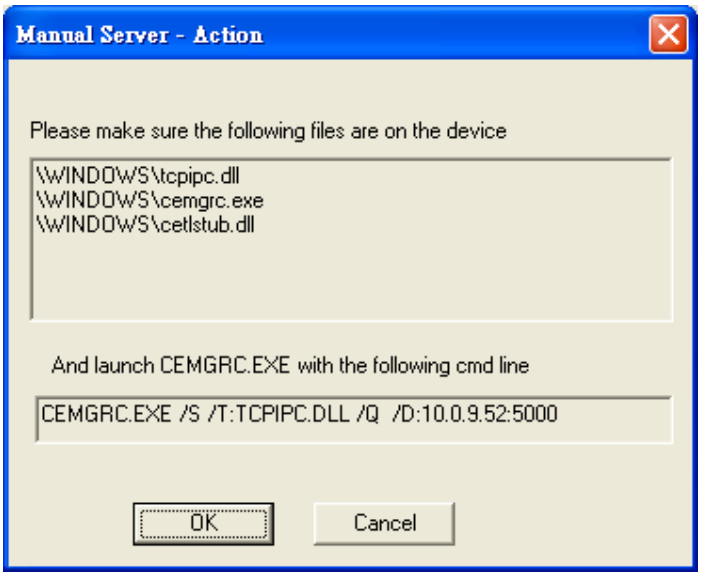

Step 7: On the ViewPAC controller side, select the “ Start” menu, and then click the “Run…” command

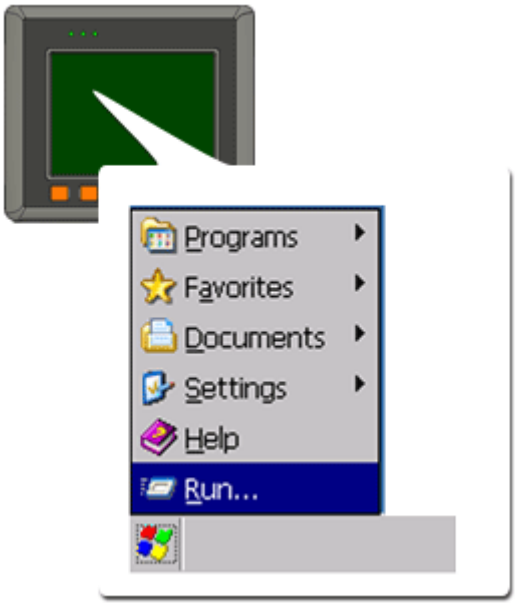

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 8: On the “Run” dialog, type the command which displays in step 5 and then click the “OK” button

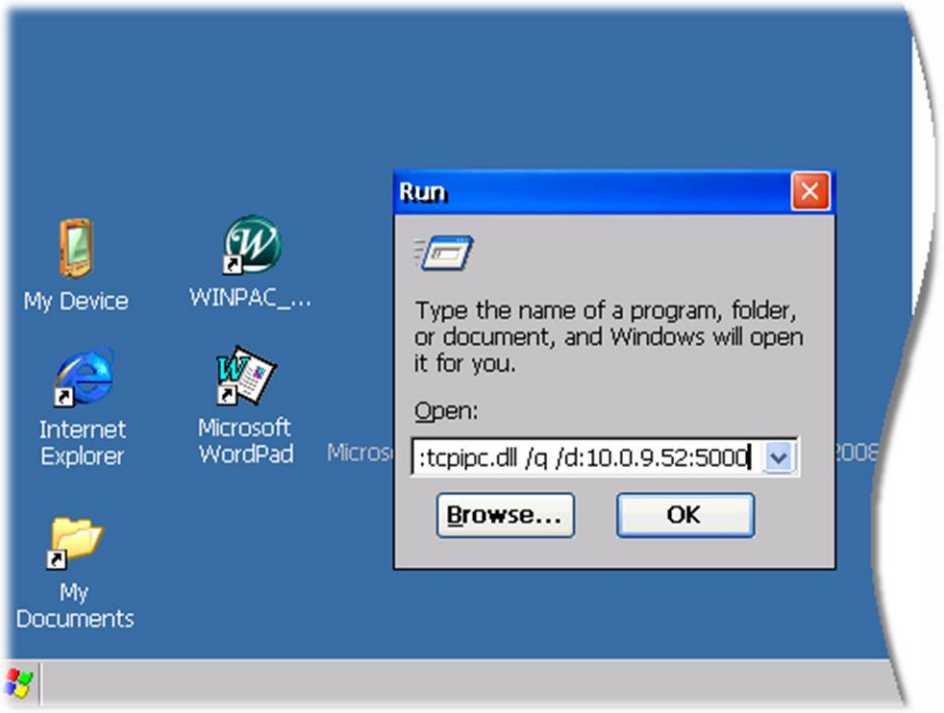

Step 9: Return to the Host PC side, on the “Manual Server – Action” dialog, click the “OK” button

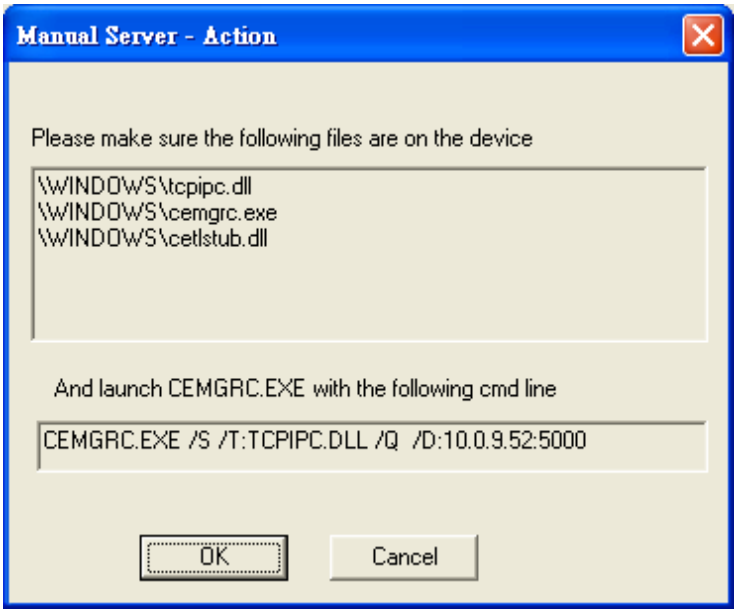

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 10: On the “Testing Device Connection” dialog, click the “OK” button

Step 11: On the “Device Properties” dialog, click the “OK” button

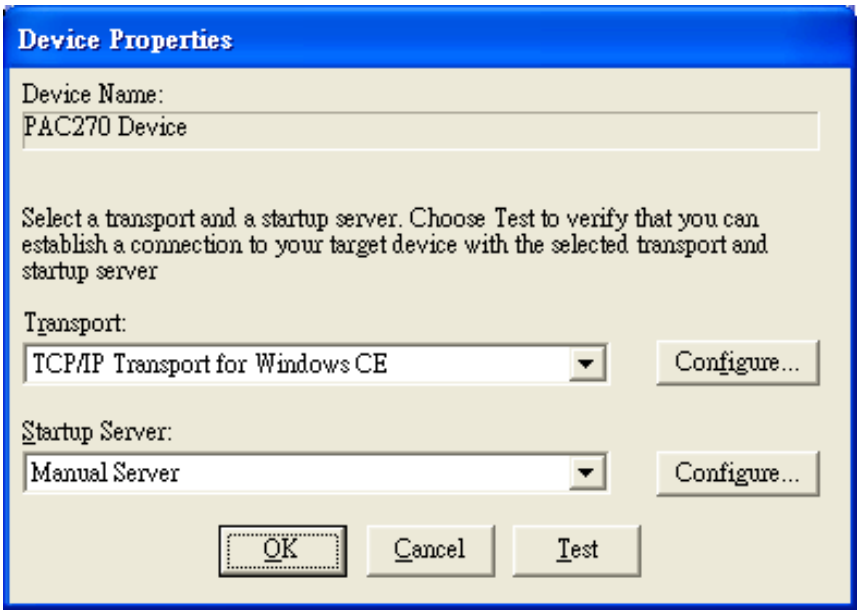

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 12: On the “Windows CE platform or device to configure” dialog, click the “OK” button

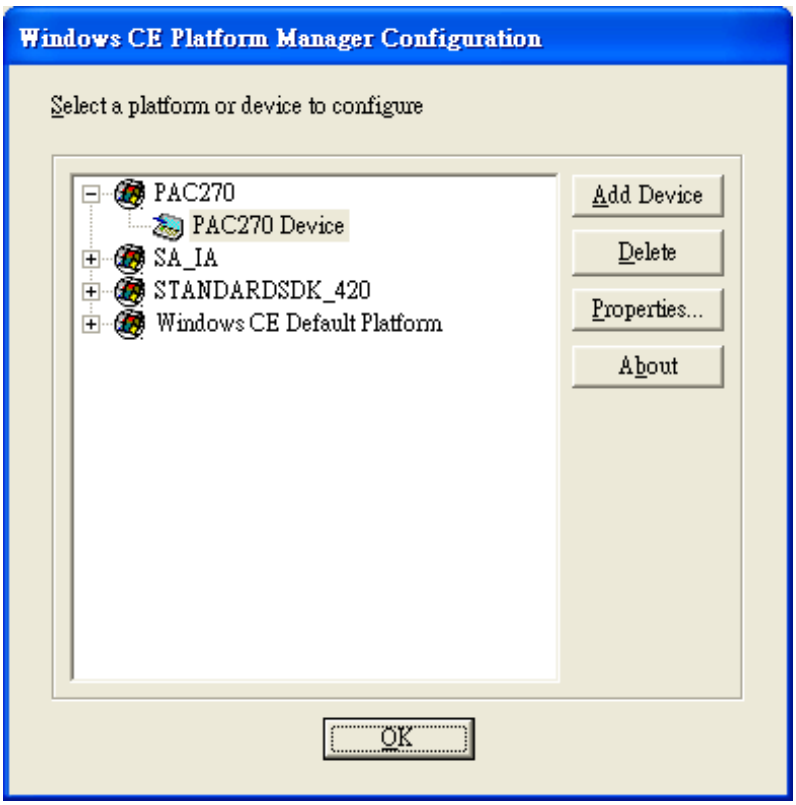

Step 13: On the “Build” menu, select the “Start Debug” command and then click the “Go” command

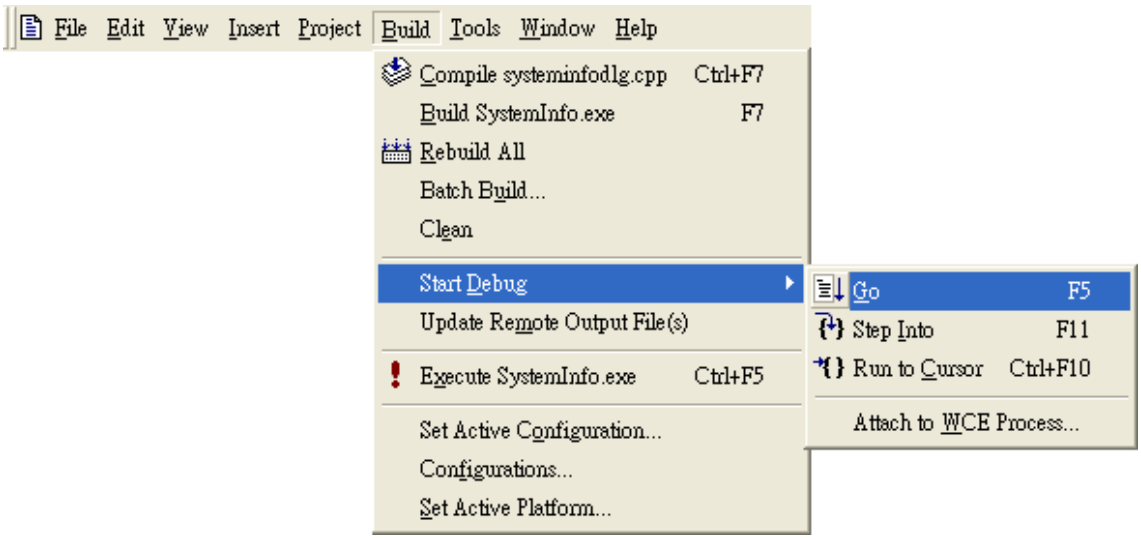

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 14: The “Manual Server - Action” dialog will appear displaying a command line, before click the “OK” button to close dialog, turn to the ViewPAC controller side to do the next two-steps

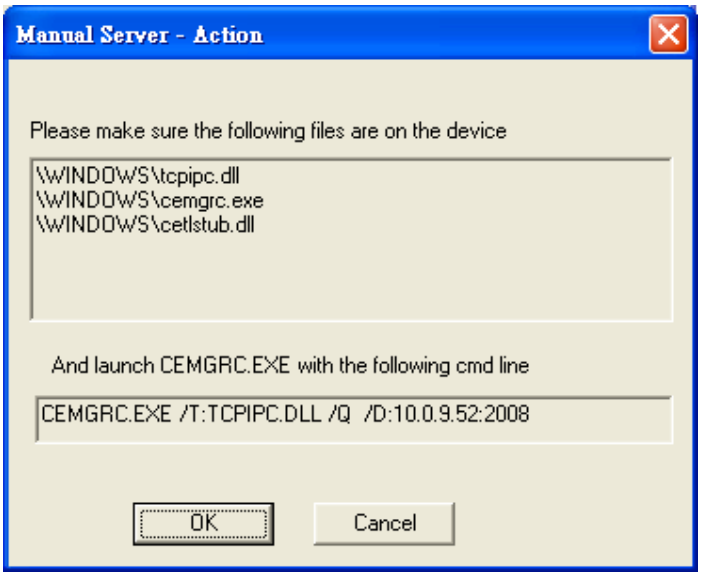

Step 15: On the ViewPAC controller side, select the “ Start” menu, and then click the “Run…” command

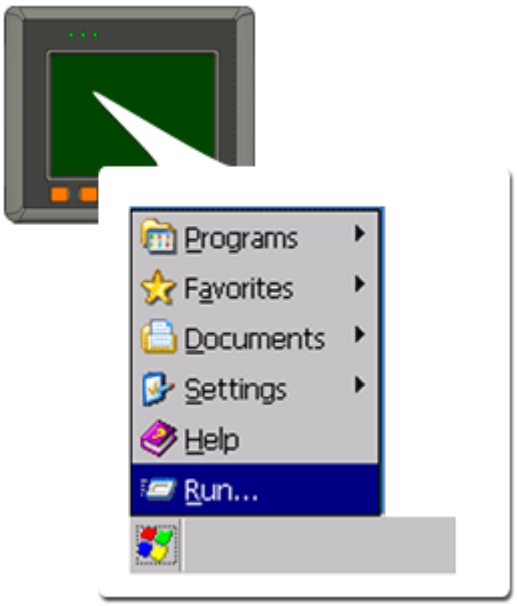

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 16: On the “Run” dialog, type the command which displays in step 5 and then click the “OK” button

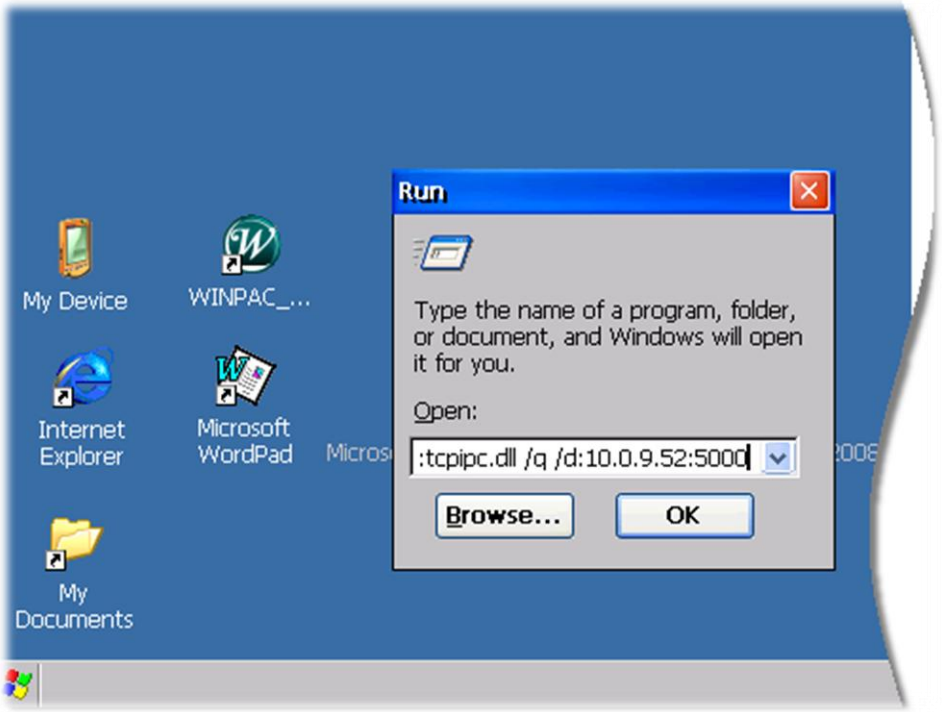

Step 17: Return to the Host PC side, on the “Manual Server – Action” dialog, click the “OK” button

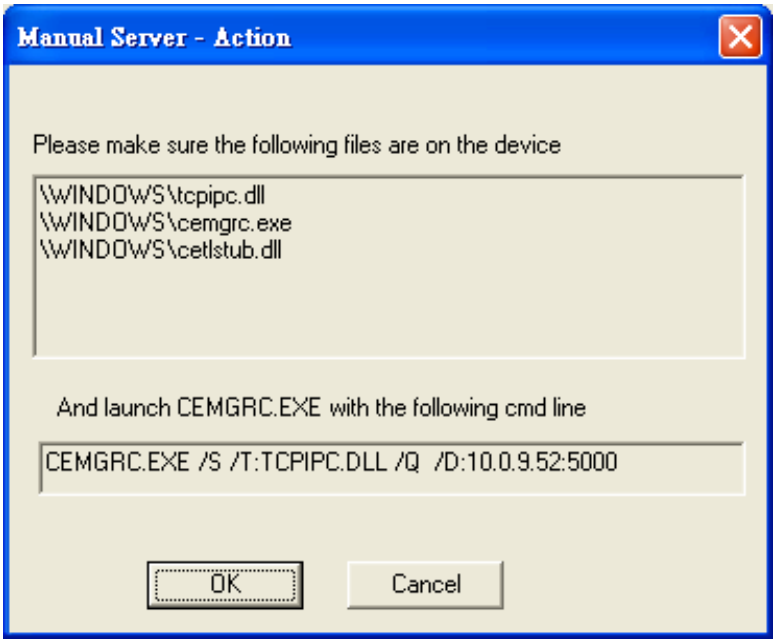

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 18: On the “Manual Server - Action” dialog, click the “OK” button

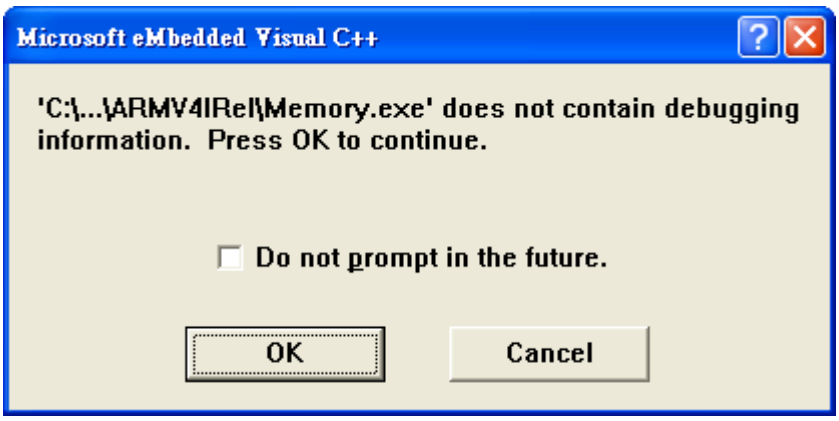
Microsoft eMbedded Visual C++
'C:\...\ARMV4IRel\Memory.exe' does not contain debugging information. Press OK to continue.
Do not prompt in the future.
OK
Cancel

Step 19: Connection established. Then you can debug on line.

Tips & Warnings

If you want to quit the debugger and return to editing, you can click the “Stop Debugging “button from “Debug” menu

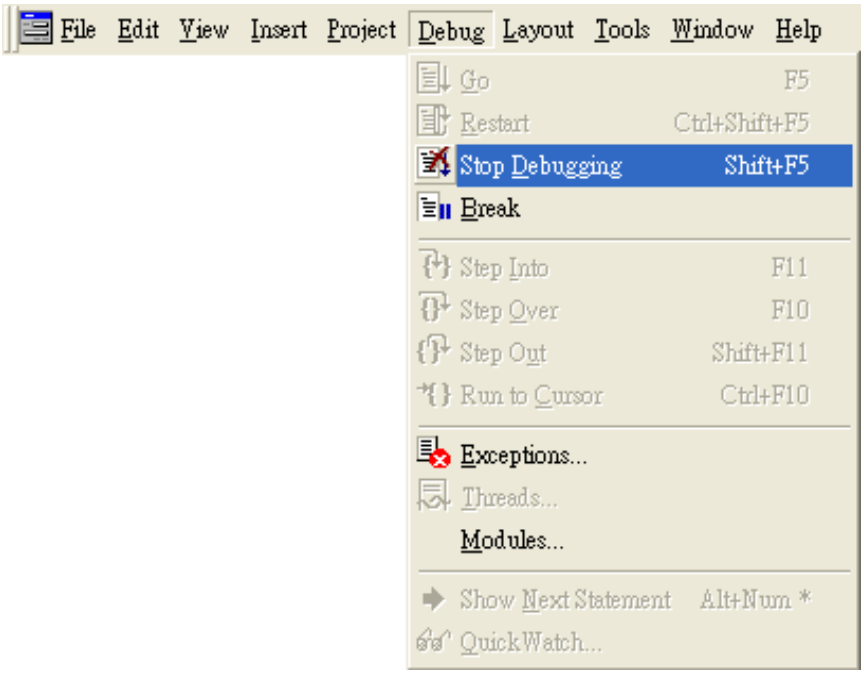

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

C.2.2. Debug ViewPAC programs in Visual Studio 2005/2008

Debugging in Visual Studio 2005/2008 are provided by ViewPAC OS image V 1.3.0.4 or later.

Step 1: Make sure the following file are listed with the matching version numbers

Path	File
C:\Program Files\Common Files\Microsoft Shared\CoreCon\1.0\Bin	1. ActiveSyncBootstrap.dll 2. ConMan2.dll 3. ConManPS.dll 4. DesktopDMA.dll 5. eDbgTL.dll 6. TcpConnectionC.dll
C:\Program Files\Common Files\Microsoft Shared\CoreCon\1.0\Bin\1033	conmanui.dll
C:\Program Files\Common Files\Microsoft Shared\CoreCon\1.0\Target\wce400\armv4i	1. DeviceDMA.dll 2. eDbgTL.dll 3. TcpConnectionA.dll 4. clientshutdown.exe 5. CMAccept.exe 6. ConmanClient2.exe

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: If the version matches correctly and the entire file are there, copy the following files to ViewPAC :\ System_Disk\ICPDAS\System folder

- ✓ Clientshutdown.exe
- ✓ ConmanClient2.exe
- ✓ CMaccept.exe
- ✓ eDbgTL.dll
- ✓ TcpConnectionA.dll

Step 3: On the "Project" menu, click "[Project Name] Properties…" command

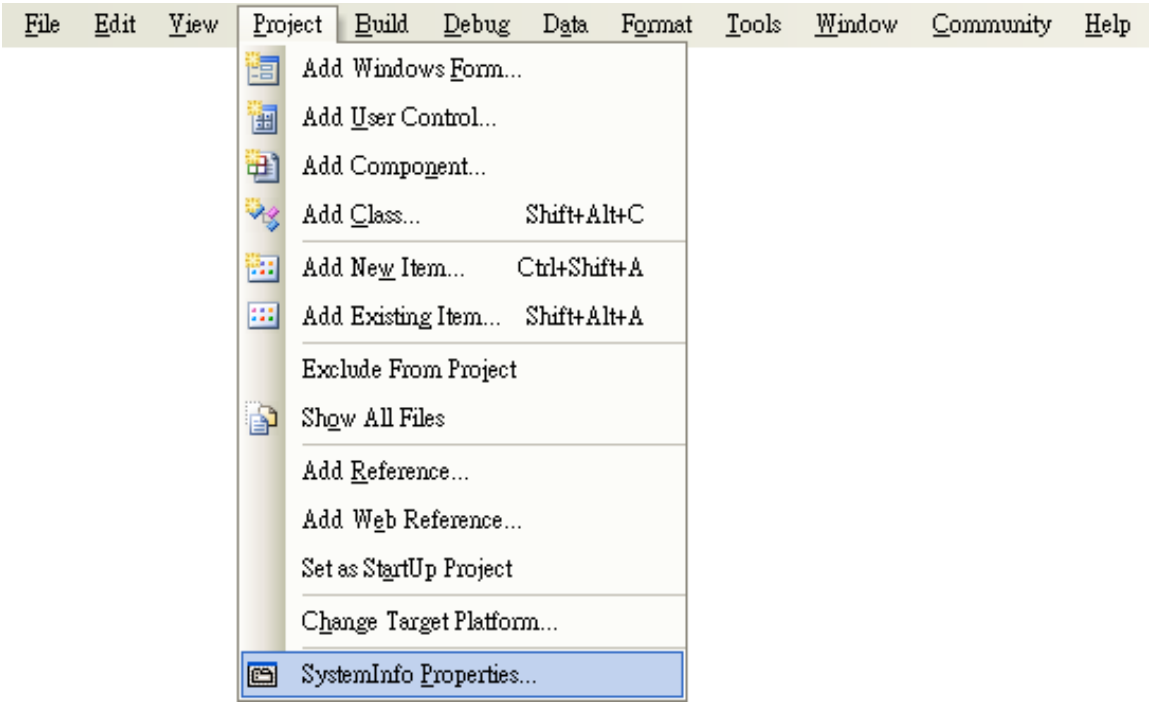

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: On the “SystemInfo*” tab, unselect “Deploy the latest version of the .NET compact Framework (includeing Service Packs)” check box

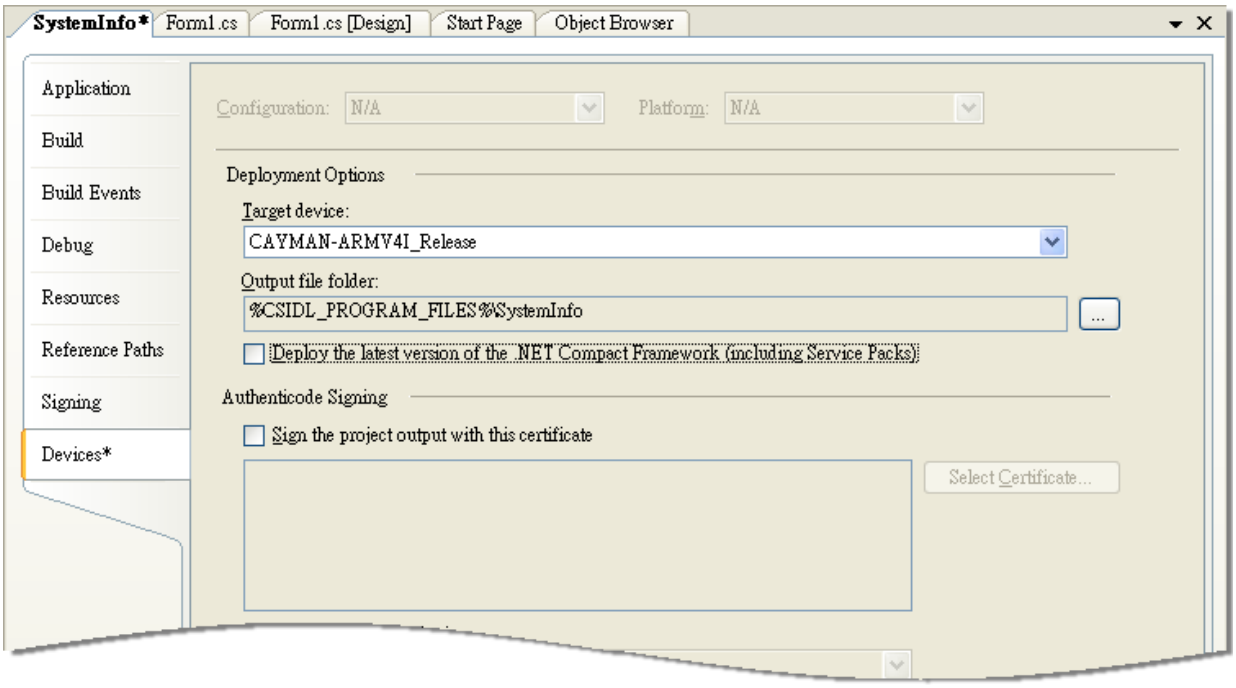

Step 5: On the “Tools” menu, click “Options…” command

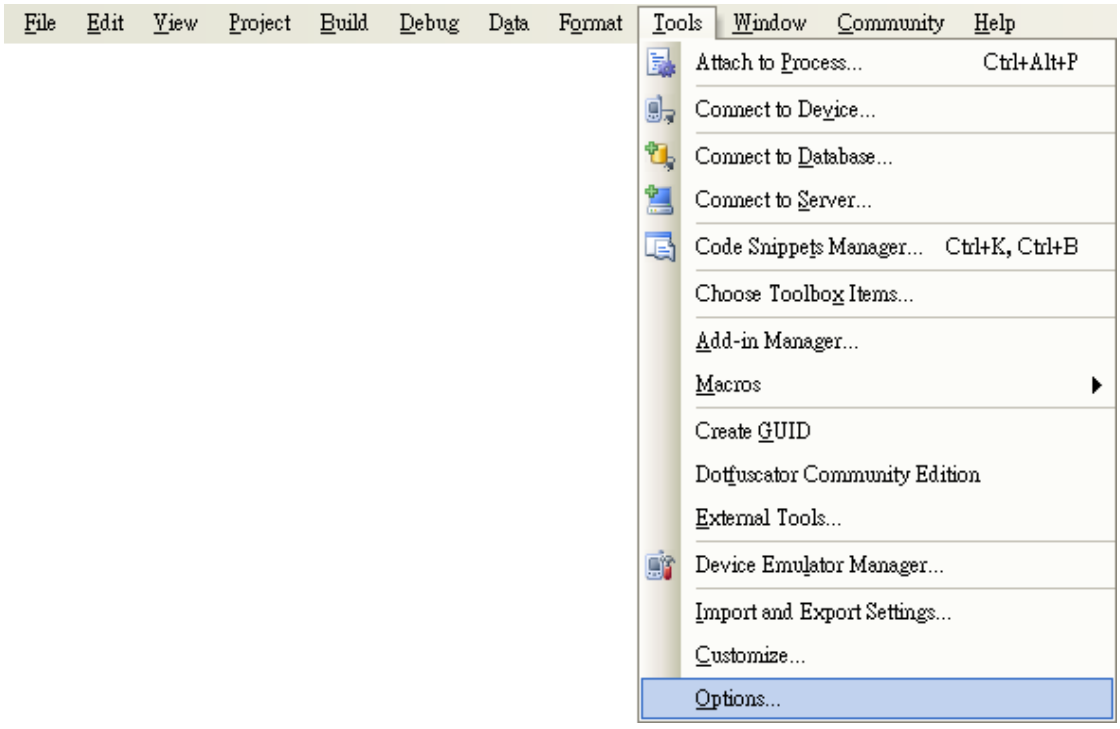

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 6: On the “Options” dialog, select “PAC 270” from the “Show devices platform” list, and then click the “Properties…” button

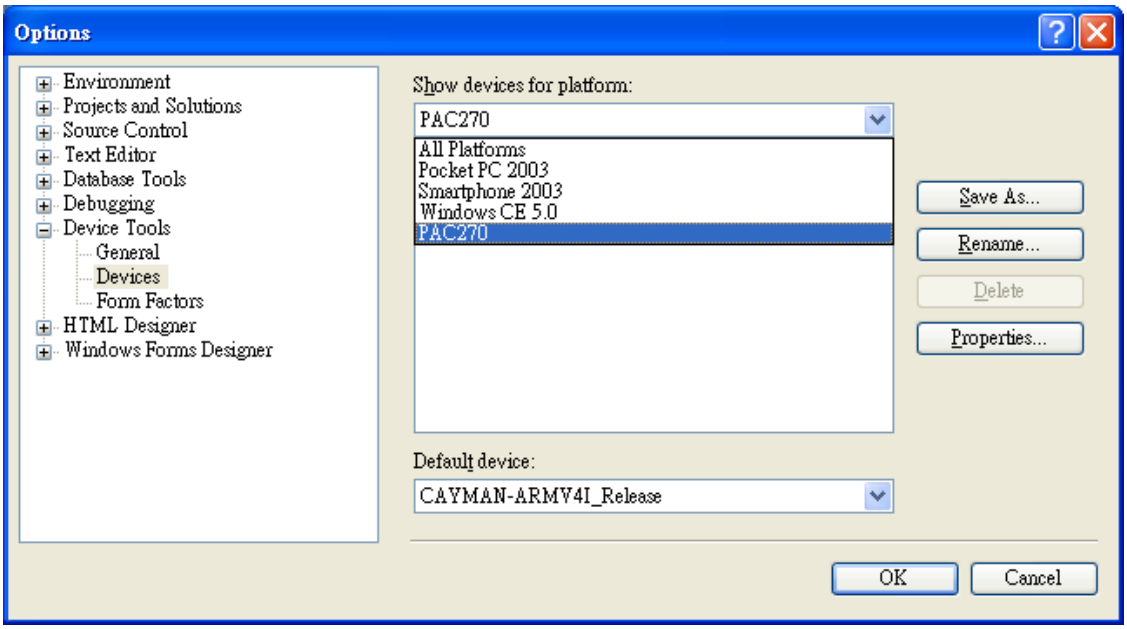

Step 7: On the “CAYMAN-ARMV4I_Release Properties” dialog, click the “Configure…” button

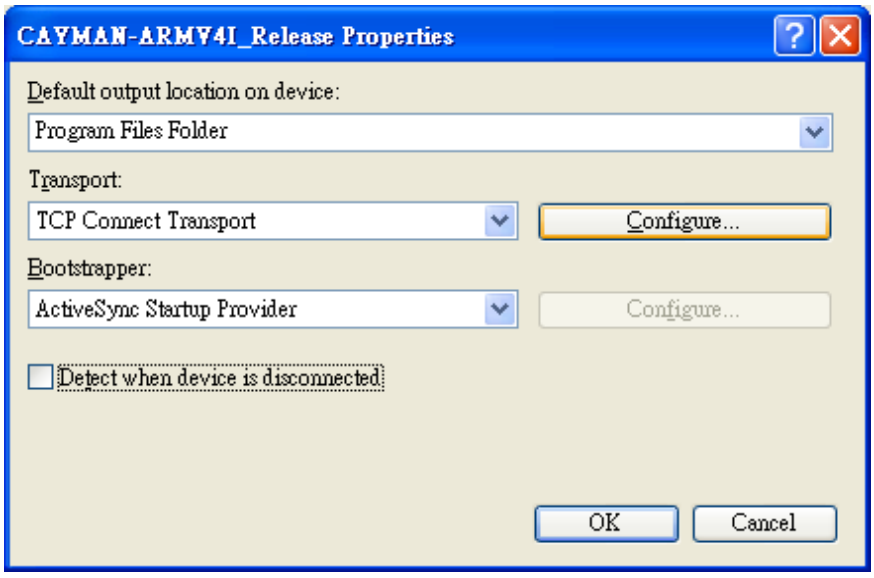

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 8: On the “Configure TCP/IP Transport” dialog, select the “Use specific IP address” option and type the IP address of ViewPAC, and then click the “OK” button

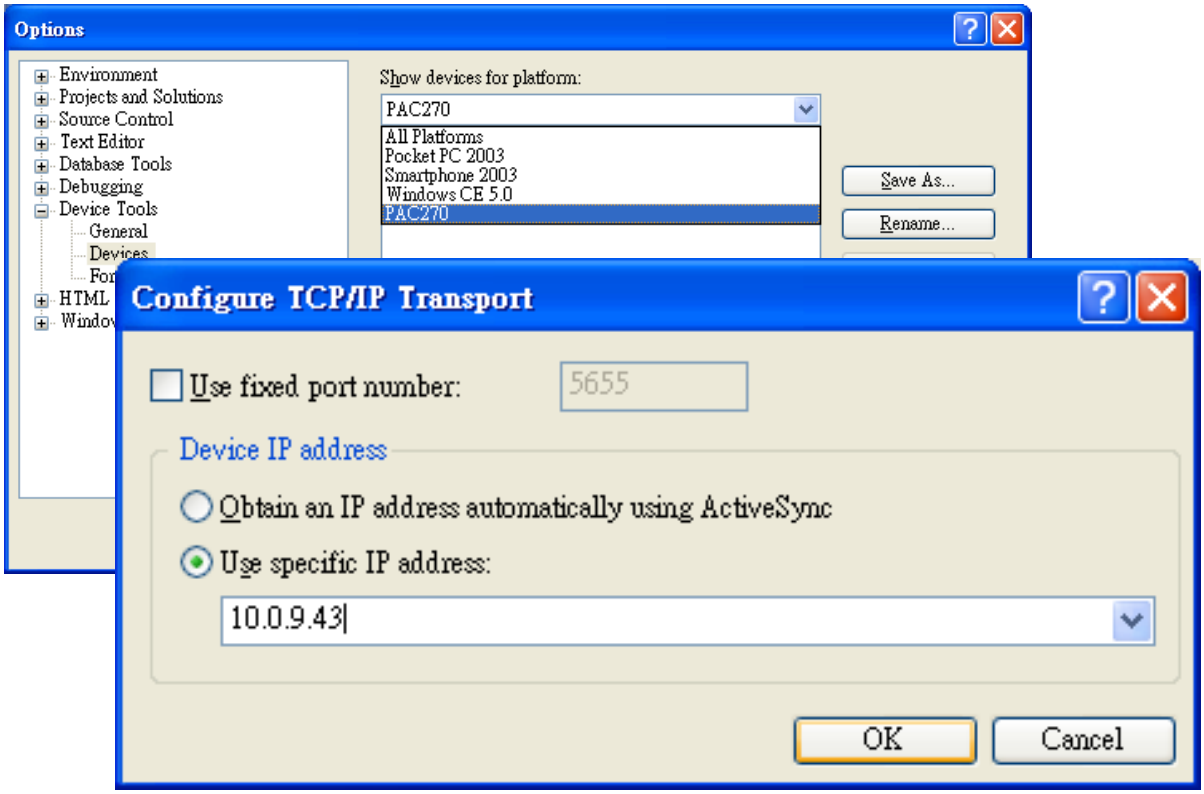

Step 9: On the “CAYMAN-ARMV4I_Release Properties” dialog, click the “OK” button

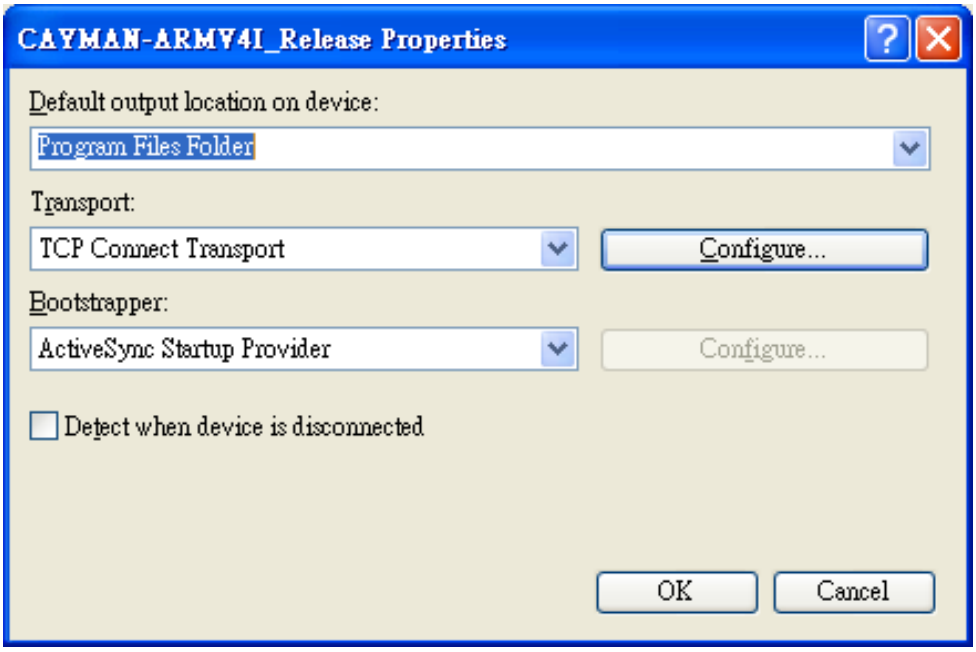

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 10: On the “Options” dialog, click the “OK” button

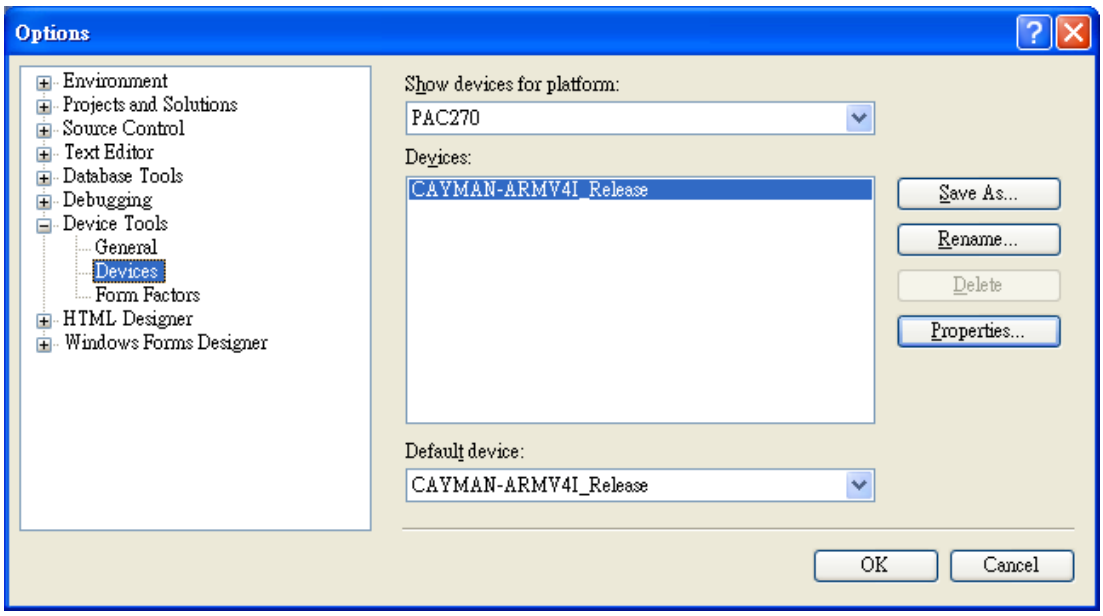

Step 11: On the ViewPAC controller side, run the “CommanClient2” and the “CMAccept.exe” applications which is located at: \System_Disk\ICPDAS\System

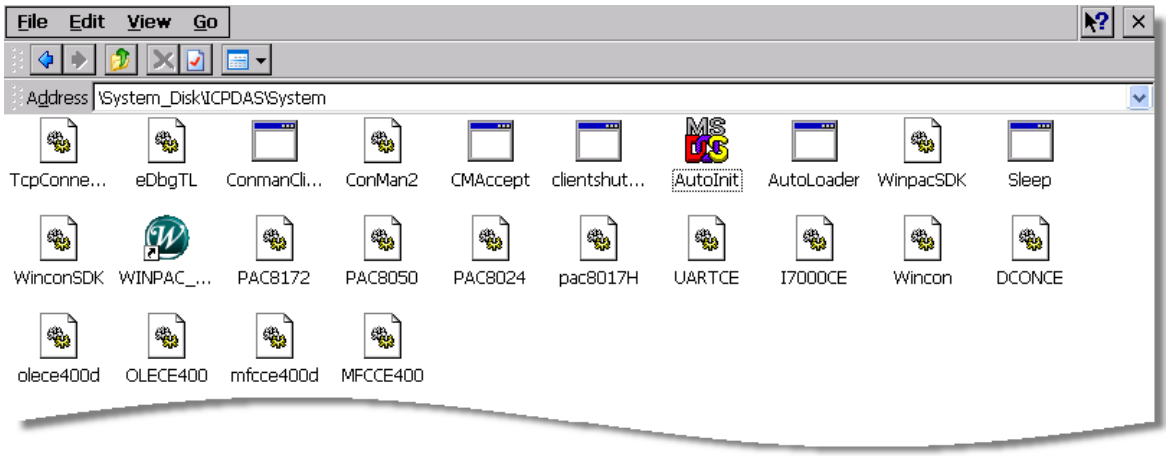

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 12: On the “Tools” menu, click “Connect to Device…” command

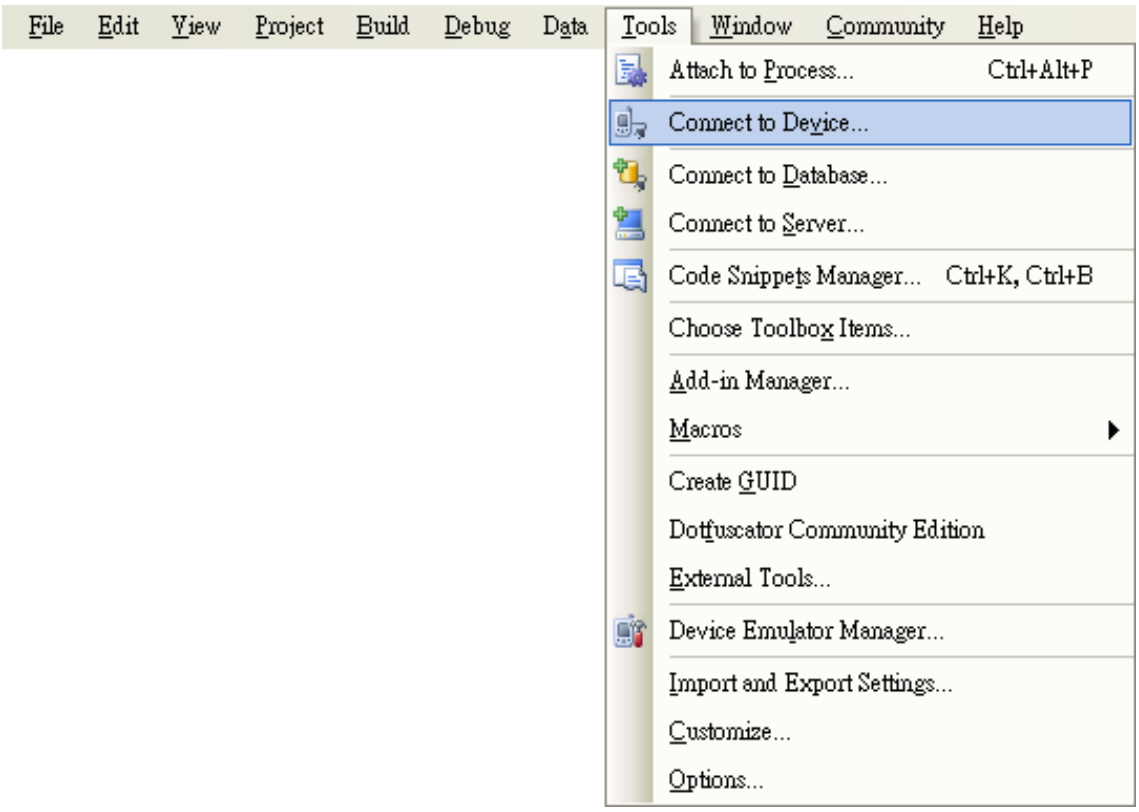

Step 13: On the “Connect to Device” dialog, select “PAC 270” from “Platform” list and then click the “Connect” button

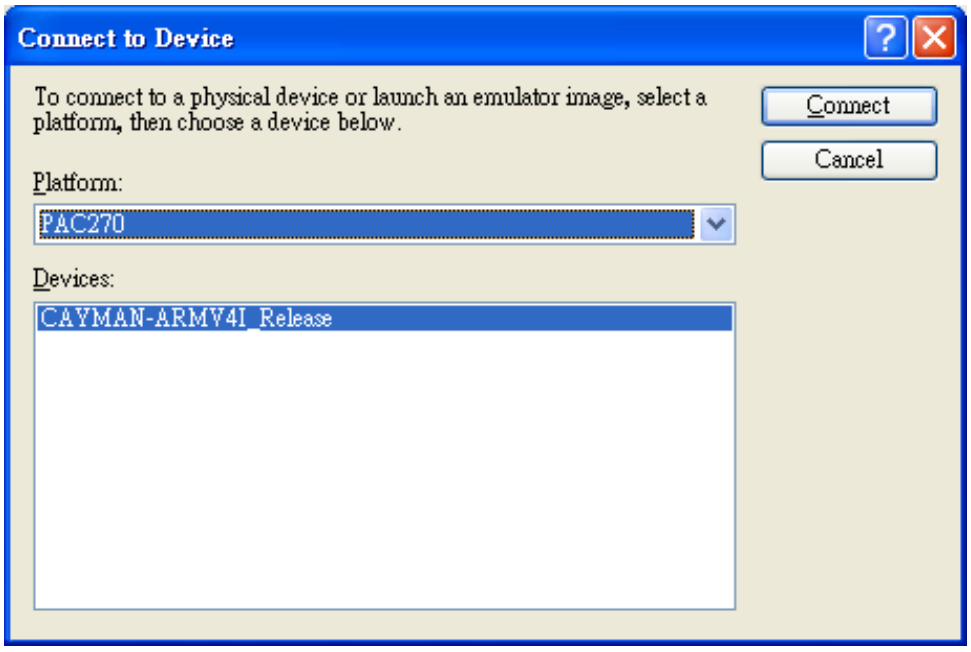

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 14: On the “Tools” menu, click “Connect to Device…” command

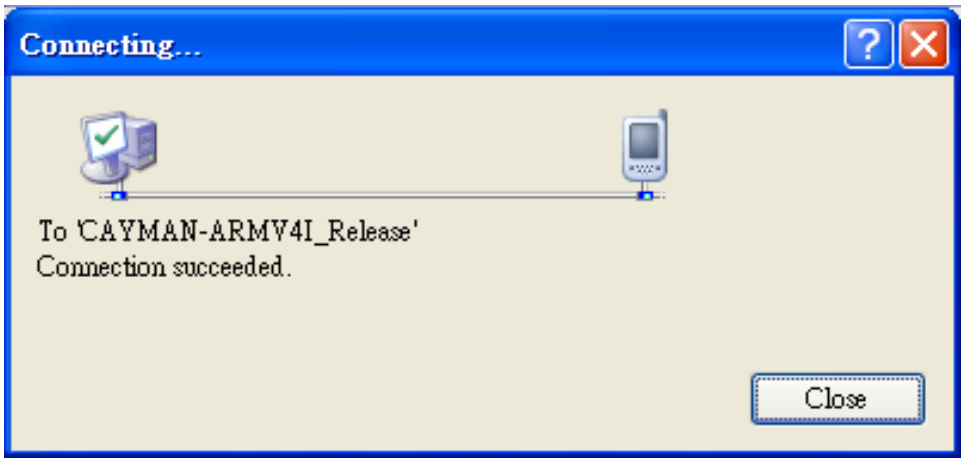

Step 15: Connection established. Then you can debug on line.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

FAQ:

If the connection fails shown as follow, return to step 11 to do the action below

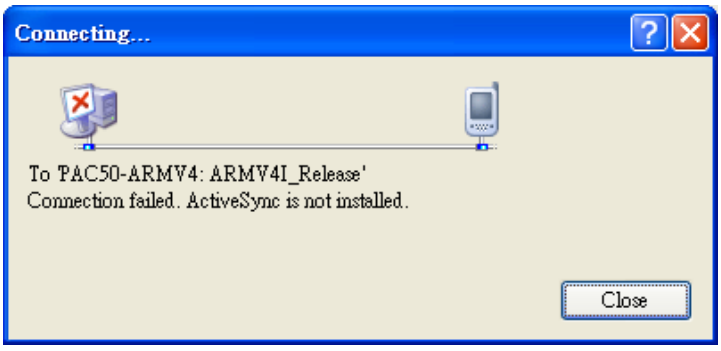

Open the command prompt, run the "CommanClient2.exe/transport:tcpconnectiona.dll/property:port=5000/id:Con" at: \System_Disk\ICPDAS\System, and then run the "CMAccept.exe"

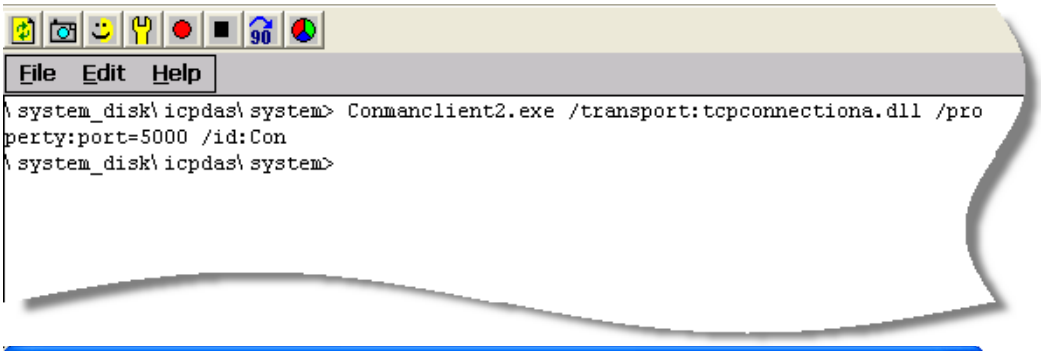
File Edit Help
\ system_disk\ icpdas\ system> Conmanclient2.exe /transport:tcpconnectiona.dll /pro
perty:port=5000 /id:Con
\ system_disk\ icpdas\ system>

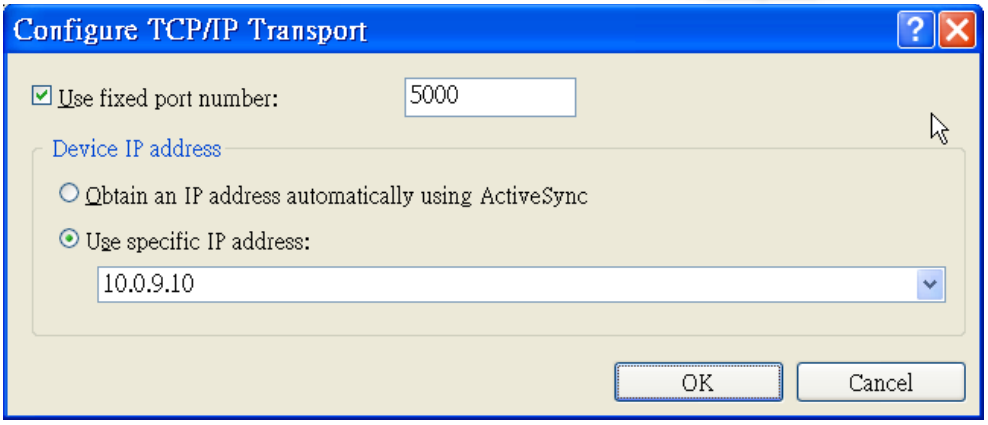

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.3. How to recompile WinCon programs

To recompile Wincon programs to run on ViewPAC, certain components of the programs require adjustments that divides into two parts:

1. Compiler old programs which ran on Wincon 8x3x and 8x4x
2. Modify .vcp file to upgrade the old WinCon project

Tips & Warnings

In general, you only need to do part 1, after this, if the program still can't be compiled to an application, the part 2 just need to do.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

C.3.1. Compiler old programs which ran on Wincon 8x3x and 8x4x

Step 1: Open project which programmed in WinCon using eMbedded Visual C++

Step 2: On the "Build" menu, click "Configurations" command

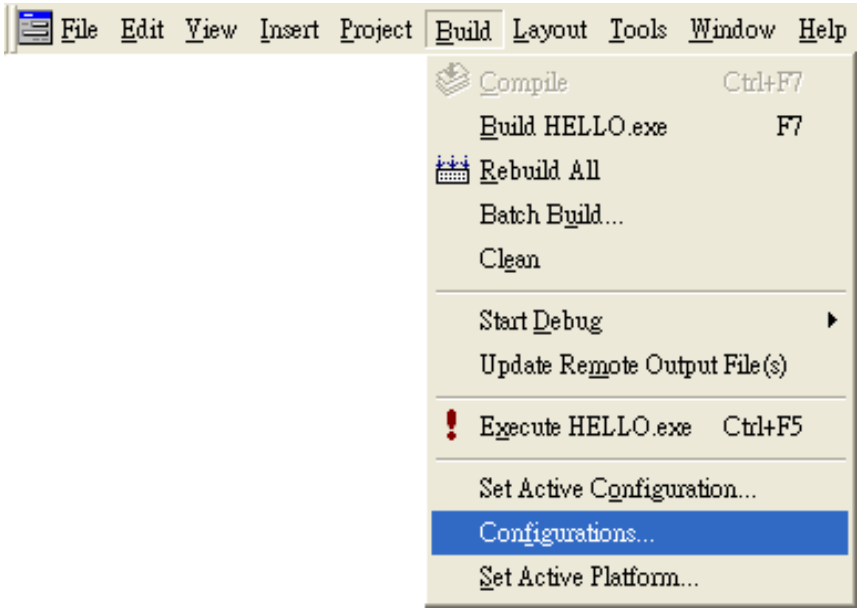

Step 3: Make sure the CPU type is "STANDARDSDK"

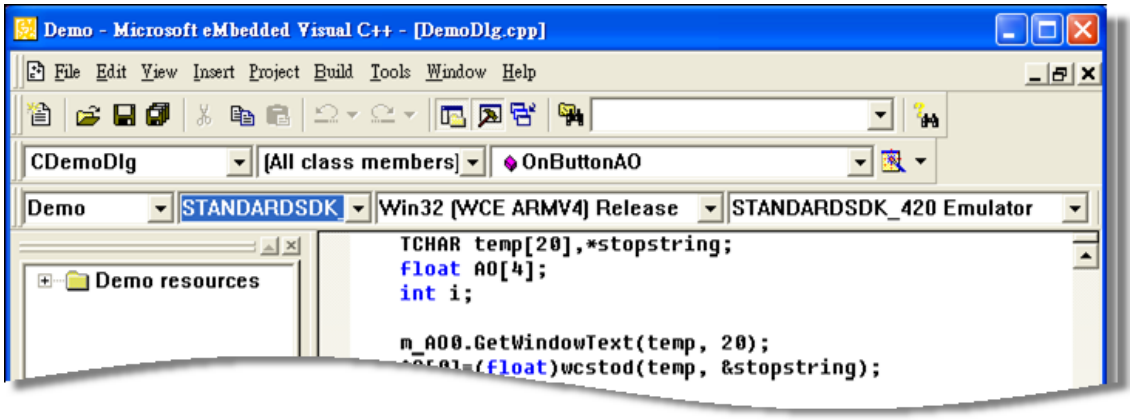

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 4: On the “Configurations” dialog, click the “Add…” button

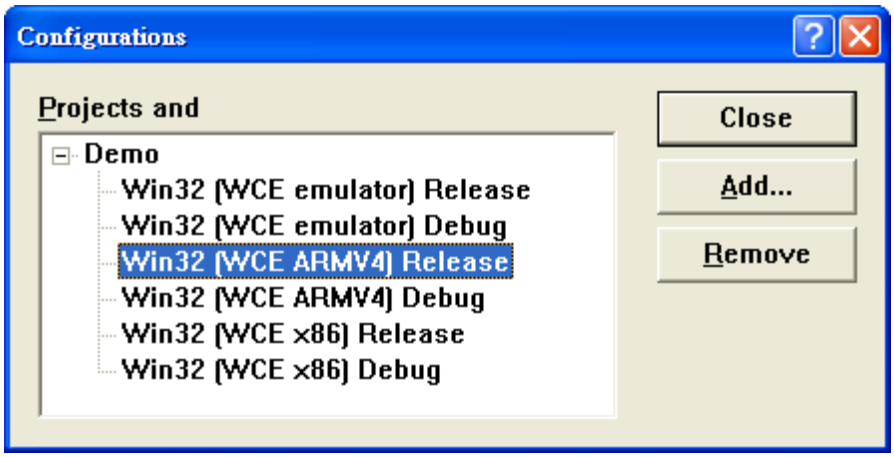

Step 5: On the “Add Project Configuration” dialog, choose one of the CPU type and then click the “OK” button.

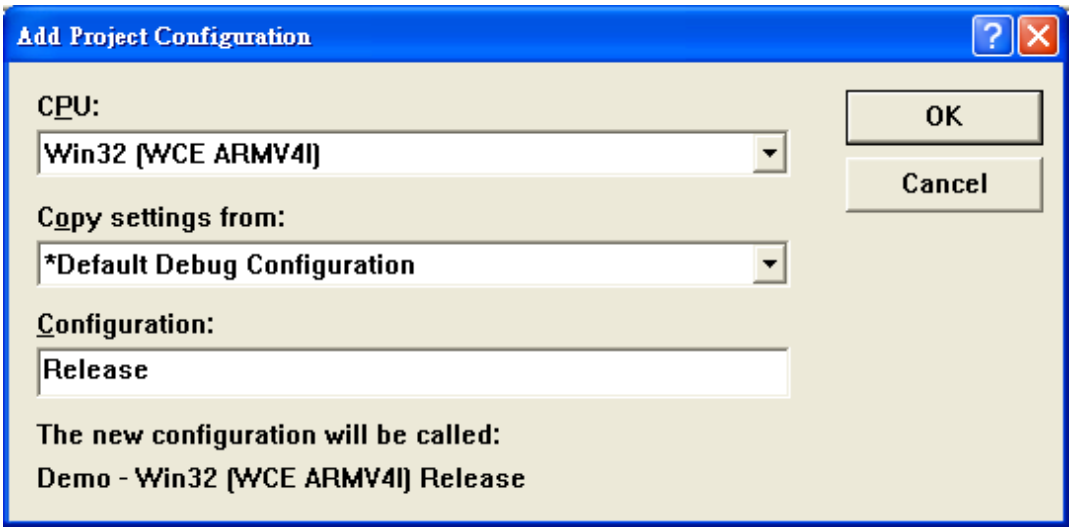

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 6: On the “Project” menu, click “Settings…” command

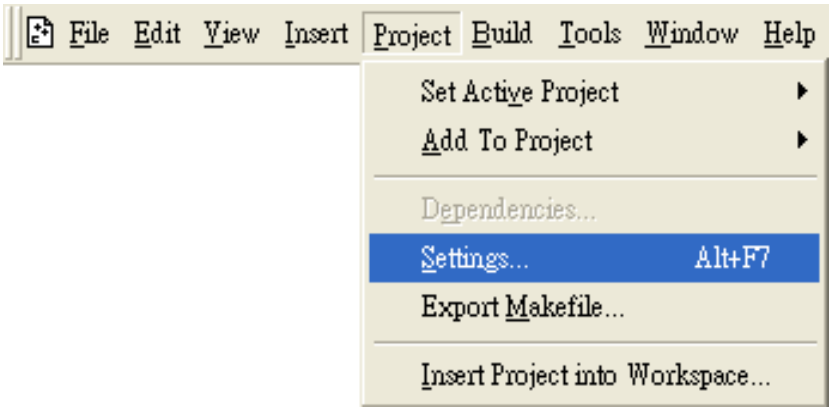

Step 7: On the “Project Settings” dialog, select the “Link” tab and change the value of the “Entry-point symbol” field, “WinMainCRTStarup” to “wWinMainCRTStartup”,

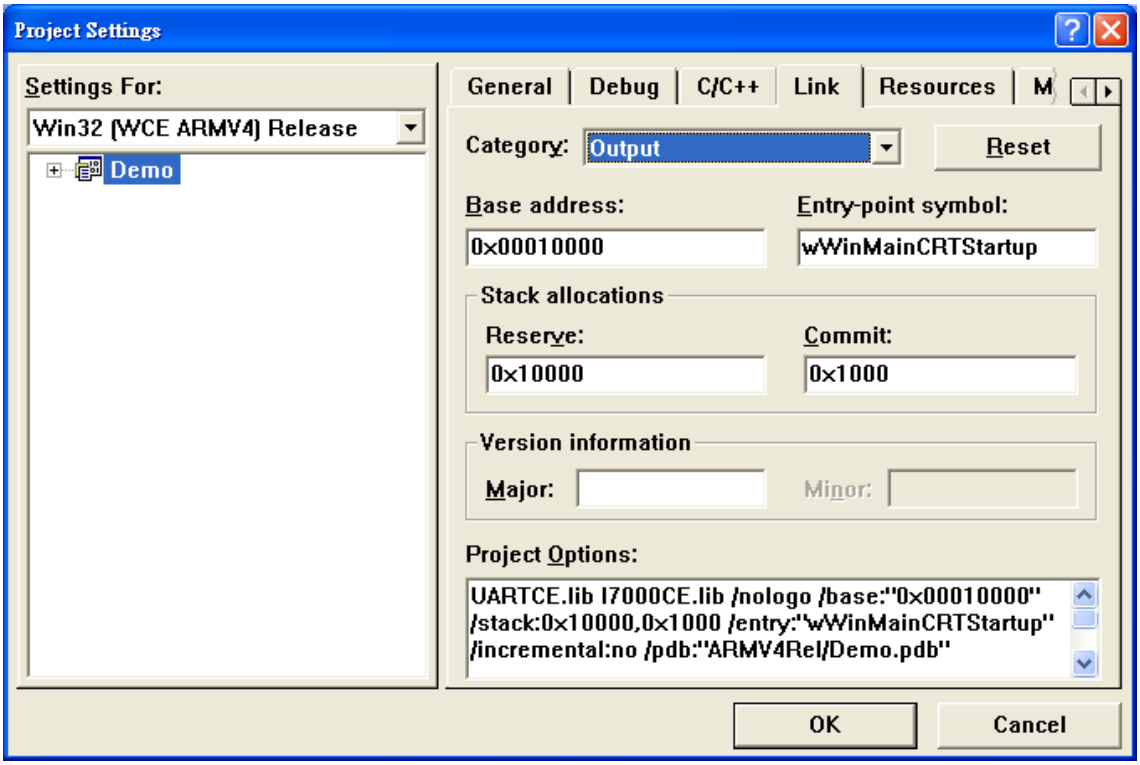

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 8: After performing above-mentioned steps, build the project, your project should build success. If not, it will show error message as follow. Please continue with the following steps

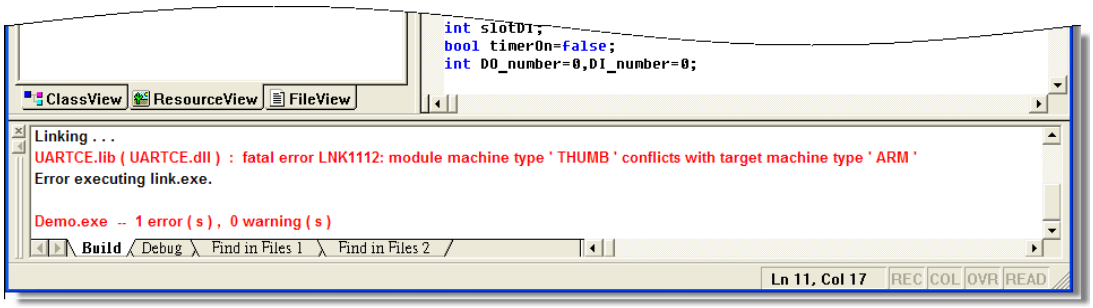
int slotDI;
bool timerOn=false;
int DO_number=0,DI_number=0;
ClassView
ResourceView
FileView
Linking . . .
UARTCE.lib (UARTCE.dll) : fatal error LNK1112: module machine type ' THUMB ' conflicts with target machine type ' ARM '
Error executing link.exe.
Demo.exe - 1 error (s), 0 warning (s)
Build
Debug
Find in Files 1
Find in Files 2
Ln 11, Col 17
REC COL OVR READ

Step 9: On the "Project" menu, click "Settings…" command

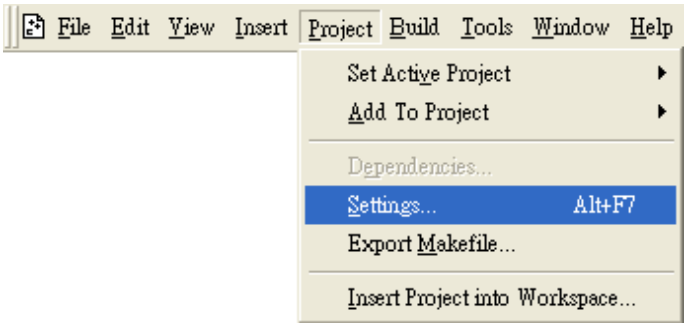

Step 10: On the "Project Settings" dialog, select the "Link" tab and change the value of the "Project Options" field, "ARM" to "THUMB", and then built the project

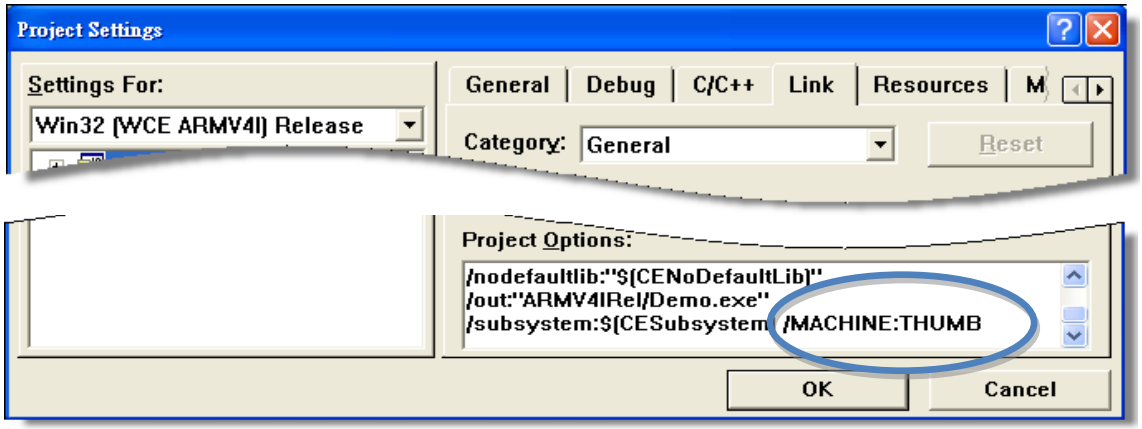

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.3.2. Modify .vcp file to upgrade the old WinCon project

Step 1: Open a text editor to modify the .vcp file

Step 2: In the .vcp file, replace “0xa301” with “0xa501”

Step 3: In the .vcp file, replace “ARMV4” with “ARMV4I”

Step 4: In the .vcp file, replace “MACHINE:ARM” with “MACHINE:THUMB”

Step 5: Save the .vcp file just edited

Step 6: Open the old WinCon project and recompile it

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.4. How to use the printer

ViewPAC have ability to access the printer, you can connect to the printer via Ethernet network or USB.

Tips & Warnings

ViewPAC only supports HP Laser Jet Printers which support PCL6 driver. The following printer support is released by HP

- HP LaserJet 4000 series/HP LaserJet 4100 series
- HP LaserJet 2100 series/HP LaserJet 2200 series
- HP LaserJet 1200
- HP LaserJet 3200/HP LaserJet 3300
- HP LaserJet 4200 series/HP LaserJet 4300 series
- HP LaserJet 5000 series/HP LaserJet 5100 series
- HP LaserJet 8000 series
- HP LaserJet 9000 series printers

If you need the latest support of HP PCL6 printer, you can refer to following link
http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?objectID=bpl04568

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.4.1. How to use network printer

To use a shared network printer, please perform the following steps:

Step 1: On the Host PC, check the name of the Host PC and the shared printer

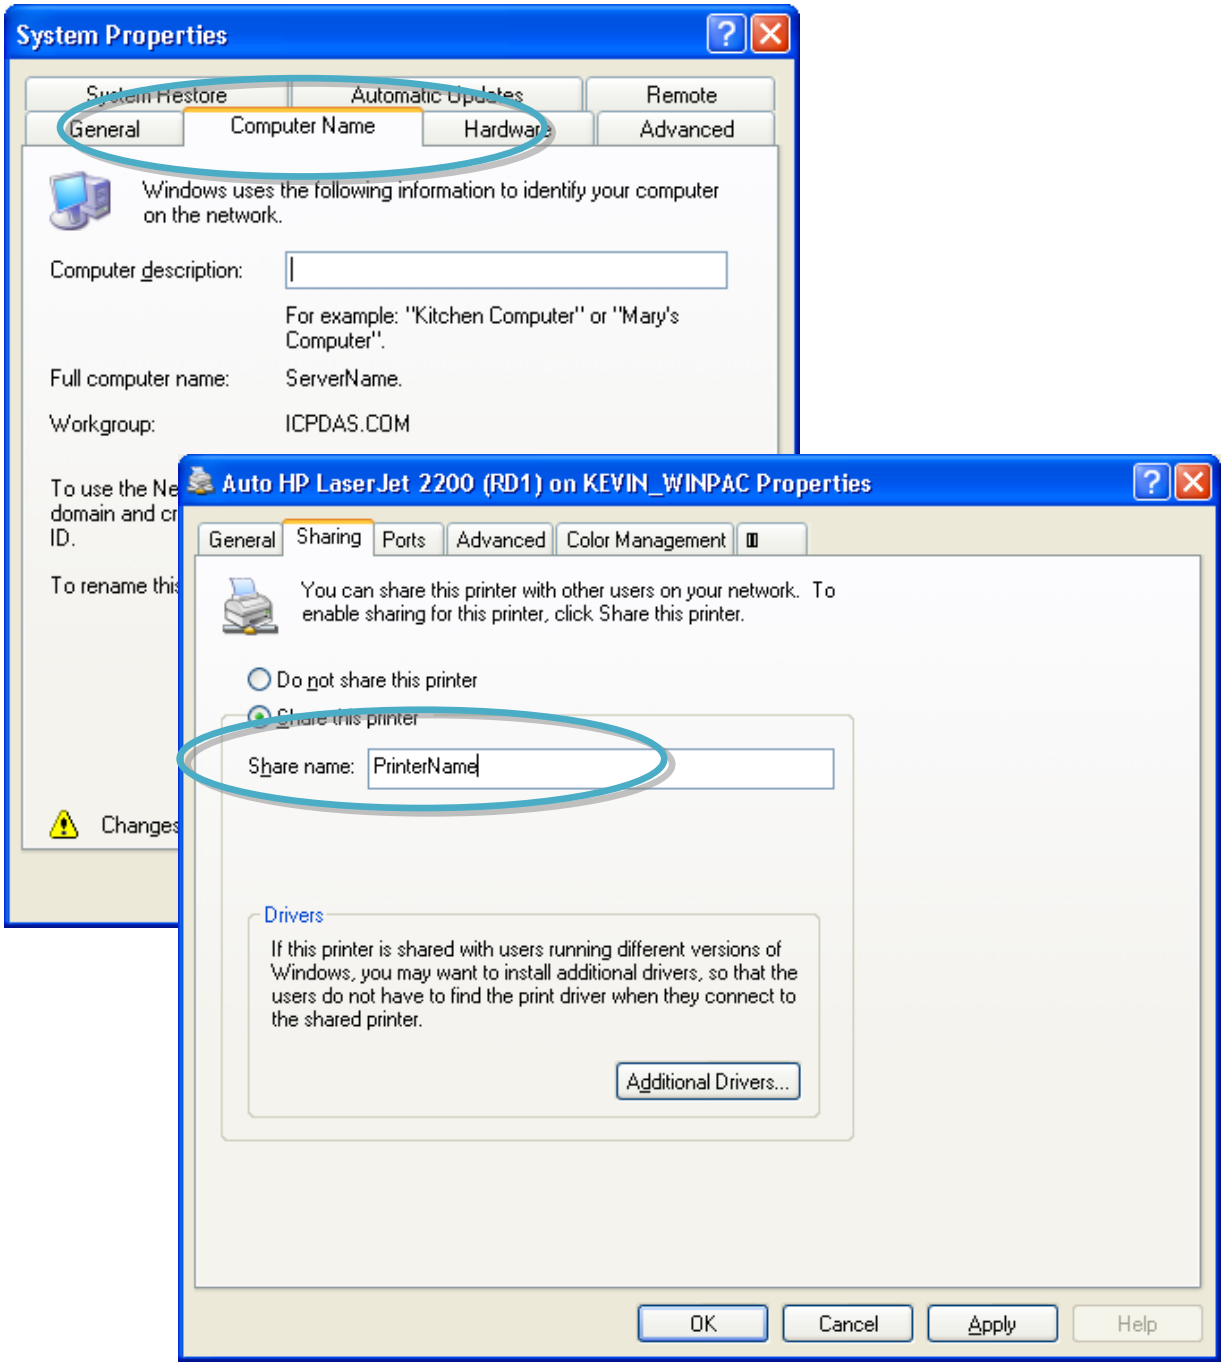
System Properties
Automatic Updates
Remote
General
Computer Name
Hardware
Advanced
Windows uses the following information to identify your computer on the network.
Computer description:
For example: "Kitchen Computer" or "Mary's Computer".
Full computer name:
ServerName.
Workgroup:
ICPDAS.COM
Auto HP LaserJet 2200 (RD1) on KEVIN_WINPAC Properties
General
Sharing
Ports
Advanced
Color Management
You can share this printer with other users on your network. To enable sharing for this printer, click Share this printer.
Do not share this printer
Share name:
PrinterName
Drivers
If this printer is shared with users running different versions of Windows, you may want to install additional drivers, so that the users do not have to find the print driver when they connect to the shared printer.
Additional Drivers...
OK
Cancel
Apply
Help

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: On the ViewPAC, open a WordPad format file

Step 3: On the ViewPAC, open a WordPad format file

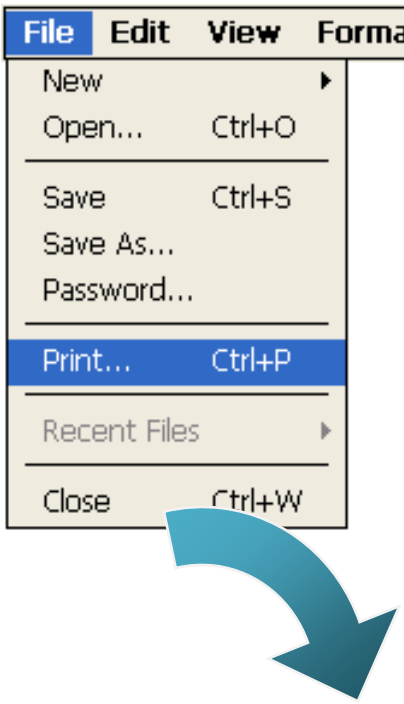

Step 2: Set up the printer

1. Printer: PCL Laser
2. Port: Network
3. Net Path: \\ServerName\PrinterName

   The “ServerName” is your PC’s name or IP.

   The “PrinterName” is your printer’s shared name of your PC
4. Paper Size: Select the paper size



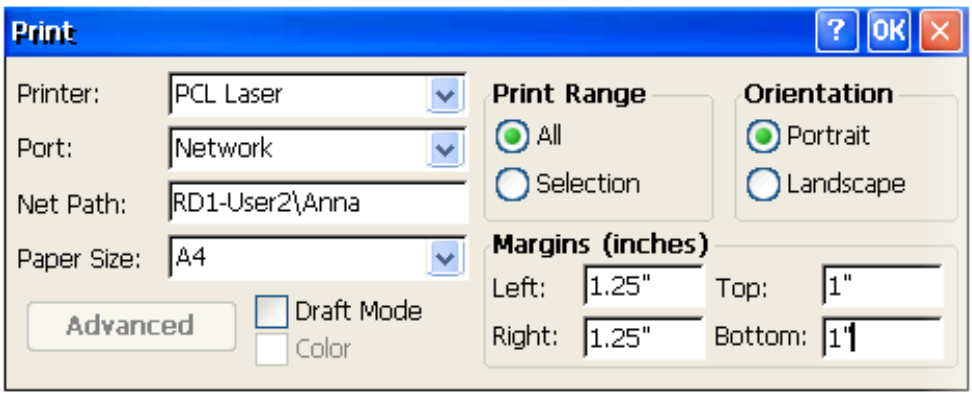

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.4.2. How to use printer via USB

To use a shared network printer via USB, please perform the following steps:

Step 1: On the ViewPAC, open a WordPad format file

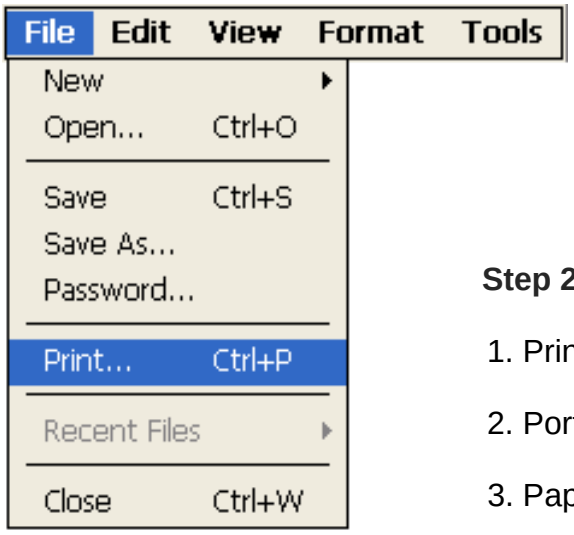

Step 2: Set up the printer

1. Printer: Hewlett-Packard LaserJet
2. Port: LPT1
3. Paper Size: Select the paper size

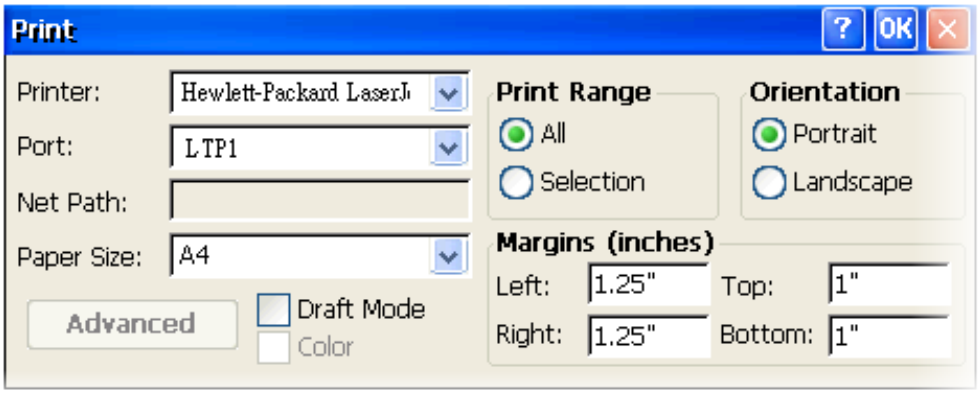

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

C.5. How to use services tool

The services tool can help you turn on, turn off and monitor the WinCE services.

Step 1: Open a MS-DOS command prompt

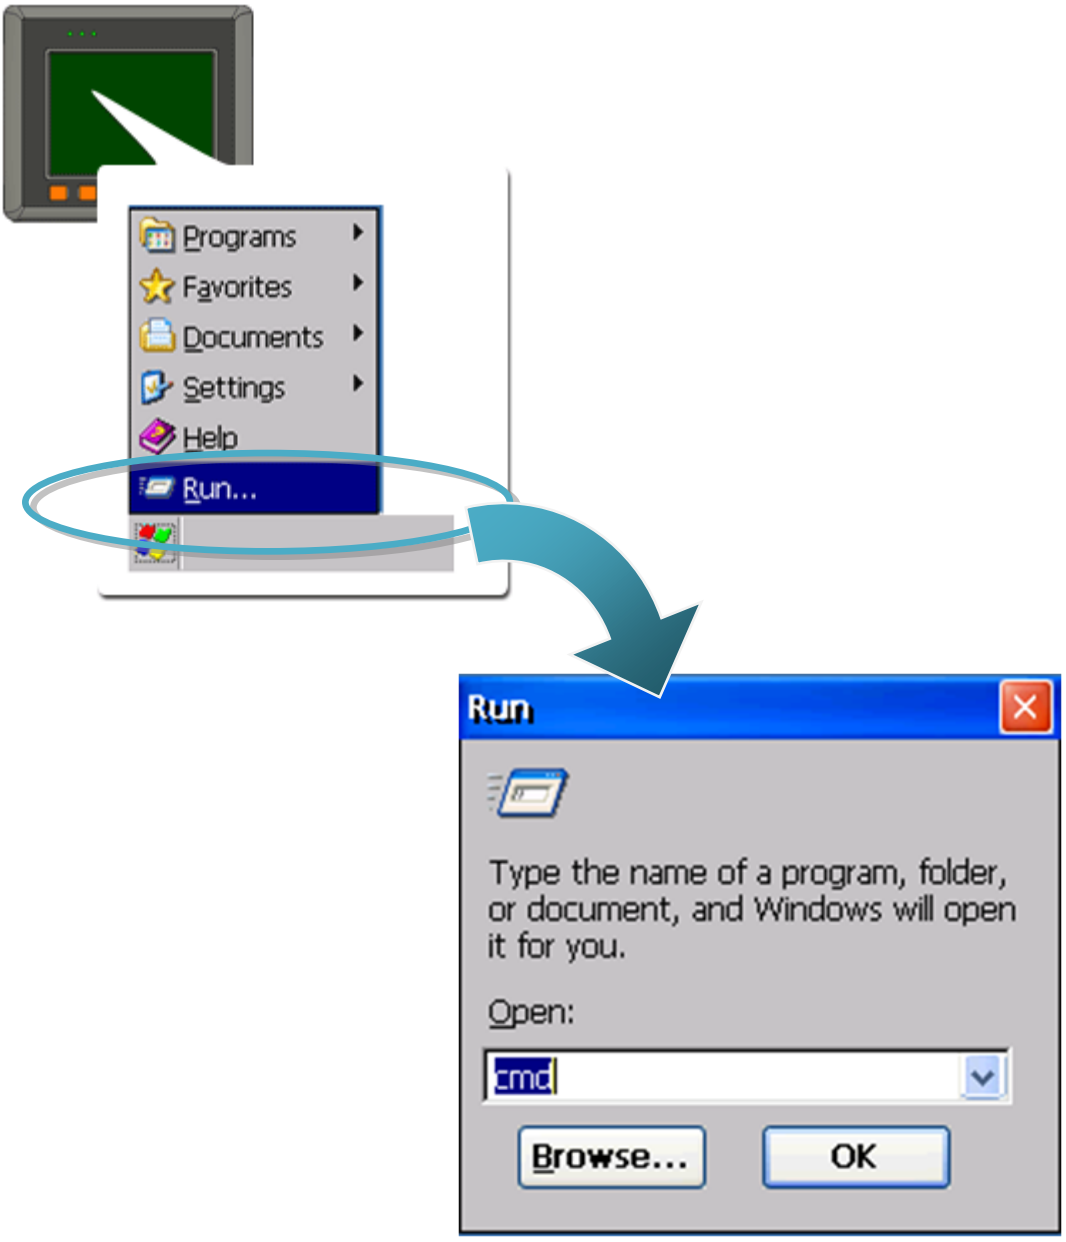

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Step 2: List all services

[Syntax] services list

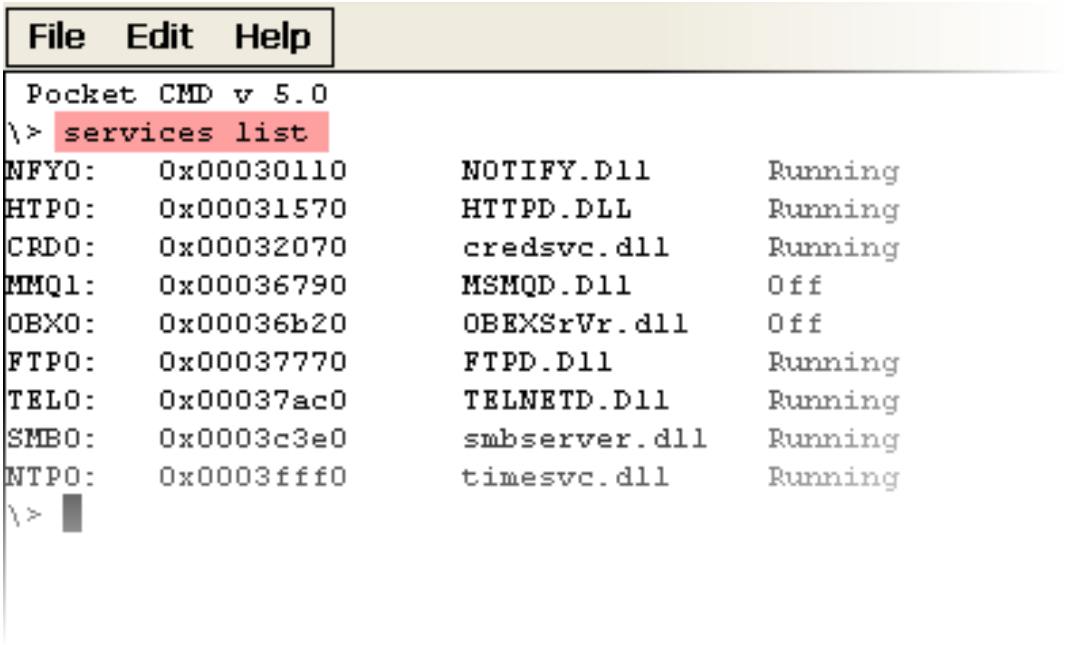

Step 3: Type the commands to configure service

[Syntax] services stop <services name>

For example, turn on the “FTP” service:

services stop FTP0:

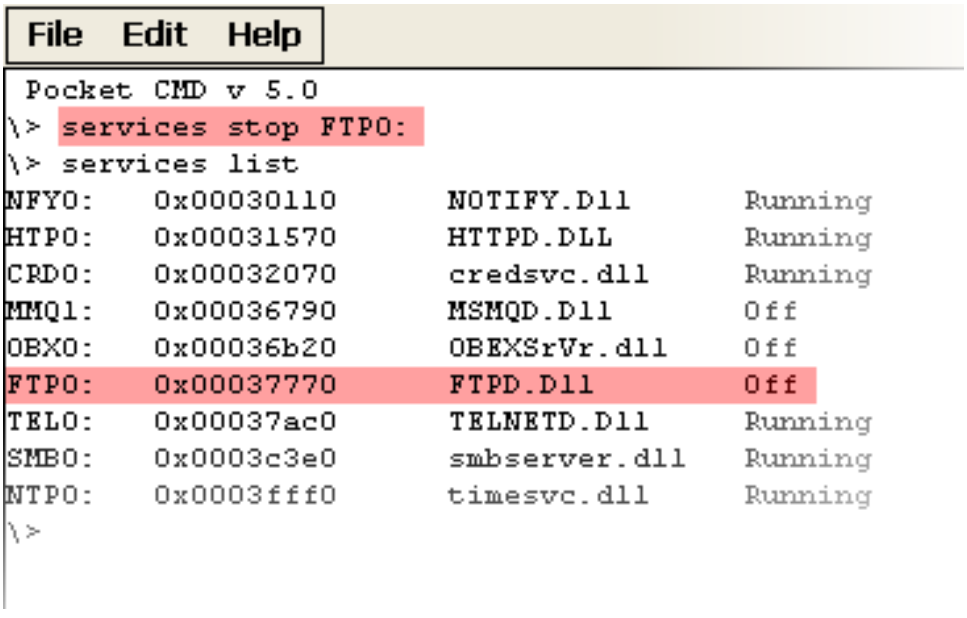

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. * E-mail: service@icpdas.com

Tips & Warnings

For more information about using services tool, you just type “services help”

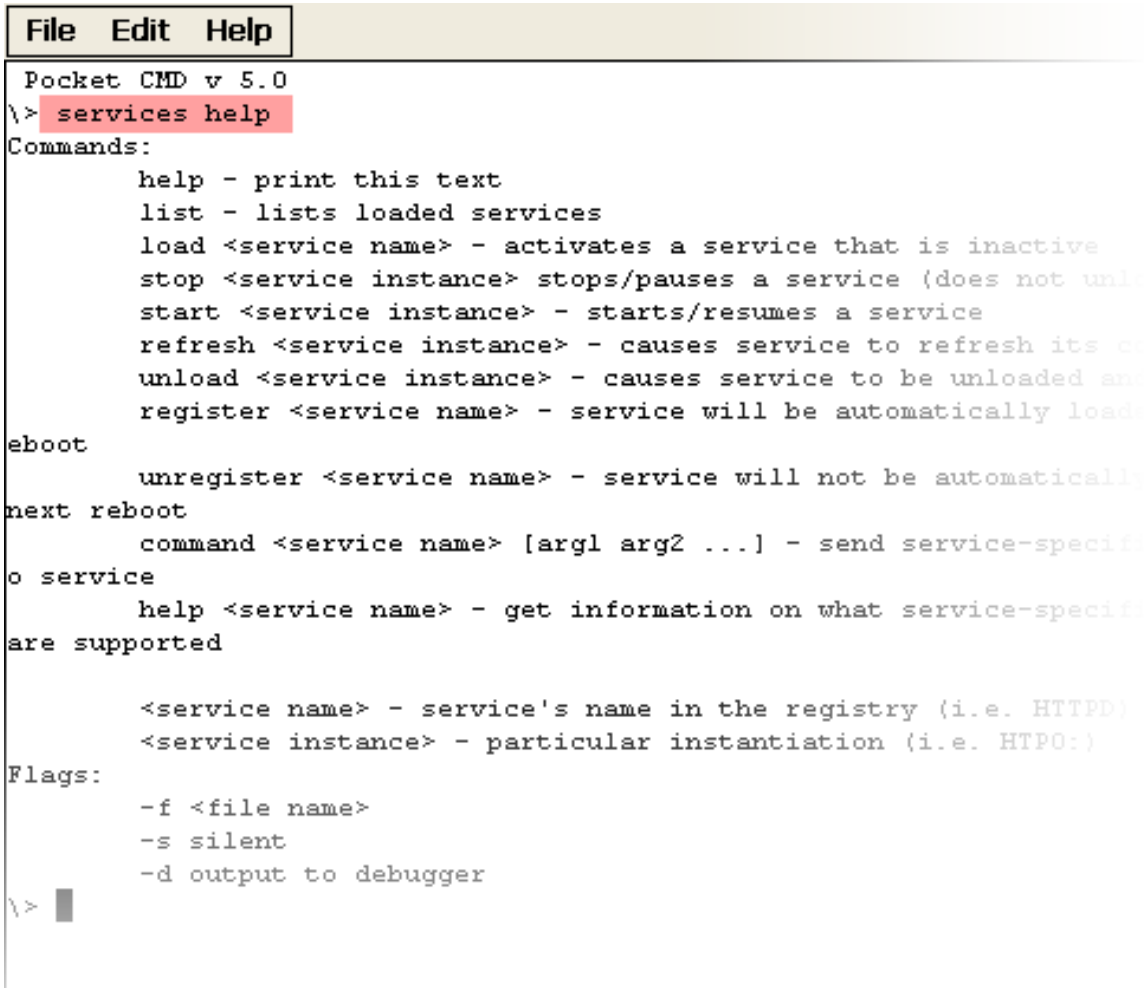

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com

Appendix D. Revision History

Revision	Date	Description
1.0.1	August 2009	Initial issue
1.0.2	September 2009	Added information about the support of the printer driver in section C.4
1.0.3	December 2009	1. Modified the operating modes in section 2.5 2. Added the requirements of the ViewPAC SDK in section 4.3.
1.0.4	February 2010	1. Modified the specification of the Dual Battery Backup SRAM features in section 1.1. 2. Modified information about Operating Environment in section 1.2.
1.0.5	January 2011	1. Added information on how to use Backup Utility to back up the settings and files in section 2.9. 2. Added information about a caution of using System_Disk in section 2.10. 3. Added information about the ViewPAC Utility functionality in section in section 3.5.2. 4. Deleted information on how to establish a new telnet and FTP account in section C.1. 5. Added information on how to add a user account to remote login the ViewPAC from PC in section C.1.
1.0.6	July 2011	1. Added information on the Overview in section 1.4. 2. Modified information about the application of RS-485 network in appendix E.
1.0.7	February 2012	1. Modified the features of the ViewPAC in section .1.1. 2. Modified the specification of the ViewPAC in section 1.2.
1.0.8	July 2012	1. Added information about COM2 in section 1.3. 2. Added information about how to use the printer in appendix C.4.
1.0.9	October 2012	Modified information about ViewPAC Platform SDKs in chapter 4.

Copyright © 2012 ICP DAS Co., Ltd. All Rights Reserved. ∗ E-mail: service@icpdas.com